

DR-605T/E/TE1/TE2

Service Manual

CONTENTS

● SPECIFICATIONS

1) General.....	2
2) Transmitter	2
3) Receiver.....	2

● CIRCUIT DESCRIPTION

1) Frequency Configuration.....	3
2) Receiver Sytem	3-4
3) Power Supply Circuit.....	4
4) AF Signal Circuit.....	5
5) Transmitter System.....	5-6
6) PLL Circuit.....	6
7) Front CPU and Peripheral Circuit.....	7
8) Cross Band Repeater Circuit.....	7
9) Tone Burst Output Circuit.....	7
10) CTCSS Tone Encoder Circuit.....	8
11) CTCSS Tone Decoder Circuit.....	8
12) 9600bps Packet Circuit.....	8
13) Clone Circuit	8
14) CPU/I/O Port.....	9-10

● SEMICONDUCTOR DATA

1) AK2341	11
2) AN78L05M	12
3) AN8010M	12
4) AT24C16N-10SI-2.7	12
5) LA4425A	12
6) M64076GP	13
7) M57788	14
8) M67746	14
9) M68702H	14
10) MC3372VM	15
11) MC7808CT	15
12) NJM4558	16
13) RH5VA60AA	16
14) RN5VL25AA-T1	16
15) TC4W53FU	17
16) Transistor, Diode and LED Outline Drawings	17
17) LCD Connection	18

● EXPLODED VIEW

1) LCD Assembly.....	19
2) VHF Unit Assembly.....	20
3) UHF Unit Assembly.....	21

● PARTS LIST

VHF MAIN Unit.....	22-23
UHF MAIN Unit.....	24-26
FRONT CPU Unit.....	26-27
VHF VCO Unit.....	27-28
UHF VCO Unit.....	28
TCXO Unit.....	28
Mechanical Parts.....	28
PCB Unit.....	28
SP Unit.....	28
Packing.....	28

● ADJUSTMENT

1) Required Test Equipment.....	29-30
2) UHF PLL Adjustment	30
3) UHF RX Adjustment.....	31
4) UHF TX Adjustment	32
5) VHF PLL Adjustment	33
6) VHF RX Adjustment.....	33
7) VHF TX Adjustment	34
8) Adjustment Points	35

● PC BOARD VIEW

1) VHF Main Unit Side A.....	36
2) VHF VCO Unit Side A.....	36
3) UHF Main Unit Side A.....	37
4) UHF VCO Unit Side A.....	37
5) VHF Main Unit Side B.....	38
6) VHF VCO Unit Side B.....	38
7) UHF Main Unit Side B.....	39
8) UHF VCO Unit Side B.....	39
9) Front Unit Side A	40
10) Front Unit Side B	40
11) TCXO Unit	40

● SCHEMATIC DIAGRAM

1) CPU Unit.....	41-42
2) VHF Main Unit T/E.....	43-44
3) VHF Main Unit TE1/TE2.....	45-46
4) UHF Main Unit T/E.....	47-49
5) UHF Main Unit TE1/TE2	49-50
6) VHF PLL-VCO Unit.....	51-52
7) UHF PLL-VCO Unit.....	51-52
8) TCXO Unit	51-52

● BLOCK DIAGRAM

ALINCO, INC.

SPECIFICATIONS

1) General

Frequency Range:

(Version T)	VHF BAND	136.000 ~ 173.995MHz (RX)
		144.000 ~ 147.995MHz (TX)
	UHF BAND	420.000 ~ 470.000MHz (RX)
		430.000 ~ 449.995MHz (TX)
(Version E)	VHF BAND	144.000 ~ 145.995MHz (RX/TX)
	UHF BAND	430.000 ~ 439.995MHz (RX/TX)
(Version TE1)	VHF BAND	136.000 ~ 173.995MHz (RX/TX)
	UHF BAND	400.000 ~ 420.000MHz (RX/TX)
(Version TE2)	VHF BAND	136.000 ~ 173.995MHz (RX/TX)
	UHF BAND	450.000 ~ 470.000MHz (RX/TX)

Modulation:

F3E (FM)

Antenna Impedance:

50Ω

Supply Voltage:

13.8 Volts DC

Ground:

Negative

Current Consumption

VHF TX 50W: 11.5A max. (T/E), 35W: 11.0A max. (TE1/TE2)
UHF TX 35W: 10.0A max.
RX 1.2A max.

Frequency Stability:

±10ppm max.

Dimensions (Body only):

140(W)mm x 40(H)mm x 176(D)mm

Weight:

1.1kg

Cannel

VHF: 51 / UHF: 51 total 102

2) Transmitter

Output Power:

VHF BAND High: 50W / Low: approx. 5W (T/E)
High: 35W / Low: approx. 5W (TE1/TE2)
UHF BAND High: 35W / Low: approx. 5W

Modulator:

Reactance modulation

Spurious Emission:

-60dB max.

Max. Deviation:

±5kHz

Mod. Distortion (@60% mod.):

3% max. (300 to 3000Hz)

Microphone Impedance:

2kΩ

3) Receiver

Rx System:

Double Superheterodyne

Intermediate Frequency:

VHF: First: 21.7MHz / Second: 450kHz
UHF: First: 30.85MHz / Second: 455kHz

Sensitivity (12dB SINAD):

Main band: -16dBμ (0.16μV) or less

Selectivity:

-6dB: 12kHz min., -60dB: 28kHz max.

Squelch Sensitivity:

-20dBμ (0.1μV) or less

AF Output (@5% distortion):

2W or more (8Ω load)

Speaker Output Impedance:

8Ω

Note: Specifications are subject to change without notice or obligation.

Specifications guaranteed in the amateur band only. (T/E)

CIRCUIT DESCRIPTION

1) Frequency Configuration

- VHF and UHF bands have each PLL independently, and 2 IF systems are provided. Therefore 2 bands can be received simultaneously.
- The received signal of VHF band is mixed with the first local oscillator signal and converted into the first IF of 21.70MHz. Then the resulting signal is mixed with the second local oscillator signal of 21.25MHz and converted into 450kHz.
- The received signal of UHF band is mixed with the first local oscillator signal and converted into the first IF of 30.85kHz. Then the resulting signal is mixed with the second local oscillator signal of 30.395MHz and converted into 455kHz.

2) Receiver System

1. Receiver Circuit

The received signal from the antenna is passed through the duplexer (the circuit consists of low-pass filter for VHF and high-pass filter for UHF), and divided into the signals of VHF and UHF.

1-1 144M Band Receiver Circuit

After the received signal from the duplexer is passed through the band-pass filter via the antenna switch (D5, D6), the signal is amplified at RF amplifier Q11. The unwanted signal of the amplified signal is eliminated by the band-pass filter consisting of 3 varicaps. Next the signal is mixed with the first local oscillator signal at the first mixer Q12, and converted to the first IF. The unwanted signal is attenuated by the crystal filter circuit. Then the signal is fed to IC2 Pin16 after being amplified at IF amplifier Q7. In this IC2 the signal is mixed with the second oscillator signal and converted to the second IF, then it is output from Pin3. The output signal is attenuated the unwanted signal by the ceramic filter, and input again from IC2 Pin5. Next the signal is passed through the limiter amplifier and demodulated in the quadrature detection circuit of IC2 to be output from Pin9 as AF signal.

1-2 430M Band Receiver Circuit

The received signal from the duplexer is passed through the antenna switch (D206, D207), and amplified in the RF amplifier Q211. The amplified signal is attenuated the unwanted signal by the helical filter L218. The signal is amplified in RF amplifier Q212 and attenuated the unwanted signal again by the helical filter L219, then it is mixed with the first local oscillator signal at the first mixer Q213 and converted to the first IF. The unwanted signal is attenuated by the crystal filter circuit. Then the signal is fed to IC202 Pin16 after being amplified at IF amplifier Q214. In this IC202 the signal is mixed with the second oscillator signal and converted to the second IF, then it is output from Pin3. The output signal is attenuated the unwanted signal by the ceramic filter, and input again from IC202 Pin5. Next the signal is passed through the limiter amplifier and demodulated in the quadrature detection circuit of IC202 to be output from Pin9 as AF signal.

2. S (Signal) Meter Circuit

VHF:

The S meter signal DC voltage which is output from IC2 Pin13 is supplied to IC401 Pin10 via Trim. pot VR1, then it is digitized by A/D converter to be indicated on LCD as the S meter.

UHF:

The S meter signal DC voltage which is output from IC202 Pin13 is supplied to IC401 Pin5 via Trim. pot VR202 then it is digitized by A/D converter to be indicated on LCD as the S meter.

3. Squelch Circuit

VHF Squelch Circuit:

The AF signal which is output from IC2 Pin9 is input to Pin10. Only the noise is amplified by the active filter in IC2 and output from Pin11, then amplified by the noise amplifier Q6. The amplified noise is rectified to DC voltage by D2 and input to CPU IC401 Pin9 via Trim. pot VR2. In the IC the input voltage and the settled voltage by the squelch knob are compared to work the squelch ON/OFF. When the squelch is open, the squelch signal "H" is output from IC401 Pin41 and LED D401 (green) lights.

UHF Squelch Circuit:

The AF signal output from IC202 Pin9 is input to Pin10. Only the noise is amplified by the active filter in IC2 and output from Pin11, then amplified by the noise amplifier Q206. The amplified noise is rectified to DC voltage by D202 and input to CPU IC401 Pin5 via Trim. pot VR201. In the IC the input voltage and the settled voltage by the squelch knob are compared to work the squelch ON/OFF. When the squelch is open, the squelch signal "H" is output from IC401 Pin13 and LED D402 (green) lights.

3) Power Supply Circuit

1. VHF Power Supply Switch Circuit and Unlock Circuit

In the receiving mode, "H" is output from PLL shift register IC501 Pin16 according to the serial data from CPU, and Q17 and Q16 are turned ON, then 8V is added to 8RV line. In the transmitting mode, just same as the receiving mode, "H" is output from IC501 Pin17, and Q19 and Q18 are turned ON, then 8V is added to 8TV line. When PLL is unlocked, the unlock switch Q21 is turned ON because "H" is output from UL terminal of PLL-VCO unit. Then 8TV switch Q19 is turned OFF. Consequently, as 8TV line does not work, the unit does not transmit when PLL is unlocked.

2. UHF Power Supply Switch Circuit and Unlock Circuit

In the receiving mode, "H" is output from PLL shift register IC601 Pin16 according to the serial data from CPU, and Q217 and Q218 are turned ON, then 8V is added to 8RV line. In the transmitting mode, just same as the receiving mode, "H" is output from IC601 Pin17, and Q220 and Q219 are turned ON, then 8V is added to 8TV line. When PLL is unlocked, the unlock switch Q222 is turned ON because "H" is output from UL terminal of PLL-VCO unit. Then 8TV switch Q220 is turned

OFF. Consequently, as 8TV line does not work, the unit does not transmit when PLL is unlocked.

4) AF Signal Circuit

1. VHF AF Signal

The AF signal which is output from IF unit IC2 Pin9 is made the AF frequency characteristics 3kHz or below by the de-emphasis circuit (consisting of R19, C18, R13, C10, R12 and C9), then amplified by AF preamplifier Q3. Besides the amplified signal is made the AF frequency characteristics 300Hz or more by the de-emphasis circuit (consisting of C5, R8, C4, R3, C3). The de-emphasized AF signal ROV is muted and after the signal is adjusted by volume VR401, added to AF power amplifier IC3 Pin1 and amplified to drive the speaker.

2. UHF AF Signal

The AF signal which is output from IF unit IC202 Pin9 is made the AF frequency characteristics 3kHz or below by the de-emphasis circuit (consisting of R226, C213, R222, C211, R221 and C210), then amplified by AF preamplifier Q203. Besides the amplified signal is made the AF frequency characteristics 300Hz or more by the de-emphasis circuit (consisting of C207, R210, C206, R207, C205). The de-emphasized AF signal ROU is muted and after the signal is adjusted by volume VR402, added to AF power amplifier IC3 Pin1 and amplified to drive the speaker.

3. AF Mute Circuit

VHF:

When the squelch is turned ON and there is no input signal, the output control signal of the microcomputer IC401 Pin42 turns ON double mute switches Q2 and Q4, then the input signal of audio power amplifier IC3 is cut to mute the speaker output.

UHF:

When the squelch is turned ON and there is no input signal, the output control signal of the microcomputer IC401 Pin19 turns ON double mute switches Q204 and Q233, then the input signal of audio power amplifier IC3 is cut to mute the speaker output.

5) Transmitter System

1. Modulator Circuit VHF/UHF

After the voice is converted into the electric signal by the microphone, the signal is led to the microphone amplifier Q401 to be amplified. The microphone amplifier includes the pre-emphasis circuit. The amplified voice signal is added to the IDC circuit of operational amplifier IC203 and limited the band width. Each frequency deviation can be adjusted in VR3 (VHF) or VR204 (UHF). The signal is added to varicap of VHF/UHF VCO unit for reactance modulation.

2. Drive/PA Amplifier Circuit

VHF:

The transmit signal from VCO of VHF band is amplified by the younger amplifiers Q9, Q10, then input to the power module IC1. The signal amplified to the desired level in IC1, is passed through the low-pass filter, antenna switch, and low-pass filter in duplexer to attenuate the second and third harmonics enough, then supplied to the antenna.

UHF:

The transmit signal from VCO of VHF band is amplified by the younger amplifiers Q208, Q209, Q210 then input to the power module IC201. The signal amplified to the desired level in IC201, is passed through the low-pass filter, antenna switch, and low-pass filter in duplexer to attenuate the second and third harmonics enough, then supplied to the antenna.

3. APC circuit

VHF:

A part of output power from low-pass filter is detected by Diodes D7 and D8, and converted to DC. The detection voltage is passed through the APC circuit of UHF side (Q229, Q228, Q227), then it controls the APC voltage supplied to the younger amplifier Q10 and the power module IC1 to fix the output power.

UHF:

A part of output power from low-pass filter is detected by Diodes D208 and D209, and converted to DC. The detection voltage is passed through the APC circuit of UHF side (Q229, Q228, Q227), then it controls the APC voltage supplied to the younger amplifier Q210 and the power module IC201 to fix the output power.

6) PLL Circuit

1. PLL Synthesizer Circuit

VHF and UHF bands have their own units isolatedly. The sub unit is packed in a hard shield case so as not to be influenced by the circumstances. The crystal X2: 21.25MHz is oscillated in IC501 (VHF), and the output is fed to IC601 (UHF) via buffer Q13. The reference oscillating frequency (X2) is divided inside IC501 and IC601 to gain the reference frequency of 5kHz or 6.25kHz. The comparison frequency is divided by the pulse swallow system PLL IC501 and IC601 after VCO output is amplified in Q505 (VHF) and Q604 (UHF). In the result, the PLL synthesizer which has 5, 10, 12.5, 15, 20, 25, 30 and 50kHz steps is obtained.

The reference frequency of 21.25MHz is passed through the buffer of IC501 and output from Pin1 XBO, then input to IC2 Pin1 as VHF (144MHz band) 2nd local oscillator.

*As for TE1 and TE2, reference frequency of 21.25MHz is oscillated in X901: TCXO unit and fed to IC501(VHF).

2. V-VCO Circuit

The desired frequency is oscillated directly in Colpitts oscillating circuit consisting of FET Q502. VCO control voltage is added to the varicaps D502 and D503 to tune the oscillating frequency. While receiving RXV becomes "H", and Q501 and D501 are turned ON to shift the oscillating frequency.

3. U-VCO Circuit

The desired frequency is oscillated directly in Colpitts oscillating circuit consisting of FET Q601. VCO control voltage is added to the varicaps D602 and D603 to tune the oscillating frequency.

7) Front CPU and Peripheral Circuit

1. Microphone Key Input Circuit

PTT key:

Soon after the switch on the microphone (PTT) is turned ON, "L" level is input to CPU IC401 directly.

UP/DOWN key:

Soon after this switch is turned ON, the voltage is generated by the resistors that are connected to keys and supplied to IC401 Pin4 then A/D converted in CPU.

2. Lighting Circuit

When the power is turned ON, the voltage which is stabilized to 10.5V at Q405 and D407 is supplied to LMP401 and LMP402 to turn ON the lamp.

3. Reset and Backup Circuit

When the power is turned ON, "L" level of approximately $2\mu\text{s}$ or more is output from IC403 OUT (equipped with reset function), then "H" level is output to reset CPU IC401. When the power is turned OFF, IC405 output (BU) becomes "L" level and the transceiver goes into the backup mode. The contents of the memory is written on E2PROM IC402 in the backup mode. Then IC403 (equipped with reset function) becomes "L" level to reset the CPU.

4. Beep Sound Output Circuit

The square pulse is output from CPU IC401 Pin23 (BEEP), then it is integrated by CR and input to AF amplifier without passing through Volume VR.

8) Cross Band Repeater Circuit (T, TE1, TE2)

When the Squelch of VHF side is opened in the Cross Band Repeater mode, the AF signal ROV (VHF) is unmuted and amplified by IC203. The amplified modulation signal is added to modulation varicap of UHF VCO and transmitted from UHF side. When the Squelch of UHF side is opened in the Cross Band Repeater mode, the AF signal ROU (UHF) is unmuted and amplified by IC203. The amplified modulation signal is added to modulation varicap of VHF VCO and transmitted from VHF side.

9) Tone Burst Output Circuit

When Down key is pressed while holding the PTT key down, the square pulse is output from CPU IC401 Pin14 (B1750). It is amplified by IC203 after being integrated by CR. The amplified signal is added to each VCO modulation varicap to output.

10) CTCSS Tone Encoder Circuit

The mimic sine wave is output from IC401 Pin11. It is integrated by CR, and converted to analogue wave to obtain 50 waves within 67.0~254.1. The tone is added to VCO to output.

11) CTCSS Tone Decoder Circuit (EJ-24U)

In IC1(VHF) or IC2 (UHF), a kind of tone frequency is settled by the serial data selected from 50 kinds of frequencies within 67.0~254.1Hz . While receiving the voice and tone signals input from RAV (VHF) or RAU (UHF) are supplied to Pin1, and tone signal only is selected at the low-pass filter in IC. When the signal is accordance with the tone frequency which is settled by the serial data, "L" level is output to TDV (VHF) or TDU (UHF) terminal. The "L" level signal is input to IC401, Pin32 and Pin33, then the squelch is opened. When the tone signal is not accordance with the settled frequency, "H" level is output to the TDV (VHF) or TDU (UHF) terminal. The "H" level signal is input to IC401, Pin32 and Pin33, then the squelch is closed.

12) 9600bps Packet Circuit

In the 9600 packet mode, PTT is provided through the UART terminal of JK1 to IC401 Pin22, then it is transmitted in "L" level. The modulation signal from TNC is provided through 9600 PKT terminal of JK2. It is amplified and limited in Q29, unmuted in Q26 and Q27, and the VCO is modulated, then transmitted. The detection output of IF IC2 or IC202 is input to the signal switch IC4 via butter Q23 or Q235. The input V/U signal switches the input signal of IC4 according to the signal from CPU IC401 Pin33. Then the MAIN band signal is output from Pin1 to JK2.

13) Clone Circuit

In the Clone mode, the data which is output from IC401 Pin21 of Master unit is fed to the IC401 Pin22 of the Slave unit through the UART terminal JK1 and connecting cable.

14) CPU I/O Port


No.	Pin Name	Function	I/O	Logic	Description
1	C1	C1	-	-	NC
2	VL1	V1	-	-	LCD Power supply
3	P67/AN7	V/U	I	A/D	Key input (VHF/UHF/TOT key switch)
4	P66/AN6	UP/DN	I	A/D	Key input (UP/DOWN/CALL key switch)
5	P65/AN5	SMU	I	A/D	UHF side S meter voltage input
6	P64/AN4	SQU	I	A/D	UHF side SQ noise voltage input
7	P63/SCLK22/AN3	BP1	I	A/D	Destination setting (T=5V, E=3.2V)
8	P62SCLK21/AN2	BP2	I	A/D	Extension specification
9	P61/SOUT2/AN1	SQV	I	A/D	VHF side SQ noise voltage input
10	P60/SIN2/AN0	SMV	I	A/D	VHF side S meter voltage input
11	P57/ADT/DA2	TONE	O	D/A	CTCSS tone output (50 waves)
12	P56/DA1	MMUT	O	H	Microphone mute OFF control output (TX="H")
13	P55/CNTR1	SDU	O	H	UHF Squelch signal output (When squelch is open = "H")
14	P54/CNTR0	B1750	I/O	A/D/H	Extension specification (when PSW is ON)/ Tone burst output
15	P53/RTP1	DATU	O	Pulse	UHF side PLL data output
16	P52/RTP0	CKU	O	Pulse	UHF side PLL clock output
17	P51/PWM1	STPU	O	Pulse	UHF side PLL reset output
18	P50/PWM0	PTT	I	L	Key input (PTT)
19	P47/SROY1	MUTU	O	H	UHF side AF signal mute control output ("H" = Mute is ON)
20	P46/SCLK1	XMUT	O	L	AF unmute output in cross band repeater mode (XBR = "L")
21	P45/TXD	TXD	O	Pulse	Clone data output
22	P44/RXD	RXD	I	Pulse	Clone data input (9600 packet = PTT input "L" = TX)
23	P43/\$/TOUT	BEEP	O	H	Beep sound output
24	P42/INT2	ENC2	I	L	Rotary encoder B input
25	P41/INT1	ENC1	I	L	Rotary encoder A input
26	P40	UL	I	L	PLL unlock input (L = unlock)
27	P77	TP	I	H	Trunking mode input (H = Trunking mode)
28	P76	MONI	I/O	L	Key input (MONITOR) / 9600 mode (PTT ON = "L")
29	P75	MHZ	I	L	Key input (MHz)
30	P74	V/M	I	L	Key input (VFO/MR switch)
31	P73	FUNC	I	L	key input (FUNC)
32	P72	TDV	I	L	VHF CTCSS tone detection (when the tone is detected = "L")
33	P71	TDU	I/O	L/H	UHF CTCSS tone detection/RX switch in 9600 mode (VHF=L)
34	P70/INT0	BU	I	L	Backup signal input ("L"=Backup)
35	RESET	RES	I	L	Reset signal input ("L"=Reset)
36	Xcin	XC1	-	-	NC
37	Xcout	XC0	-	-	NC
38	Xin	XIN	I	-	CPU clock input (4.1943MHz)
39	Xout	XOUT	O	-	CPU clock output (4.1943MHz)

No.	Pin Name	Function	I/O	Logic	Description
40	Vss	GND	-	-	GND
41	P27	SDV	O	H	VHF squelch signal output (when squelch is open = "H")
42	P26	MUTV	-	-	VHF AF signal mute control output (H=Mute is ON)
43	P25	STPV	O	Pulse	VHF PLL reset output
44	P24	DATV	O	Pulse	VHF PLL/CTCSS data output
45	P23	CKV	O	Pulse	VHF PLL/CTCSS clock output
46	P22	SCL	O	Pulse	EEPROM clock output
47	P21	SDA	I/O	Pulse	EEPROM data input/output
48	P20	LOW	O	H	Transmitting output switch ("H"=Low output)
49	P17	STB2	O	Pulse	CTCSS UHF strobe signal output
50	P16	TID	I/O	Pulse	CTCSS board detection/CTCSS VHF strobe signal output
51	P15/SEG39	SEG39	O	H	Segment output for LCD
↓	↓	↓	↓	↓	↓
90	SEG0	SEG0	O	H	Segment output for LCD
91	Vcc	VCC	-	-	5V Power supply
92	Vref	AVCC	-	-	Reference power supply for A/D conversion
93	AVss	GND	-	-	GND
94	COM3	COM3	-	-	NC
95	COM2	COM2	O	-	Common output 2 for LCD
96	COM1	COM1	O	-	Common output 1 for LCD
97	COM0	COM0	O	-	Common output 0 for LCD
98	VL3	V3	-	-	Power supply for LCD
99	VL2	V2	-	-	Power supply for LCD
100	C2	C2	-	-	NC


SEMICONDUCTOR DATA

1) AK2341 (XA0239) EJ24u (option) CTCSS Encoder/Decoder


Pin No.	Pin Name	I/O	Function
1	RXIN	I	RX Signal Input
2	RXINO	O	AMP2 Output
3	TXINO	O	AMP1 Output
4	TXIN	I	TX Audio Input
5	RXOUT	O	RX Audio Output
6	TXOUT	O	TX Audio Output
7	VDD	-	Power Supply (1.8 ~ 5.5V)
8	XIN	I	Crystal Terminal (3.6864MHz)
9	XOUT	O	Crystal Terminal (3.6864MHz)
10	STB	I	Strobe for Serial Data
11	SDATA	I	Serial Data
12	SCLK	I	Serial Clock
13	DCS	I	DCS Input
14	DETOUT	O	Tone Detection Output (Detect: Low)
15	VSS	-	Ground
16	DREF	I	Tone Detection Level Adjust Input
17	TLINP	I	RX Tone Signal Reference Input
18	TLINN	I	RX Tone Signal Input
19	TLINO	O	AMP3 Output
20	RXTONE	O	RX Tone Signal Output
21	TXTONE	O	TX Tone Signal Output
22	AGNDIN	I	Analog Ground Input
23	AGND	O	Analog Ground Output
24	BIAS	I	Bias Input

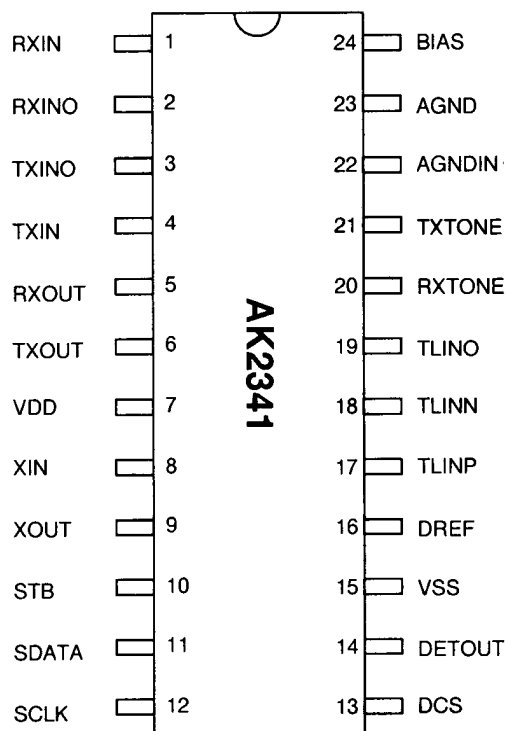

Block Diagram

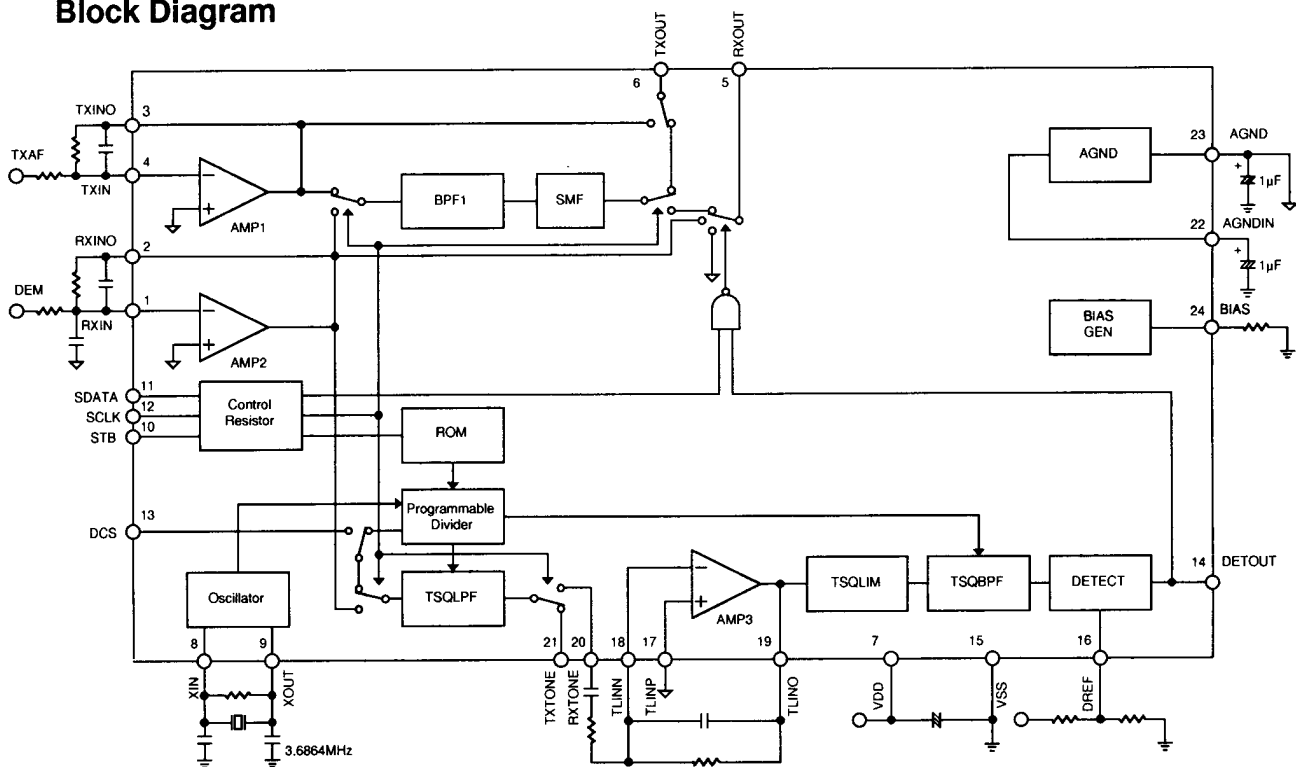



2) AN78L05M (XA0238)
5V Voltage Regulator




AN78L05M

3) AN8010M (XA0119)
Voltage Regulator


Test Circuit

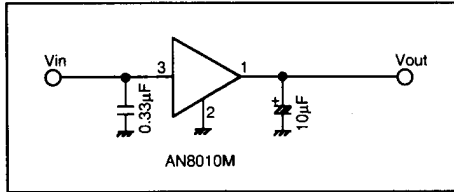

Block Diagram

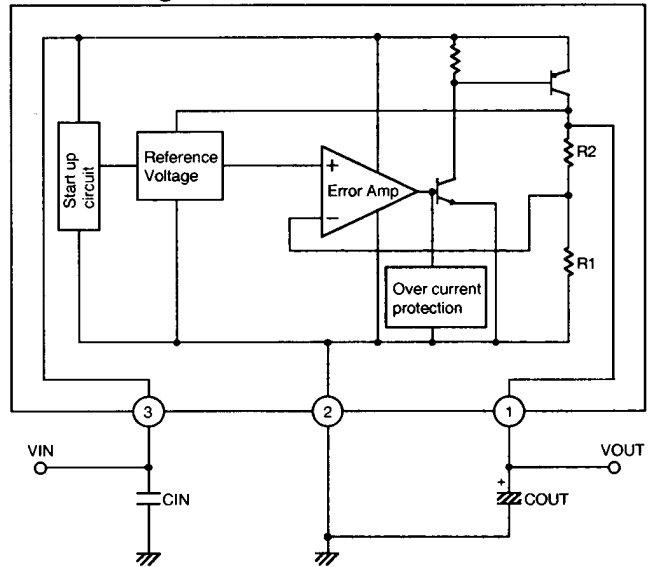



4) AT24C16N-10SI-2.7 (XA0368)
16K bits CMOS Serial EEPROM

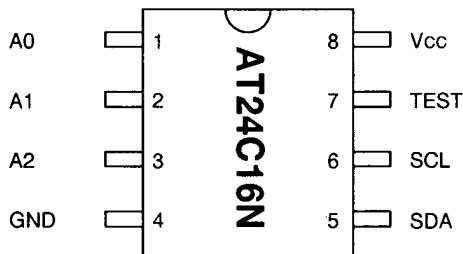


Pin Name	Function
A0 to A2	Address inputs
SDA	Serial Data
SCL	Serial Clock
Test	Test Input (GND or Vcc)
NC	No connection

5) LA4425A (XA0410)
5W Audio Power Amplifiers

Test Circuit

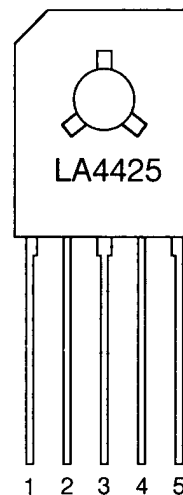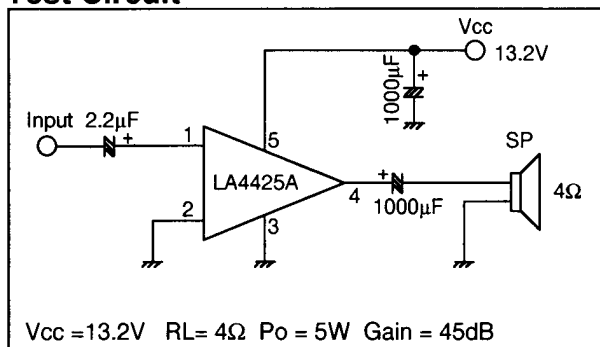


6) M64076GP (XA0352) Dual PLL Synthesizer

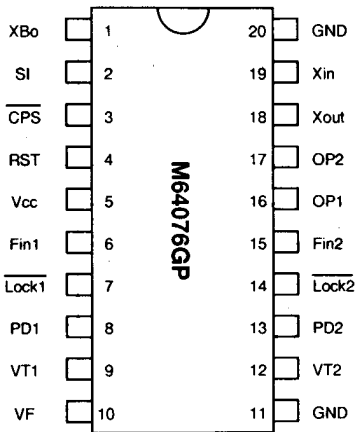


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Power supply voltage	Vcc	Fin=80~520MHz Vin=-10dBm	2.7	-	5.5	V
LPF supply voltage	VF		-	9	12	V
Local oscillator input level	Vin	Fin=80~520MHz Vcc=2.7~5.5V	-20	-	-4	dBm
Local oscillator input frequency	Fin	Vin=-20~-4dBm Vcc=2.7~5.5V	80	-	520	MHz
Xin input level	Vxin	Vcc=2.7~5.5V Fxin=10~25MHz Sine wave	0.4	-	1.4	Vp-p
Xin input frequency	Fxin	Vcc=2.7~5.5V Vxin=0.4~1.4Vp-p	10	-	25	MHz

Equivalent Circuit

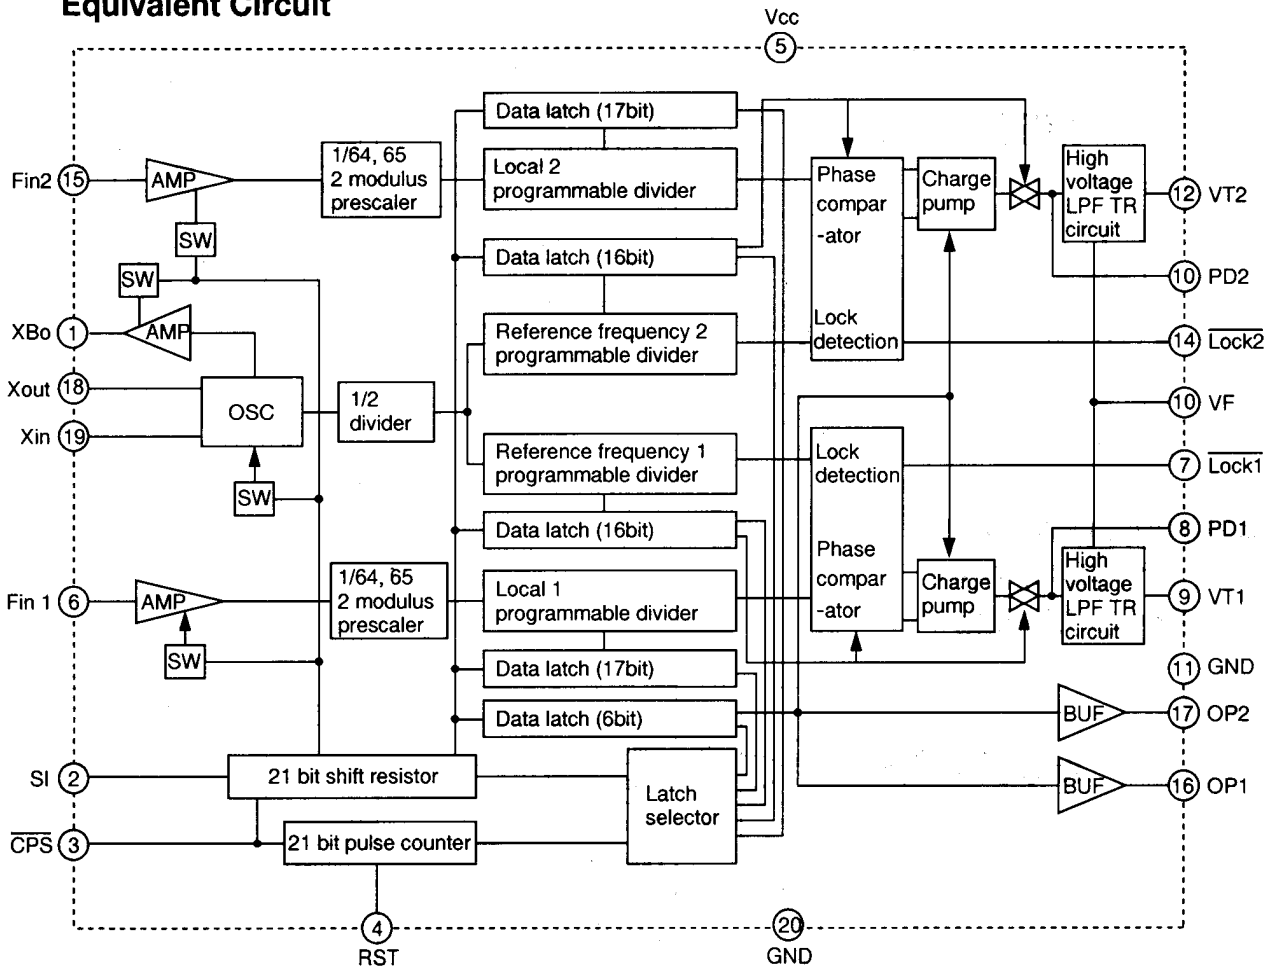


**7) M5778LR (XA0447)
M57788MR (XA0313)
M57788HR (XA0448)**
UHF FM 35W RF Power Module

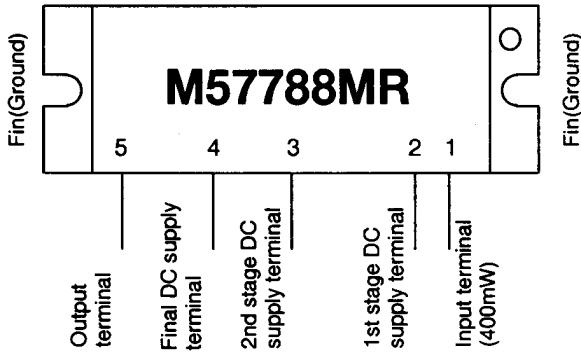

Ratings	Symbol	Ratings	Unit
Supply voltage	Vcc	17.0	V
Total current	Icc	12	A
Input power	Pin	0.8	W
Output power	Po	50	W
Operation case temperature	Tc(op)	-30~+110	°C
Storage temperature	Tstg	-40~+110	°C

f=430~450MHz, Vcc1 ≤ 13.5V, Zg=Zl=50Ω


8) M67746 (XA0412)
144 ~ 148MHz 60W
RF Power Module

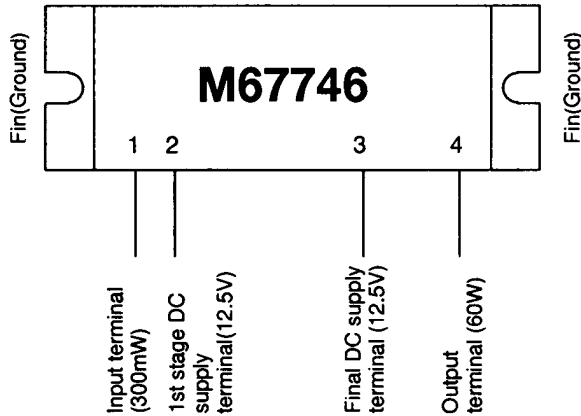

Ratings	Symbol	Ratings	Unit
Supply voltage	Vcc	17	V
Total current	Icc	20	A
Input power	Pin(max)	600	mW
Output power	Po(max)	70	W
Operation case temperature	Tc(op)	-30 to +110	°C
Storage temperature	Tstg	-40 to +110	°C

Zg=Zl=50Ω

9) M68702H (XA0444)
150 ~ 175MHz 60W
RF Power Module


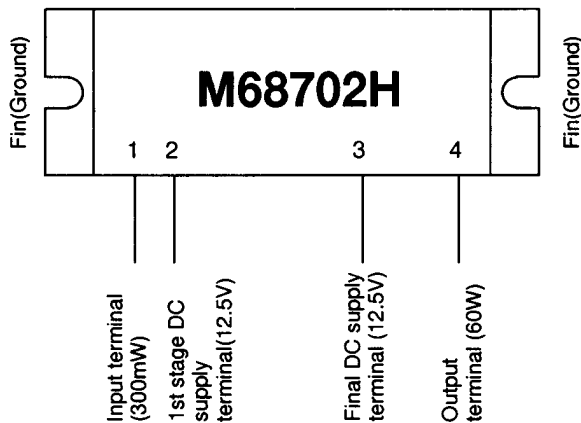


Ratings	Symbol	Ratings	Unit
Supply voltage	Vcc	17	V
Total current	Icc	20	A
Input power	Pin(max)	600	mW
Output power	Po(max)	75	W
Operation case temperature	Tc(op)	-30 to +110	°C
Storage temperature	Tstg	-40 to +110	°C

Zg=Zl=50Ω

10) MC3372VM (XA0343) Low Power FM IF

Equivalent Circuit

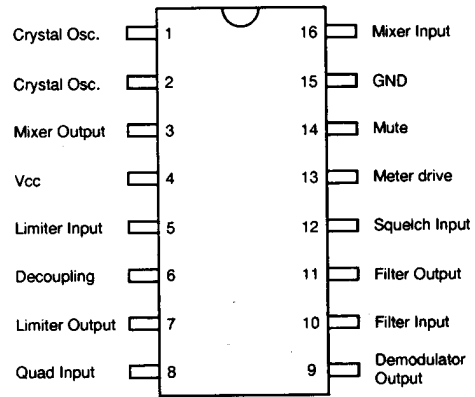
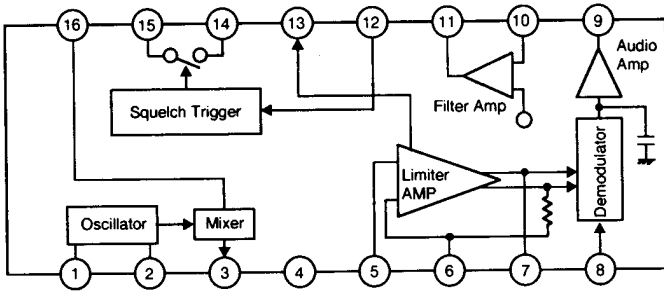


Ta=25°C


Parameter	Pin No.	Symbol	Ratings	Unit
Max. supply voltage	4	Vcc	2.4~9.0	Vdc
RF input voltage	16	Vrf	0.005~10	mVrms
RF input frequency	16	Frf	0.1~100	MHz
Oscillator input voltage	1	Vlocal	80~400	mVrms
IF frequency	-	Fif	455	kHz
Limiter amplifier input voltage	5	Vif	0~400	mVrms
Filter amplifier input voltage	10	Vfa	0.1~300	mVrms
Squelch input voltage	12	Vsq	0 or 2	Vdc
Mute sink current	14	Isq	0.1~30	mA
Temperature range	-	TA	-30~+75	°C

11) MC7808CT (XA0082) 8V Voltage Regulator

Test Circuit

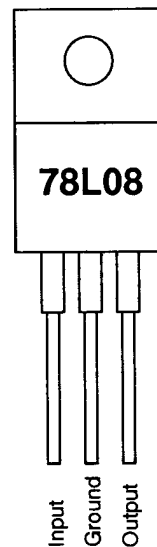
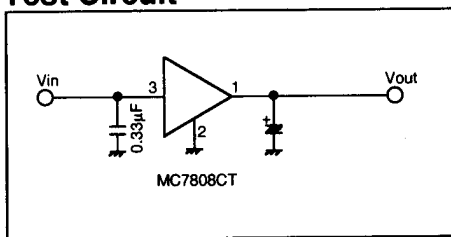


12) NJM4558 (XA0097)
Operational Amplifiers

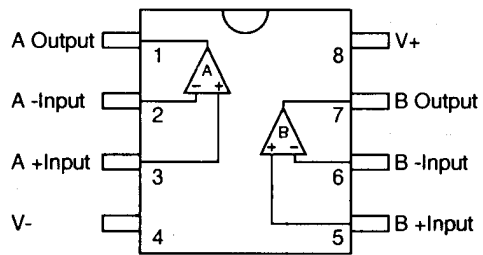

13) RH5VA60AA (XA0315)
C-MOS Voltage Detector



Equivalent Circuit

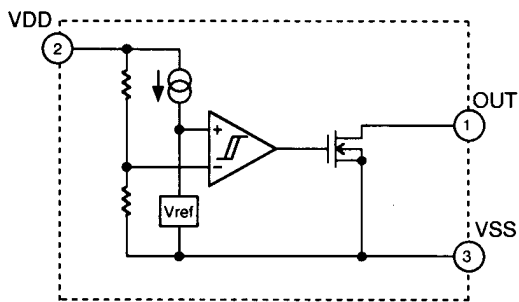

RH5VA60AA

14) RN5VL25AA-T1 (XA0309)
C-MOS Voltage Detector

Equivalent Circuit

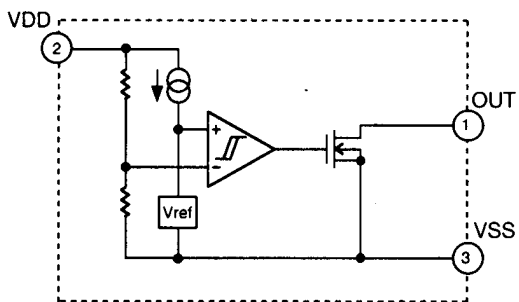


RL5VL25AA

15) TC4W53FU (XA0348) Multiplexer/Demultiplexer

Function Table

Control input		ON channel
INH	A	
L	L	ch 0
L	H	ch 1
H	*	NONE

* Don't Care

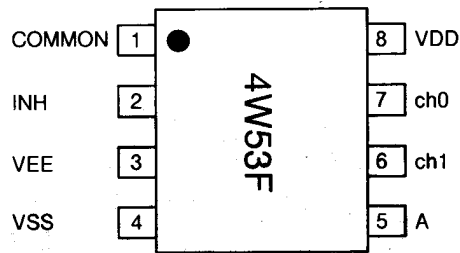


16) Transistor, Diode and LED Outline Drawings

Top View

1SS355 XD0254	1SS356 XD0272	1SV214 XD0131	1SV215 XD0132	1SV237 XD0141	1SV262 XD0300	1SV268 XD0301	DA204U XD0130
DAN202U XD0230	DAN235U XD0246	DTZ5.1A XD0136	DTZ11B XD0187	DSA3AI XD0274	MA729 XD0291	MA742 XD0250	MA8110H XD0255
MI407 XD0013	RN731V XD0257	UDZ3.0B XD0304	LT1EP53A XL0039	2SK1577 XE0022	2SK508 XE0010	2SK880GR XE0021	3SK131V12 XE0028
3SK177 XE0024	3SK184S XE0013	2SA1162Y XT0017	2SA1576 XT0094	2SB1132 XT0061	2SB1292 XT0112	2SB1302 XT0126	2SC2412K XT0037
2SC2873 XT0113	2SC2954 XT0084	2SC3357 XT0048	2SC4081 XT0095	2SC4215 XT0124	2SC4245 XT0125	2SC5226 XT0146	DTC363EK XU0160
FMC2 XU0028	UN5112 XU0174	UN5114 XU0179	UN5211 XU0061	UN5213 XU0180	XN111M XU0046	XN1213 XU0054	XP1215 XU0178


17) LCD Connection

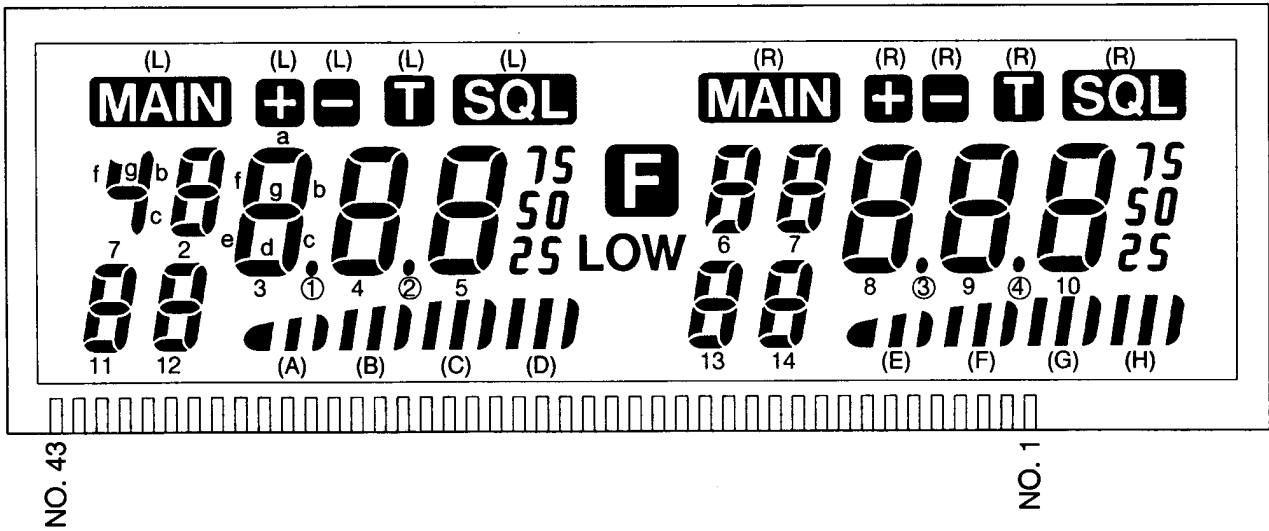


No.	COM.3	COM.2	COM.1	No.	COM.3	COM.2	COM.1
1	COM.3			26	5c	5b	(C) III
2		COM.2		27	5g	5a	5d
3			COM.1	28	5e	5f	② .
4	(R) SQL	(R) T	(H) III	29	4c	4b	(B) III
5	(R) 50	(R) 75	(R) 25	30	4g	4a	4d
6	10c	10b	(G) III	31	4e	4f	① .
7	10g	10a	10d	32	3c	3b	(A) II
8	10e	10f	④ .	33	3g	3a	3d
9	9c	9b	(F) III	34	3e	3f	(L) SQL
10	9g	9a	9d	35	2c	2b	(L) T
11	9e	9f	③ .	36	2g	2a	2d
12	8c	8b	(E) II	37	2e	2f	(L) □
13	8g	8a	8d	38	12c	12b	(L) ⊕
14	8e	8f	(R) □	39	12g	12a	12d
15	7c	7b	(R) ⊕	40	12e	12f	1bc
16	7g	7a	7d	41	11c	11b	1fg
17	7e	7f	7a	42	11g	11a	11d
18	14c	14b	6bcg	43	11e	11f	(L) MAIN
19	14g	14a	14d				
20	14e	14f	6e				
21	13c	13b	6f				
22	13g	13a	13d				
23	13e	13f	(R) MAIN				
24	LOW	F	(D) III				
25	(L) 50	(L) 75	(L) 25				

EXPLODED VIEW


1) LCD Assembly

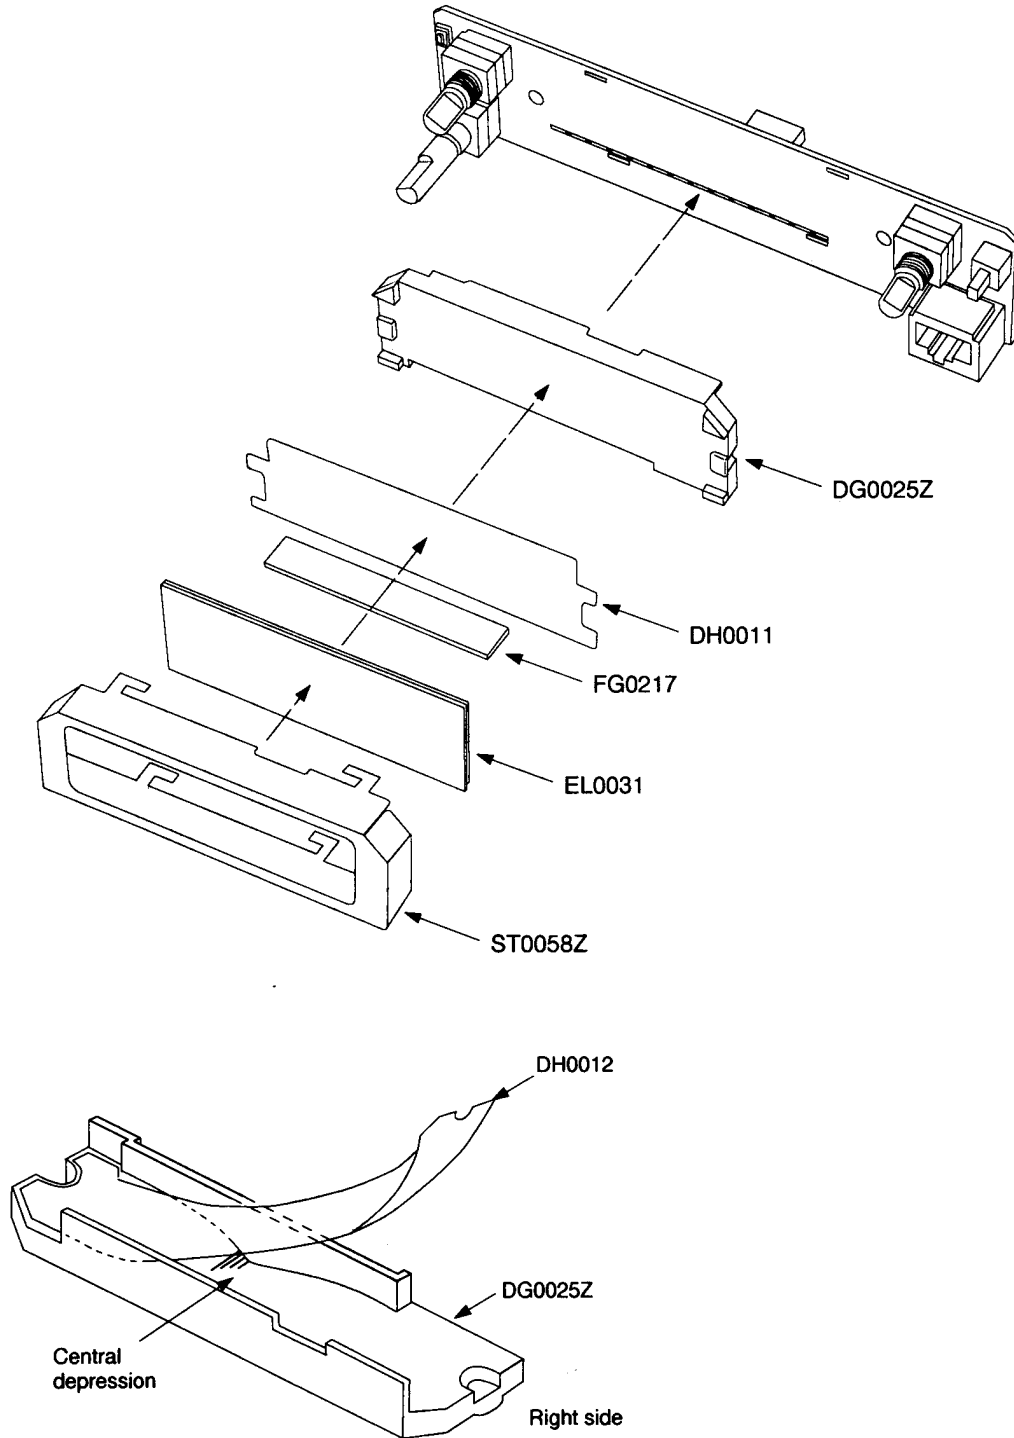

2) VHF Unit Assembly

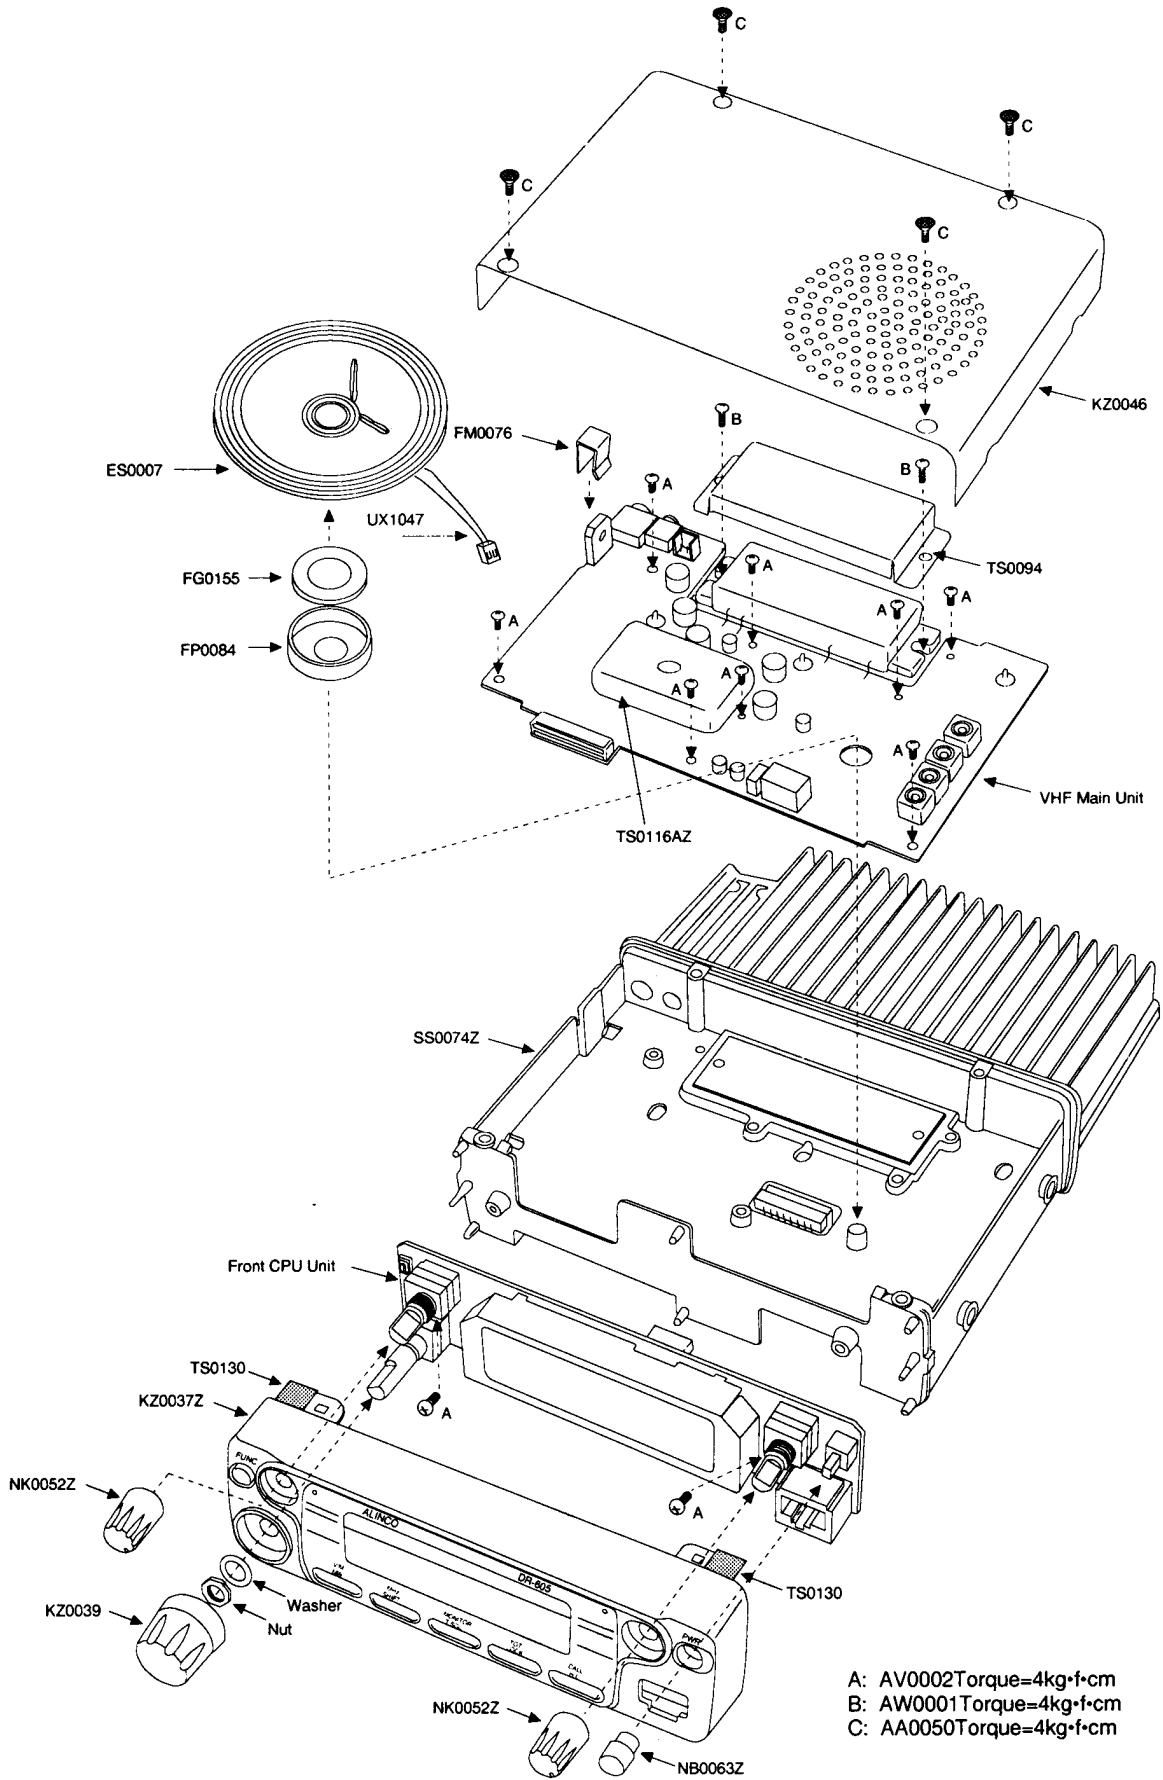

3) UHF Unit Assembly

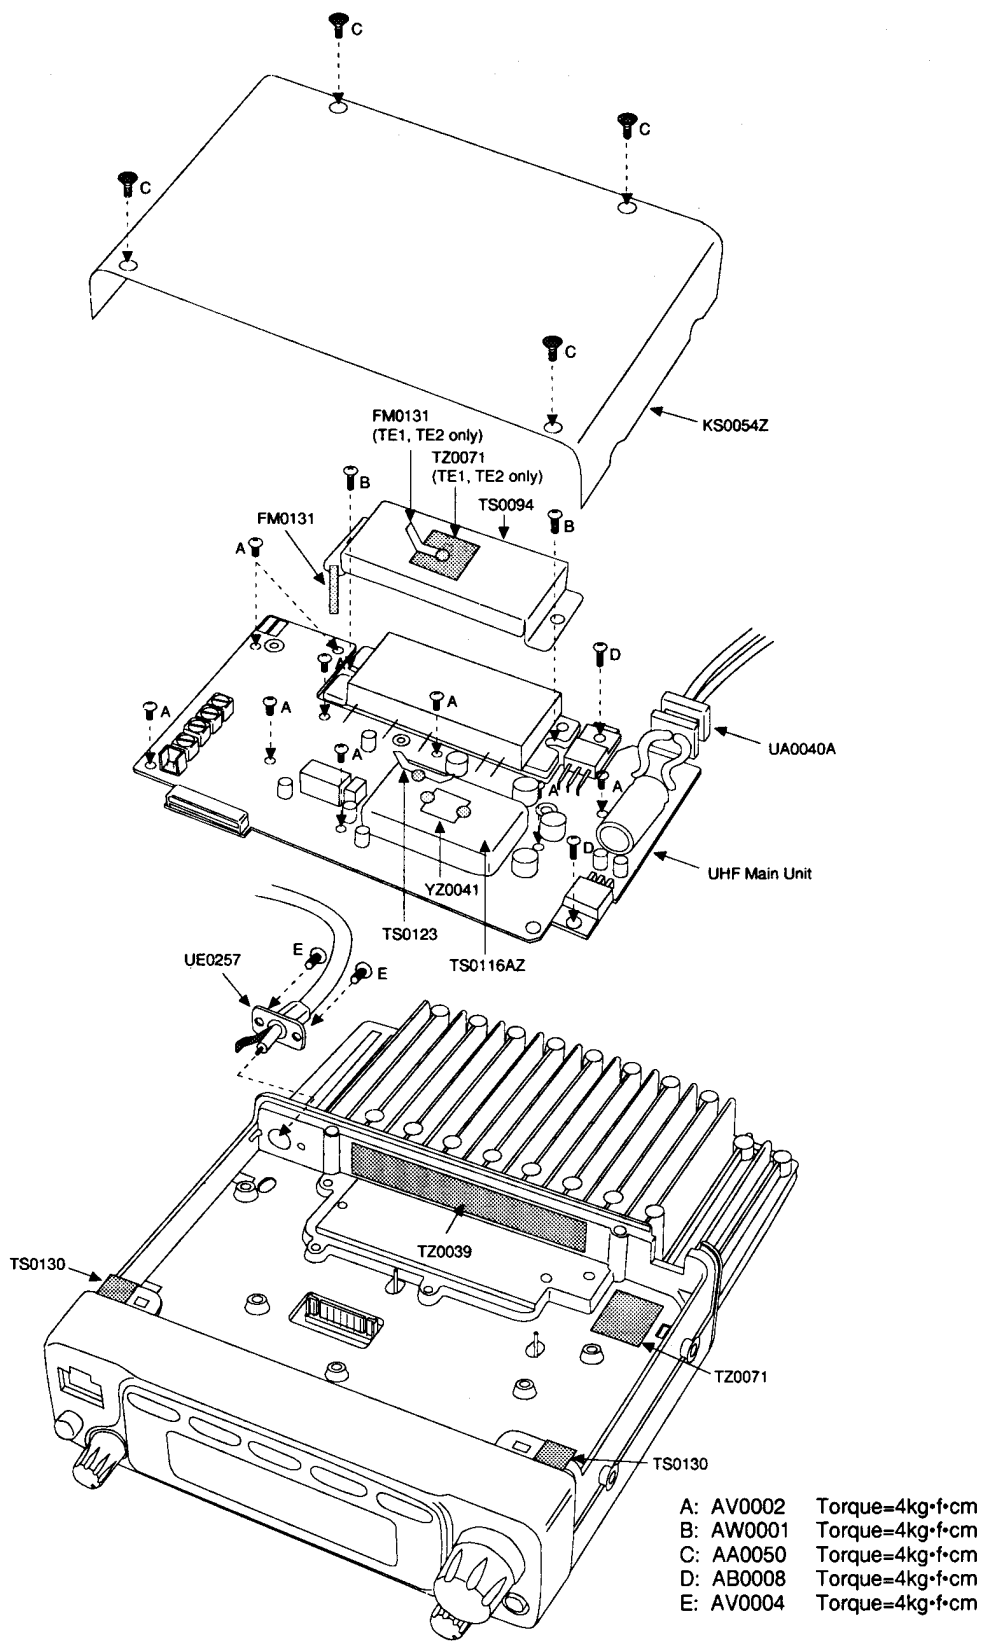

PARTS LIST

VHF MAIN Unit

VHF MAIN Unit

Ref. No.	Parts No.	Description	Parts Name	Ver.
C1	CU9018	Chip C.	C3216JBI103MT-N	
C2	CE0312	Chip C.	ECEV1CA100R	
C3	CU3044	Chip C.	C1608JBI1H452KT-A	
C4	CU3044	Chip C.	C1608JBI1H452KT-A	
C5	CU3035	Chip C.	C2012BI103MT-N	
C6	CE0312	Chip C.	ECEV1CA100R	
C7	CU3047	Chip C.	C1608JBI1H103KT-A	
C8	CU3034	Chip C.	C2012X7RI-E33K	
C9	CU3041	Chip C.	C1608JBI1H32KT-A	
C10	CU3049	Chip C.	C1608JBI1E153KT-A	
C11	CU8042	Chip C.	C2012BI104KT-A	
C12	CU9018	Chip C.	C3216JBI103MT-N	
C13	CU3035	Chip C.	C1608JBI1H103KT-A	
C14	CU3065	Chip C.	TMCSA1D864MTR	
C15	CU8042	Chip C.	C2012BI104KT-A	
C16	CU3047	Chip C.	C1608JBI1H103KT-A	
C17	CU3035	Chip C.	C1608JBI1H102KT-A	
C18	CU3035	Chip C.	C1608JBI1H102KT-A	
C19	CU3023	Chip C.	T1608CH1H101JT-A	
C20	CU3023	Chip C.	T1608CH1H101JT-A	
C21	CU3047	Chip C.	C1608JBI1H103KT-A	
C22	CU3051	Chip C.	C1608JBI1E22KT-A	
C23	CE0312	Chip C.	ECEV1CA100R	
C24	CU3059	Chip C.	C1608JBI1E104ZTA	
C25	CU3059	Chip C.	C1608JBI1E104ZTA	
C26	CU3023	Chip C.	T1608CH1H101JT-A	
C27	CU3059	Chip C.	C1608JBI1E104ZTA	
C28	CU3035	Chip C.	C1608JBI1H102KT-A	
C29	CU3035	Chip C.	C1608JBI1H102KT-A	
C30	CU3018	Chip C.	C1608JBI1H102KT-A	
C31	CU9047	Chip C.	C1608JBI1H102KT-A	
C32	CU3019	Chip C.	C1608CH1H47DUT-A	
C33	CU3035	Chip C.	C1608JBI1H102KT-A	
C34	CU3035	Chip C.	C1608JBI1H102KT-A	
C35	CU3015	Chip C.	C1608CH1H22DUT-A	
C36	CU3015	Chip C.	C1608CH1H22DUT-A	
C37	CU3035	Chip C.	C1608CH1H180UT-A	
C38	CU3016	Chip C.	C1608JBI1H102KT-A	
C39	CU3035	Chip C.	C1608CH1H27DUT-A	
C40	CU3035	Chip C.	C1608JBI1H102KT-A	
C41	CU0060	Chip C.	C2012CH1H47DUT-A	
C42	CU3035	Chip C.	C1608JBI1H102KT-A	
C43	CU3035	Chip C.	C1608JBI1H102KT-A	
C44	CU3015	Chip C.	C1608CH1H22DUT-A	
C45	CU3012	Chip C.	C1608CH1H12DUT-A	
C46	CU3012	Chip C.	C1608CH1H22DUT-A	
C47	CU3035	Chip C.	C1608JBI1H102KT-A	
C48	CE0315	Chip C.	ECEV1CA470P#	
C49	CE0315	Chip C.	ECEV1CA470P#	
C50	CE0312	Chip C.	C1608JBI1H102KT-A	
C51	CU3035	Chip C.	C1608JBI1H102KT-A	
C52	CE0312	Chip C.	ECEV1CA100R	

Ref. No.	Parts No.	Description	Parts Name	Ver.
C53	CU3035	Chip C.	C1608JBI1H102KT-A	
C54	CC5052	Ceramic C.	RCC05SL040L-L66AE	TE
C55	CC5050	Ceramic C.	RCC05SL020L-L66AE	1.2
C56	CU3035	Chip C.	C1608JBI1H102KT-A	
C57	CU3035	Chip C.	C1608JBI1H102KT-A	
C58	CC5050	Ceramic C.	DD05-979SL150J500	
C59	CC5025	Ceramic C.	HM605JVB 102K	
C60	CC5067	Ceramic C.	RCC05SL330L-L46AE	TE
C61	CU3002	Ceramic C.	RCC05SL1H1010CT-A	1.2
C62	CC5059	Ceramic C.	RCC05SL470L-L46AU	TE
C63	CC5055	Ceramic C.	RCC05SL270L-L46AE	1.2
C64	CU3002	Chip C.	C1608CH1H1010CT-A	
C65	CC5067	Ceramic C.	RCC05SL330L-L46AE	
C66	CU3003	Chip C.	C1608CH1H200CT-A	
C67	CU3035	Chip C.	C1608JBI1H102KT-A	
C68	CU3003	Chip C.	C1608CH1H200CT-A	
C69	CU3035	Chip C.	C1608JBI1H102KT-A	
C70	CU3035	Chip C.	C1608JBI1H102KT-A	
C71	CU3035	Chip C.	C1608JBI1H102KT-A	
C72	CU3035	Chip C.	C1608JBI1H102KT-A	
C73	CU3035	Chip C.	C1608JBI1H102KT-A	
C74	CU3035	Chip C.	C1608JBI1H102KT-A	
C75	CU3023	Chip C.	C1608CH1H101JT-A	TE
C76	CU3021	Chip C.	C1608CH1H101JT-A	1.2
C77	CU3035	Chip C.	C1608JBI1H102KT-A	
C78	CU3019	Chip C.	C1608CH1H47DUT-A	
C79	CU3002	Chip C.	C1608CH1H1010CT-A	
C80	CU3019	Chip C.	C1608CH1H47DUT-A	
C81	CU3002	Chip C.	C1608CH1H1010CT-A	
C82	CU3019	Chip C.	C1608CH1H47DUT-A	
C83	CU3017	Chip C.	C1608CH1H330UT-A	TE
C84	CU3035	Chip C.	C1608JBI1H102KT-A	
C85	CU3047	Chip C.	C1608JBI1H102KT-A	
C86	CU3035	Chip C.	C1608JBI1H102KT-A	
C87	CU3047	Chip C.	C1608JBI1H102KT-A	
C88	CU3015	Chip C.	C1608CH1H22DUT-A	
C89	CU3009	Chip C.	C1608CH1H090CT-A	
C90	CS9237	Chip Tantal	TMCM1A475MTR	
C91	CU3035	Chip C.	C1608JBI1H102KT-A	
C93	CU3035	Chip C.	C1608JBI1H102KT-A	
C94	CS9236	Chip Tantal	TMCM1A475MTR	
C95	CU3035	Chip C.	C1608JBI1H102KT-A	
C96	CE0315	Chip C.	ECEV1CA470P#	
C97	CU3035	Chip C.	C1608JBI1H102KT-A	
C98	CU3035	Chip C.	C1608JBI1H102KT-A	
C99	CU3035	Chip C.	C1608JBI1H102KT-A	
C100	CU3035	Chip C.	C1608JBI1H102KT-A	
C101	CU3035	Chip C.	C1608JBI1H102KT-A	
C102	CU3035	Chip C.	C1608JBI1H102KT-A	
C103	CU3035	Chip C.	C1608JBI1H102KT-A	
C104	CU3035	Chip C.	C1608JBI1H102KT-A	
C108	CU3047	Chip C.	C1608JBI1H103KT-A	
C109	CU3047	Chip C.	C1608JBI1H103KT-A	

Ref. No.	Parts No.	Description	Parts Name	Ver.
C110	CE0374	Electrolytic C	16V 100BS	
C111	CU3019	Chip C.	C1608CH1H47DUT-A	TE
C112	CU3035	Chip C.	C1608JBI1H102KT-A	1.2
C113	CU3016	Chip C.	C1608CH1H27DUT-A	TE
C114	CU3012	Chip C.	C1608CH1H12DUT-A	TE
C115	CU3009	Chip C.	C1608CH1H090CT-A	TE
C116	CU3023	Chip C.	C1608CH1H101JT-A	TE
C117	CU3018	Chip C.	C1608JBI1H102KT-A	TE
C118	CU3035	Chip C.	C1608JBI1H102KT-A	
C119	CU3035	Chip C.	C1608JBI1H102KT-A	
C120	CU3047	Chip C.	C1608JBI1H103KT-A	
C121	CU9018	Chip C.	C3216JBI103MT-N	
C122	CU3035	Chip C.	C1608JBI1H102KT-A	1.2
C125	CS9237	Chip Tantal	TMCM1A475MTR	
C126	CU3047	Chip C.	C1608JBI1H103KT-A	
C127	CE0342	Electrolytic C	18MV 470HC TS	
C128	CU8042	Chip C.	C2012BI104KT-A	
C129	CU3059	Chip C.	C1608JF1E104ZTA	
C130	CU3035	Chip C.	C1608JBI1H102KT-A	
C131	CU3035	Chip C.	C1608JBI1H102KT-A	
C132	CU3047	Chip C.	C1608JBI1H103KT-A	
C133	CS9237	Chip Tantal	TMCM1A475MTR	
C134	CU3035	Chip C.	C1608JBI1H102KT-A	
C135	CU3035	Chip C.	C1608JBI1H102KT-A	
C136	CU3035	Chip C.	C1608JBI1H102KT-A	
C137	CU3035	Chip C.	C1608JBI1H102KT-A	
C138	CU3035	Chip C.	C1608JBI1H102KT-A	
C139	CU3035	Chip C.	C1608JBI1H102KT-A	
C140	CE0374	Electrolytic C	16V 100BS	
C142	CE0374	Electrolytic C	16V 100BS	
C143	CU3035	Chip C.	C1608JBI1H102KT-A	
C144	CU3035	Chip C.	C1608JBI1H102KT-A	
C145	CS9237	Chip Tantal	TMCM1A475MTR	
C146	CS9237	Chip Tantal	TMCM1A475MTR	
C147	CS9237	Chip Tantal	TMCM1A475MTR	
C148	CU9018	Chip C.	C3216JBI103MT-N	
C149	CU3035	Chip C.	C1608JBI1H102KT-A	
C150	CU3035	Chip C.	C1608JBI1H102KT-A	TE
C151	CU3009	Chip C.	C1608CH1H090CT-A	
C152	CU3047	Chip C.	C1608JBI1H102KT-A	1.2
C153	CU3047	Chip C.	C1608JBI1H102KT-A	1.2
C154	CU8034	Chip C.	C2012X7RI-E33KTR	1.2
C155	CS9049	Chip Tantal	TMCSA1C185MTR	1.2
C156	CU3035	Chip C.	C1608JBI1H102KT-A	
C157	CU8042	Chip C.	C2012BI104KT-A	1.2
C158	CU3017	Chip C.	C1608CH1H330UT-A	1.2
C159	CE0293	Connector	17PS-JE	
C160	UEE043	Connector	PI22A02M	
C161	UEE027	Connector	00 8283 0912 00 000	
C162	UEE167	Connector	B6B-ZR	
C163	UEE080	Short Pin	18MM	
C164	UEE080	Short Pin	18MM	
C165	UEE080	Short Pin	18MM	

Ref. No.	Parts No.	Description	Parts Name	Ver.
CN7	UEE080	Short Pin	18MM	
D1	XD0136	Diode	D1Z5.1A TT11	
D2	XD0250	Diode	MA742-TX	
D3	XD0246	Diode	DAN255UT106	
D4	XD0254	Diode	1SS365 TE-17	
D5	XD0013	Diode	MA407	
D6	XD0301	Diode	1SV268	
D7	XD0250	Diode	MA742-TX	
D8	XD0250	Diode	MA742-TX	
D9	XD0130	Diode	DA204UT106	
D10	XD0132	Diode	1SV215 TP4	
D11	XD0132	Diode	1SV215 TP4	
D12	XD0132	Diode	1SV215 TP4	
D13	XD0132	Diode	1SV215 TP4	
D14	XD0254	Diode	1SS365 TE-17	
D21	XD0297	Diode	MA729-TX	1.2
F1	XC0021	Filter	CFW450E	
F12	XF0024	Filter	21.7MHz D21715B83	
IC1	XA0412	IC	M67746	TE
IC2	XA0444	IC	M68702H	1.2
IC3	XA0410	IC	MC3372VM-EL	
IC4	XA0348	IC	LA4425A	
JK1	UJ0019	Connector	HSJ1493-01-010	
JK2	UJ0022	Connector	HSJ1192-01-540	
JK5	MGCL02AA	Wire	#30G02-020-02	1.2

Note: Version1=TE1, Version2=TE2

Note: Version1=TE1, Version2=TE2

VHF MAIN UNIT

Ref. No.	Parts No.	Description	Parts Name	Ver.
Q1	XT0095	Transistor	2SC4081T106R	
Q2	XT0095	Transistor	2SC4081T106R	
Q3	XT0095	Transistor	2SC4081T106R	
Q4	XU0160	Transistor	DTCS63EKT146	
Q5	XU0174	Transistor	UN5112-TX	
Q6	XT0095	Transistor	2SC4081T106R	
Q7	XT0124	Transistor	2SC4215-VTE85L	
Q8	XT0124	Transistor	2SC4215-VTE85L	
Q9	XT0048	Transistor	2SC3357T1 RE	
Q10	XT0084	Transistor	2SC2954-T1	
Q11	XE0013	FET	3SK184S-TX	
Q12	XE0013	FET	3SK184S-TX	
Q13	XT0095	Transistor	2SC4081T106R	
Q14	XE0021	FET	2SK890GRT1E85L	
Q16	XT0017	Transistor	2SA1182VTE85	
Q17	XU0061	Transistor	UN5211-TX	
Q18	XT0061	Transistor	2SB1132T100Q	
Q19	XU0061	Transistor	UN5211-TX	
Q20	XU0180	Transistor	UN5213	
Q21	XU0061	Transistor	UN5211-TX	
Q22	XU0160	Transistor	DTCS63EKT146	
Q23	XT0095	Transistor	2SC4081T106R	
Q26	XT0095	Transistor	DTCS63EKT146	
Q27	XU0179	Transistor	UN5114	
Q28	XU0180	Transistor	UN5213	
Q29	XT0095	Transistor	2SC4081T106R	
Q30	XT0146	Transistor	2SC3226-4TL	

Ref. No.	Parts No.	Description	Parts Name	Ver.
R1	RK3038	Chp R.	ERJ3G5VJ102V	
R2	RK3042	Chp R.	ERJ3G5VJ222V	
R3	RK3058	Chp R.	ERJ3G5VJ473V	
R4	RK3071	Chp R.	ERJ3G5VJ564V	
R5	RK3034	Chp R.	ERJ3G5VJ471V	
R6	RK3026	Chp R.	ERJ3G5VJ101V	
R7	RK3042	Chp R.	ERJ3G5VJ222V	
R8	RK3054	Chp R.	ERJ3G5VJ223V	
R9	RK3050	Chp R.	ERJ3G5VJ103V	
R10	RK3032	Chp R.	ERJ3G5VJ331V	
R11	RK3071	Chp R.	ERJ3G5VJ564V	
R12	RK3057	Chp R.	ERJ3G5VJ393V	
R13	RK3054	Chp R.	ERJ3G5VJ223V	
R14	RK3059	Chp R.	ERJ3G5VJ563V	
R15	RK3041	Chp R.	ERJ3G5VJ182V	
R16	RK3041	Chp R.	ERJ3G5VJ182V	
R17	RK3058	Chp R.	ERJ3G5VJ473V	
R18	RK3030	Chp R.	ERJ3G5VJ221V	
R19	RK3046	Chp R.	ERJ3G5VJ472V	
R20	RK3038	Chp R.	ERJ3G5VJ102V	
R21	RK3050	Chp R.	ERJ3G5VJ103V	
R22	RK3056	Chp R.	ERJ3G5VJ333V	
R23	RK3038	Chp R.	ERJ3G5VJ102V	
R24	RK3038	Chp R.	ERJ3G5VJ102V	
R25	RK3043	Chp R.	ERJ3G5VJ272V	

Ref. No.	Parts No.	Description	Parts Name	Ver.
R26	RK3056	Chp R.	ERJ3G5VJ333V	
R27	RK3050	Chp R.	ERJ3G5VJ103V	
R28	RK3066	Chp R.	ERJ3G5VJ224V	
R29	RK3038	Chp R.	ERJ3G5VJ102V	
R30	RK3062	Chp R.	ERJ3G5VJ104V	
R31	RK3038	Chp R.	ERJ3G5VJ102V	
R32	RK3071	Chp R.	ERJ3G5VJ564V	
R33	RK3038	Chp R.	ERJ3G5VJ102V	
R34	RK3026	Chp R.	ERJ3G5VJ101V	
R35	RK3026	Chp R.	ERJ3G5VJ101V	
R36	RK3045	Chp R.	ERJ3G5VJ392V	
R37	RK3038	Chp R.	ERJ3G5VJ102V	
R38	RK3026	Chp R.	ERJ3G5VJ101V	
R39	RK3038	Chp R.	ERJ3G5VJ102V	
R40	RK3038	Chp R.	ERJ3G5VJ102V	
R41	RK3045	Chp R.	ERJ3G5VJ392V	
R42	RK3014	Chp R.	ERJ3G5VJ100V	
R43	RK3034	Chp R.	ERJ3G5VJ471V	
R44	RK3022	Chp R.	ERJ3G5VJ470V	
R45	RK3034	Chp R.	ERJ3G5VJ471V	
R46	RK3043	Chp R.	ERJ3G5VJ272V	
R47	RK0107	Chp R.	ERJ3G5VY0R00V	
R48	RK4026	Chp R.	ERJ3G5VJ100V	
R49	RK4018	Chp R.	ERJ-12VJ220V	
R50	RK0036	Chp R.	ERJ6GEVJ122V	
R51	RK3042	Chp R.	ERJ3G5VJ222V	
R52	RK3042	Chp R.	ERJ3G5VJ222V	
R53	RK3058	Chp R.	ERJ3G5VJ473V	
R54	RK3050	Chp R.	ERJ3G5VJ104V	
R55	R00062U	Carbon R.	ERD52173A	
R56	RK3026	Chp R.	ERJ3G5VJ101V	
R58	RK3062	Chp R.	ERJ3G5VJ104V	
R59	RK3026	Chp R.	ERJ3G5VJ101V	
R60	RK3062	Chp R.	ERJ3G5VJ104V	
R61	RK3062	Chp R.	ERJ3G5VJ104V	
R62	RK3062	Chp R.	ERJ3G5VJ104V	
R63	RK3062	Chp R.	ERJ3G5VJ133V	
R65	RK3014	Chp R.	ERJ3G5VJ100V	
R66	RK3042	Chp R.	ERJ3G5VJ222V	
R67	RK3026	Chp R.	ERJ3G5VJ101V	
R68	RK3050	Chp R.	ERJ3G5VJ103V	
R69	RK3037	Chp R.	ERJ3G5VJ821V	
R70	RK3050	Chp R.	ERJ3G5VJ103V	
R71	RK3050	Chp R.	ERJ3G5VJ103V	
R72	RK3050	Chp R.	ERJ3G5VJ103V	
R73	RK3050	Chp R.	ERJ3G5VJ103V	
R74	RK3041	Chp R.	ERJ3G5VJ182V	
R75	RK3054	Chp R.	ERJ3G5VJ223V	
R76	RK3046	Chp R.	ERJ3G5VJ472V	
R77	RK3044	Chp R.	ERJ3G5VJ332V	
R78	RK3018	Chp R.	ERJ3G5VJ220V	
R79	RK3062	Chp R.	ERJ3G5VJ104V	

Ref. No.	Parts No.	Description	Parts Name	Ver.
R81	RK3038	Chp R.	ERJ3G5VJ102V	
R82	RK3050	Chp R.	ERJ3G5VJ103V	
R83	RK3062	Chp R.	ERJ3G5VJ104V	
R84	RK3001	Chp R.	ERJ3G5V0R00V	
R84	RK3026	Chp R.	ERJ3G5VJ101V	
R86	RK3054	Chp R.	ERJ3G5VJ223V	
R87	RK3058	Chp R.	ERJ3G5VJ473V	
R88	RK3034	Chp R.	ERJ3G5VJ471V	
R89	RK3062	Chp R.	ERJ3G5VJ104V	
R92	RK3026	Chp R.	ERJ3G5VJ101V	
R93	RK3074	Chp R.	ERJ3G5VJ105V	
R94	RK3026	Chp R.	ERJ3G5VJ101V	
R95	RK3038	Chp R.	ERJ3G5VJ102V	
R96	RK3038	Chp R.	ERJ3G5VJ102V	
R97	RK3038	Chp R.	ERJ3G5VJ102V	
R98	RK3038	Chp R.	ERJ3G5VJ102V	
R99	RK0105	Chp R.	ERJ6GEVJ2R2V	
R100	RK3062	Chp R.	ERJ3G5VJ104V	
R101	RK3058	Chp R.	ERJ3G5VJ473V	
R102	RK3058	Chp R.	ERJ3G5VJ103V	
R103	RK3050	Chp R.	ERJ3G5VJ103V	
R104	RK3026	Chp R.	ERJ3G5VJ101V	
R105	RK3026	Chp R.	ERJ3G5VJ101V	
R106	RK3026	Chp R.	ERJ3G5VJ101V	
R107	RK3070	Chp R.	ERJ3G5VJ101V	
R108	RK3042	Chp R.	ERJ3G5VJ222V	
R109	RK3058	Chp R.	ERJ3G5VJ473V	
R110	RK3038	Chp R.	ERJ3G5VJ102V	
R111	RK3054	Chp R.	ERJ3G5VJ473V	
R112	RK3054	Chp R.	ERJ3G5VJ223V	
R113	RK3050	Chp R.	ERJ3G5VJ103V	
R114	RK3058	Chp R.	ERJ3G5VJ473V	
R115	RK3058	Chp R.	ERJ3G5VJ473V	
R116	RK3001	Chp R.	ERJ3G5V0R00V	
R118	RK3026	Chp R.	ERJ3G5VJ101V	
R119	RK0107	Chp R.	ERJ3G5V0R00V	
R120	RK3001	Chp R.	ERJ3G5V0R00V	
R120	RK3050	Chp R.	ERJ3G5VJ103V	
R121	RK3058	Chp R.	ERJ3G5VJ473V	
R122	RK3050	Chp R.	ERJ3G5VJ103V	
R123	RK0128	Chp R.	ERJ6GEVJ5R8V	
R124	RK0036	Chp R.	ERJ3G5VJ122V	
R125	RK3058	Chp R.	ERJ3G5VJ473V	
R126	RK3054	Chp R.	ERJ3G5VJ223V	
R127	RK3031	Chp R.	ERJ3G5VJ271V	
R128	RK3069	Chp R.	ERJ3G5VJ394V	
R129	RK3044	Chp R.	ERJ3G5VJ101V	
R130	RK3026	Chp R.	ERJ3G5VJ332V	
R131	RK3042	Chp R.	ERJ3G5VJ222V	
R132	RK3051	Chp R.	ERJ3G5VJ123V	
R133	RK3023	Chp R.	ERJ3G5VJ560V	
R133	RK3026	Chp R.	ERJ3G5VJ101V	
R134	RK3074	Chp R.	ERJ3G5VJ105V	
R135	RK3050	Chp R.	ERJ3G5VJ103V	

Ref. No.	Parts No.	Description	Parts Name	Ver.
R137	RK3018	Chp R.	ERJ3G5VJ20V	
R138	RK3046	Chp R.	ERJ3G5VJ472V	
R139	RK3050	Chp R.	ERJ3G5VJ103V	
R141	RK3054	Chp R.	ERJ3G5VJ223V	
R142	RK3048	Chp R.	ERJ3G5VJ682V	
R142	RK3054	Chp R.	ERJ3G5VJ223V	
R143	RK1998	Chp R.	MCR50JZHL2R2E	
R144	RK3042	Chp R.	ERJ3G5VJ223V	
R145	RK3054	Chp R.	ERJ3G5VJ223V	
R146	RK3057	Chp R.	ERJ3G5VJ393V	
R147	RK1107	Chp R.	ERJ6GEV0R00V	
TC1	CT10012	Trim. C.	CTZ10AW	
TH1	XS0030	Thermister	NTCCM16094LH223KC	
VR1	RH0108	Trim. Pot	EMW1VXS0B15	
VR2	RH0104	Trim. Pot	EMW1VXS0B84	
VR3	RH0106	Trim. Pot	EMW1VXS0B84	
VR4	RH0104	Trim. Pot	EMW1VXS0B84	
XK0003	CDBM450C7	Discriminator		
X2	XO0081	Crystal	38CMT 21.25MHz	
Y1	SD0034	Spring	Earth Spring DR130	
Y2	TZ0049		Silicon Dumper	

VHF MAIN UNIT

Note: Version1=TE1, Version2=TE2

Note: Version1=TE1, Version2=TE2

Ref. No.	Parts No.	Description	Parts Name	Ver.
C201	CU3047	Chip C.	C1:608JBI1H103KT-A	
C202	CU9018	Chip C.	C321:6JBI1C105MT-N	
C203	CU9018	Chip C.	C321:6JBI1C105MT-N	
C204	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C205	CU3044	Chip C.	C1:608JBI1H562KT-A	
C206	CU3044	Chip C.	C1:608JBI1H562KT-A	
C207	CU9035	Chip C.	C201:2B1E233KT-A	
C208	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C209	CU9034	Chip C.	C201:2X7R1E333K	
C210	CU3041	Chip C.	C1:608JBI1H323KT-A	
C211	CU3049	Chip C.	C1:608JBI1E153KT-A	
C212	CU9042	Chip C.	C201:2B1C104KT-A	
C213	CU3023	Chip C.	C1:608JBI1H102KT-A	
C214	CU3023	Chip C.	C1:608JBI1H101JT-A	
C215	CU3023	Chip C.	C1:608JBI1H102KT-A	
C216	CU3035	Chip C.	C1:608JBI1H103KT-A	
C217	CU3047	Chip C.	C1:608JBI1H103KT-A	
C218	CU9042	Chip C.	C201:2B1C104KT-A	
C219	CS0065	Chip Tantal	TMCSA1D884MTR	
C220	CU3047	Chip C.	C1:608JBI1H103KT-A	
C221	CU3051	Chip C.	C1:608JBI1E233KT-A	
C222	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C223	CU9059	Chip C.	C1:608JF1E104ZTA	
C224	CU3022	Chip C.	C1:608JCH1H820JT-A	
C225	CU3059	Chip C.	C1:608JF1E104ZTA	
C226	CU3059	Chip C.	C1:608JF1E104ZTA	
C227	CU3010	Chip C.	C1:608JCH1H090CT-A	
C228	CU3007	Chip C.	C1:608JCH1H090CT-A	
C229	CU3018	Chip C.	C1:608CH1H390JT-A	
C230	CU3005	Chip C.	C1:608CH1H040CT-A	
C231	CU3011	Chip C.	C1:608CH1H100CT-A	
C232	CU3035	Chip C.	C1:608JBI1H102KT-A	
C233	CU3035	Chip C.	C1:608JBI1H102KT-A	
C234	CU3035	Chip C.	C1:608JBI1H102KT-A	
C235	CU3035	Chip C.	C1:608JBI1H102KT-A	
C236	CU3004	Chip C.	C1:608JCH1H030CT-A	
C237	CU3035	Chip C.	C1:608JBI1H102KT-A	
C238	CU3015	Chip C.	C1:608CH1H220JT-A	
C239	CU3035	Chip C.	C1:608JBI1H102KT-A	
C240	CU3011	Chip C.	C1:608CH1H100CT-A	
C241	CU3035	Chip C.	C1:608JBI1H102KT-A	
C242	CU3035	Chip C.	C1:608JBI1H102KT-A	
C243	CU3035	Chip C.	C1:608JBI1H102KT-A	
C244	CU3035	Chip C.	C1:608JBI1H102KT-A	
C245	CU3035	Chip C.	C1:608JBI1H102KT-A	
C246	CU3011	Chip C.	C1:608CH1H100CT-A	
C247	CU3011	Chip C.	C1:608CH1H100CT-A	
C248	CU3004	Chip C.	C1:608CH1H030CT-A	
C249	CU3035	Chip C.	C1:608JBI1H102KT-A	
C250	CU3035	Chip C.	C1:608JBI1H102KT-A	
C251	CU3035	Chip C.	C1:608JBI1H102KT-A	
C252	CU3004	Chip C.	C1:608CH1H030CT-A	
C253	CECV1CA100R	Electrolytic C.	CECV1CA100R	

Ref. No.	Parts No.	Description	Parts Name	Ver.
C255	CU9023	Chip C.	C1:609GCH1H101JT-A	
C256	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C257	CU9031	Chip C.	C1:608JBI1H471KT-A	
C258	CU9031	Chip C.	C1:608JBI1H471KT-A	
C259	CU3051	Chip C.	RCC05S1030C-L46AE	T
C260	CCS050	Ceramic C.	RCC05S1020C-L46AE	E
C261	CCS050	Ceramic C.	RCC05S1010C-L46AE	E
C262	CU9035	Chip C.	C1:608JBI1H102KT-A	1,2
C263	CU9035	Chip C.	C1:608JBI1H102KT-A	1,2
C264	CU9002	Chip C.	RCC05S1070C-L46AE	T
C265	CU9002	Chip C.	RCC05S1070C-L46AE	T
C266	CCS058	Ceramic C.	D005:975SL1000500	TE,2
C267	CU3003	Chip C.	C1:609GCH1H020CT-A	
C268	CCS056	Ceramic C.	RCC05S1080C-L46AE	T
C269	CCS056	Ceramic C.	RCC05S1080C-L46AE	E
C270	CCS057	Ceramic C.	RCC05S1090C-L46AE	1
C271	CCS054	Ceramic C.	RCC05S1060C-L46AE	2
C272	CCS054	Ceramic C.	RCC05S1060C-L46AE	2
C273	CCS050	Ceramic C.	RCC05S150L-L46AE	1
C274	CU9004	Chip C.	C1:608JBI1H030CT-A	E
C275	CU9004	Chip C.	C1:608JBI1H030CT-A	E
C276	CU3035	Chip C.	C1:608JBI1H102KT-A	
C277	CU3035	Chip C.	C1:608JBI1H102KT-A	
C278	CU3035	Chip C.	C1:608JBI1H102KT-A	
C279	CU3035	Chip C.	C1:608JBI1H102KT-A	
C280	CU3035	Chip C.	C1:608JBI1H102KT-A	
C281	CU3002	Chip C.	C1:608GCH1H010CT-A	
C282	CU3035	Chip C.	C1:608JBI1H102KT-A	
C283	CU3035	Chip C.	C1:608JBI1H102KT-A	
C284	CU3035	Chip C.	C1:608JBI1H102KT-A	
C285	CU3035	Chip C.	C1:608JBI1H102KT-A	
C286	CU3035	Chip C.	C1:608JBI1H102KT-A	
C287	CU3035	Chip C.	C1:608JBI1H102KT-A	
C288	CU3003	Chip C.	C1:608GCH1H020CT-A	TE
C289	CU3002	Chip C.	C1:608GCH1H020CT-A	1
C290	CU3012	Chip C.	C1:608GCH1H150CT-A	2
C291	CU3035	Chip C.	C1:608JBI1H102KT-A	1,2
C292	CU3035	Chip C.	C1:608JBI1H102KT-A	1,2
C293	CU3035	Chip C.	C1:608JBI1H102KT-A	1,2
C294	CU3011	Chip C.	C1:608CH1H100CT-A	2
C295	CU3035	Chip C.	C1:608JBI1H102KT-A	
C296	CU3035	Chip C.	C1:608JBI1H102KT-A	
C297	CU3011	Chip C.	C1:608CH1H100CT-A	
C298	CU3035	Chip C.	C1:608JBI1H102KT-A	
C299	CU3035	Chip C.	C1:608JBI1H102KT-A	
C300	CU3035	Chip C.	C1:608JBI1H102KT-A	
C301	CU9042	Chip C.	C201:2B1C104KT-A	E
C302	CU3051	Chip C.	C1:608JBI1E233KT-A	

Ref. No.	Parts No.	Description	Parts Name	Ver.
C303	CU9034	Chip C.	C201:2X7R1E333KT-A	
C304	CU7002	Chip C.	T1C2C31N2AC05030C	TE,1
C305	CU3047	Chip C.	C1:608JBI1H103KT-A	
C306	CU9042	Chip C.	C201:2B1C104KT-A	
C307	CU9042	Chip C.	C201:2B1C104KT-A	
C308	CU3047	Chip C.	C1:608JBI1H103KT-A	
C309	CU9019	Chip C.	C1:608GCH1H470JT-A	
C310	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C311	CU3035	Chip C.	C1:608JBI1H102KT-A	
C312	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C313	CU3028	Chip C.	C1:608JBI1H221JT-A	
C314	CU3035	Chip C.	C1:608JBI1H102KT-A	
C315	CCS027	Chip Tantal	TMCSA1A475MTR	
C316	CU3035	Chip C.	C1:608JBI1H102KT-A	
C317	CU3035	Chip C.	C1:608JBI1H102KT-A	
C318	CU3035	Chip C.	C1:608JBI1H102KT-A	
C319	CU3035	Chip C.	C1:608JBI1H102KT-A	
C320	CU3035	Chip C.	C1:608JBI1H102KT-A	
C321	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C322	CU3035	Chip C.	C1:608JBI1H102KT-A	
C323	CU3035	Chip C.	C1:608JBI1H102KT-A	
C324	CU3035	Chip C.	C1:608JBI1H102KT-A	
C325	CU3035	Chip C.	C1:608JBI1H102KT-A	
C326	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C327	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C328	CU3035	Chip C.	C1:608JBI1H102KT-A	
C329	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C330	CU3035	Chip C.	C1:608JBI1H102KT-A	
C331	CU3025	Chip C.	C1:608CH1H151JT-A	TE
C332	CU3035	Chip C.	C1:608JBI1H102KT-A	1,2
C333	CU3035	Chip C.	C1:608JBI1H102KT-A	
C334	CU3035	Chip C.	C1:608JBI1H102KT-A	
C335	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C336	CU3047	Chip C.	C1:608JBI1H103KT-A	
C337	CU3047	Chip C.	C1:608JBI1H103KT-A	
C338	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C339	CU3047	Chip C.	C1:608JBI1H103KT-A	
C340	CU3035	Chip C.	C1:608JBI1H102KT-A	
C341	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C342	CU3035	Chip C.	C1:608JBI1H102KT-A	
C343	CU3035	Chip C.	C1:608JBI1H102KT-A	
C344	CU3035	Chip C.	C1:608JBI1H102KT-A	
C345	CU3035	Chip C.	C1:608JBI1H102KT-A	
C346	CU3035	Chip C.	C1:608JBI1H102KT-A	
C347	CU3035	Chip C.	C1:608JBI1H102KT-A	
C348	CU3035	Chip C.	C1:608JBI1H102KT-A	
C349	CU3049	Chip Tantal	TMCSA1C105MTR	
C350	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C351	CU3035	Chip C.	C1:608JBI1H102KT-A	
C352	CU3035	Chip C.	C1:608JBI1H102KT-A	
C353	CU3035	Chip C.	C1:608JBI1H102KT-A	
C354	CU3035	Chip C.	C1:608JBI1H102KT-A	
C355	CU3035	Chip C.	C1:608JBI1H102KT-A	
C356	CU3035	Chip C.	C1:608JBI1H102KT-A	
C357	CU3035	Chip C.	C1:608JBI1H102KT-A	
C358	CU3035	Chip C.	C1:608JBI1H102KT-A	
C359	CU3035	Chip C.	C1:608JBI1H102KT-A	

Ref. No.	Parts No.	Description	Parts Name	Ver.
C360	CS028	Chip Tantal	ECST0J9858R	
C361	CU3035	Chip C.	C1:608JBI1H102KT-A	
C362	CU3002	Chip C.	C1:608GCH1H010CT-A	1,2
C363	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C364	CU3031	Chip C.	C1:608JBI1H471KT-A	
C365	CU3035	Chip C.	C1:608JBI1H102KT-A	
C366	CU3035	Chip C.	C1:608JBI1H102KT-A	
C367	CU3035	Chip C.	C1:608JBI1H102KT-A	
C368	CU3035	Chip C.	C1:608JBI1H102KT-A	
C369	CU3059	Chip C.	C1:608JBI1H102KT-A	
C370	CS027	Chip Tantal	TMCSA1A475MTR	
C371	CU9018	Chip C.	C321:6JBI1C105MT-N	
C372	CU3035	Chip C.	C1:608JBI1H102KT-A	
C373	CU3035	Chip C.	C1:608JBI1H102KT-A	
C374	CU3035	Chip C.	C1:608JBI1H102KT-A	
C375	CU3035	Chip C.	C1:608JBI1H102KT-A	
C376	CU3035	Chip C.	C1:608JBI1H102KT-A	
C377	CU3035	Chip C.	C1:608JBI1H102KT-A	
C378	CU3035	Chip C.	C1:608JBI1H102KT-A	
C379	CU3035	Chip C.	C1:608JBI1H102KT-A	
C380	CU3035	Chip C.	C1:608JBI1H102KT-A	
C381	CU3035	Chip C.	C1:608JBI1H102KT-A	
C382	CU3035	Chip C.	C1:608JBI1H102KT-A	
C383	CU3035	Chip C.	C1:608JBI1H102KT-A	
C384	CU3035	Chip C.	C1:608JBI1H102KT-A	
C385	CU3035	Chip C.	C1:608JBI1H102KT-A	
C386	CU3035	Chip C.	C1:608JBI1H102KT-A	
C387	CU3035	Chip C.	C1:608JBI1H102KT-A	
C388	CU3035	Chip C.	C1:608JBI1H102KT-A	
C389	CU3035	Chip C.	C1:608JBI1H102KT-A	
C390	CU3019	Chip C.	C1:608GCH1H470JT-A	
C391	CU3035	Chip C.	C1:608JBI1H102KT-A	
C392	CU3035	Chip C.	C1:608JBI1H102KT-A	
C393	CU3035	Chip C.	C1:608JBI1H102KT-A	
C394	CU3035	Chip C.	C1:608JBI1H102KT-A	
C395	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C396	CECV1CA100R	Electrolytic C.	CECV1CA100R	
C397	CU3035	Chip C.	C1:608JBI1H102KT-A	
C398	CU3035	Chip C.	C1:608JBI1H102KT-A	
C399	CU3035	Chip C.	C1:608JBI1H102KT-A	

UHF MAIN Unit

Ref. No.	Parts No.	Description	Parts Name	Ver.	Ref. No.	Parts No.	Description	Parts Name	Ver.	Ref. No.	Parts No.	Description	Parts Name	Ver.	Ref. No.	Parts No.	Description	Parts Name	Ver.	
IC202	XA00345	IC	MLC3372VM-EL		IC214	XT0125	Transistor	2SC4245(T1E95L)		R234	RK3038	Chip R.	ERJ3G5VJ102V	R291	RK3082	Chip R.	ERJ3G5VJ104V			
IC203	XA0097	IC	NLM4555M T1		IC216	XU0160	Transistor	DTCS86EKT1146		R235	RK3042	Chip R.	ERJ3G5VJ104V	R292	RK3050	Chip R.	ERJ3G5VJ103V			
IC205	XA0119	IC	AN8010M-IE1		IC217	XU0061	Transistor	UN5211-TX		R236	RK3062	Chip R.	ERJ3G5VJ222V	R293	RK3026	Chip R.	ERJ3G5VJ101V			
IC208	XA0082	IC	MC7808CT		IC218	XT0061	Transistor	2SB1132T100Q		R237	RK3050	Chip R.	ERJ3G5VJ103V	R294	RK3051	Chip R.	ERJ3G5VJ123V			
JK201	UE0257	Connector	AS3-30190-15		IC219	XT0061	Transistor	2SB1132T100Q		R238	RK3090	Chip R.	ERJ3G5VJ222V	R295	RK3050	Chip R.	ERJ3G5VJ103V			
JK202	UAK040A	Connector	R-82.D'0.2Mplug15A		IC220	XU0061	Transistor	UN5211-TX		R239	RK3042	Chip R.	ERJ3G5VJ222V	R296	RK3060	Chip R.	ERJ3G5VJ683V			
L201	OC0061	Chip Coil	NL3225221-033J		IC222	XU0061	Transistor	UN5211-TX		R240	RK3042	Chip R.	ERJ3G5VJ222V	R297	RK3060	Chip R.	ERJ3G5VJ683V			
L202	OC0059	Chip Coil	NL3225221-022J		IC223	XU0058	Transistor	FKM2		R241	RK3042	Chip R.	ERJ3G5VJ222V	R298	RK3026	Chip R.	ERJ3G5VJ101V			
L203	OC0059	Chip Coil	NL3225221-022J		IC224	XU0061	Transistor	UN5211-TX		R242	RK3044	Chip R.	ERJ3G5VJ332V	R299	RK3050	Chip R.	ERJ3G5VJ103V			
L204	OKA25D	Coil	MR3.0 2.5T 0.6		IC225	XU0046	Transistor	XN111M-TX		R243	RK3050	Chip R.	ERJ3G5VJ103V	R300	RK3046	Chip R.	ERJ3G5VJ123V			
L205	OKA15D	Coil	MR3.0 1.5T 0.6		IC226	XU0061	Transistor	UN5211-TX		R244	RK3038	Chip R.	ERJ3G5VJ102V	R301	RK3001	Chip R.	ERJ3G5V0800V			
L206	OKA55E	Coil	MR3.0 5.5T 0.8		IC227	XT0112	Transistor	2SB1292F		R245	RK3001	Chip R.	ERJ3G5V0800V	R302	RK3070	Chip R.	ERJ3G5VJ474V			
L207	OKA95D	Coil	MR 3.0 9.5T 0.6		IC228	XT0037	Transistor	2SC2412KT146R		R246	RK3022	Chip R.	ERJ3G5VJ470V	R303	RK3042	Chip R.	ERJ3G5VJ222V			
L208	OKA25D	Coil	MR3.0 2.5T 0.6		IC229	XT0094	Transistor	2SA1576T106R		R247	RK3050	Chip R.	ERJ3G5VJ103V	R304	RK3050	Chip R.	ERJ3G5VJ222V			
L209	OKA15E	Coil	MR3.0 1.5T 0.8		IC230	XT0126	Transistor	2SB1302S-TD		R248	RK3038	Chip R.	ERJ3G5VJ102V	R305	RK3001	Chip R.	ERJ3G5V0800V			
L210	OKA15E	Coil	MR3.0 1.5T 0.8		IC231	XT0095	Transistor	2SC4081T106R		R250	RK3036	Chip R.	ERJ3G5VJ681V	R306	RK3050	Chip R.	ERJ3G5VJ123V			
L211	OKA15E	Coil	MR3.0 1.5T 0.8		IC233	XU0160	Transistor	DTCS86EKT146		R252	RK3034	Chip R.	ERJ3G5VJ471V	R308	RK3054	Chip R.	ERJ3G5VJ223V			
L212	OKA15E	Coil	MR3.0 1.5T 0.8		IC234	XU0160	Transistor	UN5213-TX		R253	RK3034	Chip R.	ERJ3G5V0800V	R309	RK3046	Chip R.	ERJ3G5VJ472V			
L213	OKA15E	Coil	MR3.0 1.5T 0.8		IC235	XT0095	Transistor	2SC4081T106R		R254	RK4018	Chip R.	ERJ-12VJ220V	R310	RK3050	Chip R.	ERJ3G5VJ472V			
L214	OKA12E	Coil	MR3.0 1.25T 0.8		R201	RK3055	Chip R.	ERJ3G5VJ273V		R255	RK4026	Chip R.	ERJ-12VJ101V	R311	RK3041	Chip R.	ERJ3G5VJ182V			
L215	OKA12E	Coil	MR3.0 1.25T 0.8		R202	RK3060	Chip R.	ERJ3G5VJ683V		R256	RK0044	Chip R.	ERJ66EYJ992V	R312	RK3038	Chip R.	ERJ3G5VJ102V			
L216	OC0398	Chip Coil	LON1A15ML04		R203	RK3058	Chip R.	ERJ3G5VJ473V		R257	RK0128	Chip R.	ERJ66EYJ586V	R313	RK3042	Chip R.	ERJ3G5VJ223V			
L217	OC0398	Chip Coil	LON1A15ML04		R204	RK3038	Chip R.	ERJ3G5VJ102V		R258	RK0044	Chip R.	ERJ66EYJ992V	R314	RK3001	Chip R.	ERJ3G5V0800V			
L218	QA0113	Coil	KE-07319		R205	RK3038	Chip R.	ERJ3G5VJ102V		R259	RK0107	Chip R.	ERJ66EY0800V	R315	RK3001	Chip R.	ERJ3G5V0800V			
L218	QA0114	Coil	KE-07320		R206	RK3042	Chip R.	ERJ3G5VJ473V		R260	RK3058	Chip R.	ERJ3G5VJ473V	R316	RK3054	Chip R.	ERJ3G5VJ223V			
L218	QA0128	Coil	QA0128		R207	RK3058	Chip R.	ERJ3G5VJ684V		R261	RK3042	Chip R.	ERJ3G5VJ222V	R317	RK3054	Chip R.	ERJ3G5VJ223V			
L219	QA0113	Coil	KE-07319		R208	RK3071	Chip R.	ERJ3G5VJ564V		R262	RK3001	Chip R.	ERJ3G5VJ101V	R318	RK3043	Chip R.	ERJ3G5VJ223V			
L219	QA0114	Coil	KE-07320		R209	RK3034	Chip R.	ERJ3G5VJ471V		R263	RK0069J	Carbon R.	ERDSTJ104A	R318	RK3046	Chip R.	ERJ3G5VJ992V			
L219	QA0128	Coil	QA0128		R210	RK3054	Chip R.	ERJ3G5VJ223V		R264	RK3056	Chip R.	ERJ3G5VJ333V	R319	RK3024	Chip R.	ERJ3G5VJ471V			
L220	OC0060	Chip Coil	NL322522T-027J		R211	RK3033	Chip R.	ERJ3G5VJ491V		R265	RK3026	Chip R.	ERJ3G5VJ101V	R320	RK3054	Chip R.	ERJ3G5VJ223V			
L220	OC0059	Chip Coil	NL322522T-022J		R212	RK3042	Chip R.	ERJ3G5VJ222V		R266	RK3026	Chip R.	ERJ3G5VJ101V	R321	RK3060	Chip R.	ERJ3G5VJ103V			
L220	OC0057	Chip Coil	NL322522T-015J		R213	RK3066	Chip R.	ERJ3G5VJ434V		R267	RK3026	Chip R.	ERJ3G5VJ101V	R322	RK4034	Chip R.	ERJ3G5VJ103V			
L221	OC0062	Chip Coil	NL322522T-039J		R214	RK3026	Chip R.	ERJ3G5VJ101V		R268	RK3018	Chip R.	ERJ3G5VJ102V	R323	RK3050	Chip R.	ERJ3G5VJ103V			
L222	OC0043	Chip Coil	NL322522T-2R2J		R215	RK3030	Chip R.	ERJ3G5VJ221V		R269	RK3018	Chip R.	ERJ3G5VJ102V	R324	RK3053	Chip R.	ERJ3G5VJ183V			
L223	OC0048	Chip Coil	NL322522T-100J		R216	RK3030	Chip R.	ERJ3G5VJ103V		R270	RK3054	Chip R.	ERJ3G5VJ223V	R325	RK3043	Chip R.	ERJ3G5VJ223V			
L227	OC0402	Chip Coil	LONTA99NJ04		R217	RK3042	Chip R.	ERJ3G5VJ222V		R271	RK3001	Chip R.	ERJ3G5VJ101V	R326	RK3042	Chip R.	ERJ3G5VJ222V			
Q201	XU0061	Transistor	UN5211-TX		R218	RK3034	Chip R.	ERJ3G5VJ182V		R272	RK3054	Chip R.	ERJ3G5VJ223V	R327	RK3042	Chip R.	ERJ3G5VJ222V			
Q202	XT0095	Transistor	2SC4081T106R		R219	RK3058	Chip R.	ERJ3G5VJ103V		R273	RK3038	Chip R.	ERJ3G5VJ102V	R328	RK3026	Chip R.	ERJ3G5VJ101V			
Q203	XT0095	Transistor	2SC4081T106R		R220	RK3050	Chip R.	ERJ3G5VJ224V		R274	RK3054	Chip R.	ERJ3G5VJ223V	R329	RK3042	Chip R.	ERJ3G5VJ222V			
Q204	XT0095	Transistor	2SC4081T106R		R221	RK3057	Chip R.	ERJ3G5VJ393V		R275	RK3026	Chip R.	ERJ3G5VJ101V	R330	RK3060	Chip R.	ERJ3G5VJ103V			
Q205	XU0174	Transistor	UN5112-TX		R222	RK3050	Chip R.	ERJ3G5VJ103V		R276	RK3002	Chip R.	ERJ3G5VJ331V	R331	RK3050	Chip R.	ERJ3G5VJ103V			
Q206	XT0095	Transistor	2SC4245(T1E95L)		R223	RK3038	Chip R.	ERJ3G5VJ102V		R277	RK3032	Chip R.	ERJ3G5VJ470V	R332	RK3050	Chip R.	ERJ3G5VJ103V			
Q207	XT0125	Transistor	2SC4245(T1E95L)		R224	RK3050	Chip R.	ERJ3G5VJ103V		R278	RK3036	Chip R.	ERJ3G5VJ681V	R333	RK4034	Chip R.	ERJ-12VJ471V			
Q208	XT0146	Transistor	2SC5226-4TL		R225	RK3038	Chip R.	ERJ3G5VJ102V		R279	RK3070	Chip R.	ERJ3G5VJ474V	R334	RK3001	Chip R.	ERJ3G5V0800V			
Q209	XT0048	Transistor	2SC35771 RE		R226	RK3066	Chip R.	ERJ3G5VJ224V		R280	RK3030	Chip R.	ERJ3G5VJ221V	R335	RK3018	Chip R.	ERJ3G5VJ101V			
Q210	XT0084	Transistor	2SC2964-1T1		R227	RK3050	Chip R.	ERJ3G5VJ103V		R281	RK3026	Chip R.	ERJ3G5VJ101V	R336	RK3038	Chip R.	ERJ3G5VJ103V			
Q211	XE0013	FET	3SK184STX		R228	RK3038	Chip R.	ERJ3G5VJ102V		R282	RK3058	Chip R.	ERJ3G5VJ473V	R337	RK3018	Chip R.	ERJ3G5VJ220V			
Q212	XE0022	FET	2SK1577		R229	RK3056	Chip R.	ERJ3G5VJ333V		R283	RK3063	Chip R.	ERJ3G5VJ153V	R338	RK3026	Chip R.	ERJ3G5VJ473V			
Q213	XE0013	FET	3SK184STX		R230	RK3038	Chip R.	ERJ3G5VJ102V		R284	RK3052	Chip R.	ERJ3G5VJ153V	R339	RK3058	Chip R.	ERJ3G5VJ473V			
					R232	RK3038	Chip R.	ERJ3G5VJ102V		R285	RK3054	Chip R.	ERJ3G5VJ223V	R340	RK3038	Chip R.	ERJ3G5VJ101V			
					R233	RK3056	Chip R.	ERJ3G5VJ333V		R286	RK3062	Chip R.	ERJ3G5VJ104V	R341	RK3038	Chip R.	ERJ3G5VJ102V			
										R287	RK3001	Chip R.	ERJ3G5V0800V	R342	RK3038	Chip R.	ERJ3G5VJ102V			
										R288	RK3038	Chip R.	ERJ3G5VJ102V	R351	RK3058	Chip R.	ERJ3G5VJ473V			
										R289	RK3069	Chip R.	ERJ3G5VJ394V	R353	RK3064	Chip R.	ERJ3G5VJ223V			
										R290	RK3042	Chip R.	ERJ3G5VJ222V	R353	RK3038	Chip R.	ERJ3G5VJ102V			

UHF MAIN Unit

Ref. No.	Parts No.	Description	Parts Name	Ver.
R354	RK3058	Chip R.	ERJ3GSYJ473V	
R355	RK3050	Chip R.	ERJ3GSYJ103V	
R357	RK1107	Chip R.	ERJ8GEY0R00V	
R359	RK3050	Chip R.	ERJ3GSYJ103V	T,1,2
R361	RK3001	Chip R.	ERJ3GSY0R00V	
R363	RK3001	Chip R.	ERJ3GSY0R00V	E
R366	RK3001	Chip R.	ERJ3GSY0R00V	E
R367	RK3026	Chip R.	ERJ3GSYJ101V	
R368	RK3048	Chip R.	ERJ3GSYJ682V	
R369	RK3046	Chip R.	ERJ3GSYJ472V	
R370	RK1107	Chip R.	ERJ8GEY0R00V	1,2
TC201	CT0012	Thm. C	CTZ10AW	
TC202	CT0012	Thm. C	CTZ10AW	
TH201	XS0031	Thermister	NTCCM16084BH682KC	
TH202	XS0031	Thermister	NTCCM16084BH682KC	
VR201	RH0104	Thm. Pot	EXM1YSX50BE4	
VR202	RH0108	Thm. Pot	EXM1YSX50B15	
VR203	RH0104	Thm. Pot	EXM1YSX50BE4	
VR204	RH0106	Thm. Pot	EXM1YSX50B04	
VR205	RH0106	Thm. Pot	EXM1YSX50B04	
X201	XK0002	Discriminator	CDBM455C7	
X202	XQ0058A	Crystal	UM-5-30.395MHz	
	S00034	Spring	Earth Spring DR130	
Y201	TZ0049		Silicon Dumper	
Y202	TZ0049		Silicon Dumper	

Ref. No.	Parts No.	Description	Parts Name	Ver.
C401	CU3035	Chip C.	C16084BH102KT-A	
C402	CU3035	Chip C.	C16084BH102KT-A	
C403	CU3035	Chip C.	C16084BH102KT-A	
C404	CU8040	Chip C.	C2012B1E473KT	
C405	CU3035	Chip C.	C16084BH102KT-A	
C406	CS0237	ChipTantal	TMCCM1A475MTR	
C407	CU9018	Chip C.	C3216B1C105MT-N	
C408	CU3035	Chip C.	C16084BH102KT-A	
C409	CU3035	Chip C.	C16084BH102KT-A	
C410	CE0374	Electolytic C.	16CV 100B5	
C411	CU3035	Chip C.	C16084BH102KT-A	
C412	CU3042	Chip C.	C16084BH102KT-A	
C413	CU3059	Chip C.	C16084BH102KT-A	
C414	CU9042	Chip C.	C2012B1C104KT-A	
C415	CU3047	Chip C.	C16084BH102KT-A	
C416	CU9047	Chip C.	C16084BH102KT-A	
C417	CU3014	Chip C.	C16084BH102KT-A	
C418	CU3014	Chip C.	C16084BH102KT-A	
C419	CU3047	Chip C.	C16084BH102KT-A	
C420	CU3035	Chip C.	TMCCM1A106MTR	
C421	CU3035	Chip C.	C16084BH102KT-A	
C422	CE0372	ChipTantal	TMCCM1C106MTR	
C423	CU9051	Chip C.	C16084BH102KT-A	
C424	CU9032	Chip C.	C2012B1E223KT	
C425	CU9032	Chip C.	C2012B1E223KT	
C426	CE0372	ChipTantal	TMCCM1C106MTR	
C427	CU3023	Chip C.	C16084BH102KT-A	
C428	CU3023	Chip C.	C16084BH102KT-A	
C429	CU3035	Chip C.	C16084BH102KT-A	
C430	CU3035	Chip C.	C16084BH102KT-A	
C431	CU3023	Chip C.	C16084BH102KT-A	
C432	CU3023	Chip C.	C16084BH102KT-A	
C433	CU3035	Chip C.	C16084BH102KT-A	
C434	CU3035	Chip C.	C16084BH102KT-A	
C435	CU3035	Chip C.	C16084BH102KT-A	
C436	CU3023	Chip C.	C16084BH102KT-A	
C437	CU3023	Chip C.	C16084BH102KT-A	
C439	CU3023	Chip C.	C16084BH102KT-A	
C440	CU3035	Chip C.	C16084BH102KT-A	
C441	CU3035	Chip C.	C16084BH102KT-A	
C442	CU3023	Chip C.	C16084BH102KT-A	
C443	CU3023	Chip C.	C16084BH102KT-A	
C444	CU3023	Chip C.	C16084BH102KT-A	
C445	CU3035	Chip C.	C16084BH102KT-A	
C446	CU3035	Chip C.	C16084BH102KT-A	
C447	CU3035	Chip C.	C16084BH102KT-A	
C448	CU3047	Chip C.	C16084BH102KT-A	
C449	CU3059	Chip C.	C16084BH102KT-A	
C450	CU3035	Chip C.	C16084BH102KT-A	
C451	CU3035	Chip C.	C16084BH102KT-A	
C452	CS0049	ChipTantal	TMCCM1C105MTR	

Ref. No.	Parts No.	Description	Parts Name	Ver.
CM401	UW0035	Connector	HUC0272-010022	
CM402	UE0173	Connector	B12B-ZR	
CM403	UE0291	Connector	17R-UE	
CM404	UE0225	Connector	19R-UE	
CM405	UE0292	Connector	B07B-ZR	1,2
DM01	XLU0039	Chip LED	L1TEP33A	
DM02	XLU0039	Chip LED	L1TEP33A	
DM03	XD0291	Diode	MA729-TX	
DM04	XD0291	Diode	MA729-TX	
DM05	XA0250	Diode	MA742 TX	
DM06	XKD0254	Diode	1SS355 TE17	
DM07	XKD0255	Diode	MA8110H-TX	
DM08	XD0187	Diode	DTZ118 TT11	
DM09	XD0230	Diode	DAN202U TT106	
EL401	ELU0031	LCD	HL08792-012300	1,2
IC401	XA0420	IC	M88287M8L-107FP	
IC402	XA0368	IC	AT24C16N-10SH-2.7	
IC403	XA0309	IC	RMSV125AA-11	
IC404	XA0238	IC	AV7BL05M-E1	
IC405	XA0315	IC	RHSV460AA	
JP401	MA0C02AA	Wire	Wire #02 Blue	T
JP402	MPAL05AA	Wire	#30P2-050-02	1,2
JP403	MPAL05AA	Wire	#30P2-050-02	1,2
JP404	MPAL02AA	Wire	Wire #02 Red	1,2
LP401	EP0003	Lightbulb	B0031-30403A	
LP402	EP0003	Lightbulb	B0031-30403A	
Q401	XT0095	Transistor	2SC4081TT106R	
Q402	XU0178	Transistor	XP1215	
Q403	XU0178	Transistor	XP1215	
Q404	XU0061	Transistor	UNS211-TX (T)	1,2
Q405	XT0113	Transistor	2SC2837YTE12L	
Q406	XU0179	Transistor	UNS114-TX	
Q407	XU0061	Transistor	UNS211-TX	
RA01	RK3060	Chip R.	ERJ3GSYJ683V	
RA02	RK3066	Chip R.	ERJ3GSYJ333V	
RA03	RK3026	Chip R.	ERJ3GSYJ101V	
RA04	RK3072	Chip R.	ERJ3GSYJ684V	
RA05	RK3043	Chip R.	ERJ3GSYJ272V	
RA06	RK3026	Chip R.	ERJ3GSYJ101V	
RA07	RK3030	Chip R.	ERJ3GSYJ221V	
RA08	RK3001	Chip R.	ERJ3GSY0R00V	
RA09	RK3057	Chip R.	ERJ3GSYJ993V	
RA10	RK3060	Chip R.	ERJ3GSYJ683V	
RA11	RK3056	Chip R.	ERJ3GSYJ333V	
RA12	RK3046	Chip R.	ERJ3GSYJ472V	
RA13	RK3058	Chip R.	ERJ3GSYJ473V	

Ref. No.	Parts No.	Description	Parts Name	Ver.
RA14	RK3060	Chip R.	ERJ3GSYJ683V	T,E
RA15	RK3067	Chip R.	ERJ3GSYJ993V	
RA16	RK3057	Chip R.	ERJ3GSYJ993V	
RA17	RK3060	Chip R.	ERJ3GSYJ683V	E
RA19	RK3001	Chip R.	ERJ3GSY0R00V	E
RA20	RK3001	Chip R.	ERJ3GSY0R00V	E
RA21	RK3038	Chip R.	ERJ3GSYJ102V	
RA22	RK3046	Chip R.	ERJ3GSYJ472V	
RA23	RK3046	Chip R.	ERJ3GSYJ472V	
RA24	RK3046	Chip R.	ERJ3GSYJ472V	
RA25	RA0008	Chip R.	EXBV4V1021V	
RA26	RA0008	Chip R.	EXBV4V1021V	
RA27	RA0009	Chip R.	EXBV4V1021V	
RA28	RK3038	Chip R.	ERJ3GSYJ102V	
RA29	RK3038	Chip R.	ERJ3GSYJ102V	
RA30	RA0008	Chip R.	EXBV4V1021V	
RA31	RK3057	Chip R.	ERJ3GSYJ993V	
RA32	RK3054	Chip R.	ERJ3GSYJ223V	
RA33	RK3038	Chip R.	ERJ3GSYJ102V	
RA34	RK3050	Chip R.	ERJ3GSYJ103V	
RA35	RA0009	Chip R.	EXBV4V1021V	
RA36	RA0009	Chip R.	EXBV4V1021V	
RA37	RK3043	Chip R.	ERJ3GSYJ272V	
RA38	RK3074	Chip R.	ERJ3GSYJ105V	
RA39	RK3058	Chip R.	ERJ3GSYJ473V	
RA40	RK3050	Chip R.	ERJ3GSYJ103V	
RA41	RK3038	Chip R.	ERJ3GSYJ102V	
RA42	RK3058	Chip R.	ERJ3GSYJ473V	
RA43	RK3070	Chip R.	ERJ3GSYJ474V	
RA44	RK3058	Chip R.	ERJ3GSYJ473V	
RA45	RK3070	Chip R.	ERJ3GSYJ474V	
RA46	RK0005	Chip R.	ERJ8GEYJ220V	
RA47	RK3034	Chip R.	ERJ3GSYJ471V	
RA48	RK3034	Chip R.	ERJ3GSYJ471V	
RA49	RK3034	Chip R.	ERJ3GSYJ471V	
RA50	RK3034	Chip R.	ERJ3GSYJ471V	
RA51	RK3034	Chip R.	ERJ3GSYJ471V	
RA52	RK3050	Chip R.	ERJ3GSYJ103V	
RA53	RK3050	Chip R.	ERJ3GSYJ103V	
RA54	RK3046	Chip R.	ERJ3GSYJ472V	
RA55	RK3046	Chip R.	ERJ3GSYJ472V	
RA56	RK3042	Chip R.	ERJ3GSYJ222V	
RA57	RK3058	Chip R.	ERJ3GSYJ473V	
RA58	RK3001	Chip R.	ERJ3GSY0R00V	
RA59	RK3001	Chip R.	ERJ3GSY0R00V	
RA60	RK3001	Chip R.	ERJ3GSY0R00V	
RA61	RK3050	Chip R.	ERJ3GSYJ103V	
RA62	RK3050	Chip R.	ERJ3GSYJ103V	
RA63	RK3062	Chip R.	ERJ3GSYJ104V	
RA64	RK3046	Chip R.	ERJ3GSYJ472V	
RA65	RK3050	Chip R.	ERJ3GSYJ103V	
RA66	RA0008	Chip R.	EXBV4V1021V	
RA67	RA0008	Chip R.	EXBV4V1021V	
RA68	RK3038	Chip R.	ERJ3GSYJ102V	

Note: Version1=TE1, Version2=TE2

Note: Version1=TE1, Version2=TE2

FRONT CPU Unit / VHF VCO Unit

Ref. No.	Parts No.	Description	Parts Name	Ver.
R470	RK3058	Chip R.	ERJ3G5YJ473V	
R471	RK3058	Chip R.	ERJ3G5YJ473V	
R472	RK3058	Chip R.	ERJ3G5YJ473V	
R473	RK3058	Chip R.	ERJ3G5YJ473V	
R474	RK3058	Chip R.	ERJ3G5YJ473V	
R475	RK3058	Chip R.	ERJ3G5YJ473V	
R476	RK3058	Chip R.	ERJ3G5YJ473V	
R477	RK3058	Chip R.	ERJ3G5YJ473V	
R478	RK3058	Chip R.	ERJ3G5YJ473V	
R479	RK3058	Chip R.	ERJ3G5YJ473V	
R481	RK3001	Chip R.	ERJ3G5Y0900V	
R482	RK3038	Chip R.	ERJ3G5YJ102V	
R483	RK3058	Chip R.	ERJ3G5YJ473V	
R484	RK3058	Chip R.	ERJ3G5YJ473V	
R486	RK3038	Chip R.	ERJ3G5YJ102V	
R487	RK0107	Chip R.	ERJ3G5Y0900V	
RE401	UR0015	Reary Encoder	RH90N74E20 20F	
SW401	UU0017	Switch	SKOD-AA	
SW402	UU0023	Switch	SKOMAH	
SW403	UU0023	Switch	SKOMAH	
SW404	UU0023	Switch	SKOMAH	
SW405	UU0023	Switch	SKOMAH	
SW406	UU0023	Switch	SKOMAH	
SW407	UC0011	Switch	ESB-64801	
SW408	UU0023	Switch	SKOMAH	
VR401	RV0032	Trim. Pot	RH96N74 15F A10K	
VR402	RV0032	Trim. Pot	RH96N74 15F A10K	
X401	XO0084	Cystal	39C 4.19MHz	
	ST0058Z	LCD Holder	LCD Sheet DR605T	
	DH0011	Reflection Sheet	DR605T	
	FG0217	LCD Rubber Connector	LCD Light DR605T	
	DG0025Z	Tube	0.7mm	
	TT1001			

VHF VCO Unit / UHF VCO Unit

Ref. No.	Parts No.	Description	Parts Name	Ver.
C501	CU3035	Chip C.	C1608JB1H102KT-A	
C502	CU3035	Chip C.	C1608JB1H102KT-A	
C503	CU3035	Chip C.	C1608JB1H102KT-A	
C504	CU3035	Chip C.	C1608JB1H102KT-A	
C505	CU3035	Chip C.	C1608JB1H102KT-A	
C506	CS0063	Chip Tantal	TMC5A1V104MTR	
C507	CU3035	Chip C.	C1608JB1H102KT-A	
C508	CU3027	Chip C.	C1608CH1H102CT-A	
C509	CU3064	Chip C.	C1608CH1H102CT-A	
C510	CU3011	Chip C.	C1608CH1H100CT-A	
C511	CU3009	Chip C.	C1608CH1H080CT-A	
C512	CU3009	Chip C.	C1608CH1H080CT-A	
C513	CU3035	Chip C.	C1608JB1H102KT-A	
C514	CU3015	Chip C.	C1608CH1H220JT-A	
C515	CU3035	Chip C.	C1608JB1H102KT-A	
C516	CU3035	Chip C.	C1608JB1H102KT-A	
C518	CU3064	Chip C.	C1608CH1H102CT-A	
C519	CU3047	Chip C.	C1608JB1H103KT-A	
C520	CU3051	Chip C.	C1608JB1E23KT-A	
C521	CS0220	Chip Tantal	TMCMA1C225MTR	
C522	CS0220	Chip Tantal	TMCMA1C225MTR	
C525	CU3035	Chip C.	C1608JB1H102KT-A	
C526	CU3035	Chip C.	C1608JB1H102KT-A	
C527	CU3023	Chip C.	C1608CH1H101JT-A	
C528	CU3023	Chip C.	C1608CH1H101JT-A	
C529	CU3023	Chip C.	C1608CH1H101JT-A	
C530	CU3047	Chip C.	C1608JB1H103KT-A	
C531	CU3008	Chip C.	C1608CH1H070CT-A	
C532	CU3035	Chip C.	C1608JB1H102KT-A	
C533	CU3011	Chip C.	C1608CH1H100CT-A	
C534	CS0216	Chip Tantal	TMCMB1A106MTR	
C535	CU3035	Chip C.	C1608JB1H102KT-A	
C537	CU3035	Chip C.	C1608JB1H102KT-A	
IC501	XA0352	IC	M64076GP	
L501	OC0442	Chip Coil	MLF1608A190KT	
L502	OC0106	Chip Coil	LEF01572R2M	
L503	OC0103	Chip Coil	LEF01517R2M	
L504	OC0106	Chip Coil	LEF01572R2M	
L505	QA0127	Chip Coil	VCO coil SCBM	
L506	OC0430	Chip Coil	MLF1608DR10KT	
L507	OC0103	Chip Coil	LEF01517R2M	

Ref. No.	Parts No.	Description	Parts Name	Ver.
Q501	XU0061	Transistor	2SK508K52-12B	
Q502	XT0124	Transistor	2SC4215-V(TE95L)	
Q503	XU0061	Transistor	2SC4215-V(TE95L)	
Q504	XU0061	Transistor	2SC4215-V(TE95L)	
Q505	XT0124	Transistor	2SC4215-V(TE95L)	
R501	RK3050	Chip R.	ERJ3G5YJ103V	
R502	RK3060	Chip R.	ERJ3G5YJ683V	
R503	RK3022	Chip R.	ERJ3G5YJ473V	
R504	RK3058	Chip R.	ERJ3G5YJ473V	
R505	RK3042	Chip R.	ERJ3G5YJ222V	
R506	RK3042	Chip R.	ERJ3G5YJ222V	
R507	RK3054	Chip R.	ERJ3G5YJ223V	
R508	RK3024	Chip R.	ERJ3G5YJ471V	
R509	RK3018	Chip R.	ERJ3G5YJ220V	
R510	RK3042	Chip R.	ERJ3G5YJ222V	
R511	RK3046	Chip R.	ERJ3G5YJ472V	
R512	RK3026	Chip R.	ERJ3G5YJ101V	
R513	RK3034	Chip R.	ERJ3G5YJ471V	
R514	RK3001	Chip R.	ERJ3G5Y0900V	
R515	RK3050	Chip R.	ERJ3G5YJ103V	
R516	RK3054	Chip R.	ERJ3G5YJ223V	
R517	RK3030	Chip R.	ERJ3G5YJ221V	
R518	RK3047	Chip R.	ERJ3G5YJ682V	
R520	RK3064	Chip R.	ERJ3G5YJ223V	
R521	RK3034	Chip R.	ERJ3G5YJ471V	
R522	RK3043	Chip R.	ERJ3G5YJ227V	
R523	RK3026	Chip R.	ERJ3G5YJ101V	
R524	RK3038	Chip R.	ERJ3G5YJ102V	
R525	RK3038	Chip R.	ERJ3G5YJ102V	
	TS0116Z	VCO Case	VCO Case DR605	

Ref. No.	Parts No.	Description	Parts Name	Ver.
C601	CU3035	Chip C.	C1608JB1H102KT-A	
C602	CU3003	Chip C.	C1608CH1H020CT-A	
C602	CU3064	Chip C.	C1608CH1H102CT-A	
C603	CS0216	Chip Tantal	TMCMB1A106MTR	
C604	CU3035	Chip C.	C1608JB1H102KT-A	
C606	CS0063	Chip Tantal	TMC5A1V104MTR	
C607	CU3035	Chip C.	C1608JB1H102KT-A	
C608	CU3019	Chip C.	C1608CH1H070CT-A	
C609	CU3008	Chip C.	C1608CH1H070CT-A	
C609	CU3009	Chip C.	C1608CH1H080CT-A	
C610	CU3006	Chip C.	C1608CH1H080CT-A	
C611	CU3002	Chip C.	C1608CH1H0100CT-A	
C612	CU3035	Chip C.	C1608JB1H102KT-A	
C613	CU3011	Chip C.	C1608CH1H100CT-A	
C614	CU3047	Chip C.	C1608JB1H103KT-A	
C615	CU3035	Chip C.	C1608JB1H102KT-A	
C616	CU3051	Chip C.	C1608JB1E23KT-A	
C617	CS0220	Chip Tantal	TMCMA1C225MTR	
C618	CS0220	Chip Tantal	TMCMA1C225MTR	
C620	CU3035	Chip C.	C1608JB1H102KT-A	
C621	CU3035	Chip C.	C1608JB1H102KT-A	
C622	CU3023	Chip C.	C1608CH1H101JT-A	
C623	CU3023	Chip C.	C1608CH1H101JT-A	
C624	CU3023	Chip C.	C1608CH1H101JT-A	
C625	CU3047	Chip C.	C1608JB1H103KT-A	
C626	CU3006	Chip C.	C1608CH1H070CT-A	
C627	CU3035	Chip C.	C1608JB1H102KT-A	
C628	CU3003	Chip C.	C1608CH1H020CT-A	
C632	CU3031	Chip C.	C1608JB1H471KT-A	
C633	CU3035	Chip C.	C1608JB1H102KT-A	
CN601	UE0295	Connector	B7P-BC2	
CN602	UE0188	Connector	B9P-BC2	
D601	XD0131	Diode	1SV214 TPH4	
D602	XD0131	Diode	1SV214 TPH4	
D603	XD0131	Diode	1SV214 TPH4	
IC601	XA0352	IC	M64076GP	
L601	OC0101	Chip Coil	LEF01572R2M	
L602	OC0101	Chip Coil	LEF01572R2M	
L603	OC0101	Chip Coil	LEF01572R2M	
L604	OC0096	Chip Coil	LEF01572R2M	
L605	OC0430	Chip Coil	MLF1608DR10KT	
L606	QA0093	Chip Coil	KST12-275-1	

Note: Version1=TE1, Version2=TE2

Note: Version1=TE1, Version2=TE2

ADJUSTMENT

1) Required Test Equipment

1. Digital Multimeter

2. Regulated Power Supply

Supply voltage: 13.8VDC
Current: 15A or more

3. Oscilloscope

Measurable frequency: Audio Frequency

4. Spectrum Analyzer

Measuring range: Up to 2GHz or more

5. Tracking Generator

Output frequency: Up to 2GHz or more

6. Dummy Load

Measurable frequency: Up to 500MHz
Impedance: 50Ω
Power: 50W or more

7. Speaker

Impedance: 8Ω

8. SSG

Output frequency: Up to 1GHz
Output level: -20dB/0.1μV to 120dB/1V
Modulation: AM/FM

9. Transceiver Tester

Up to 500MHz

a. Frequency Counter

b. Power Meter

Impedance: 50Ω
Measuring range: 50W or more

c. Audio Voltmeter

Measurable frequency: 50Hz ~ 10kHz
Sensitivity: 1mV ~ 10V

d. Distortion Meter

Measurable frequency: 1kHz
Input level: Up to 40dB
Distortion level: 1% ~ 100%



e. Audio Generator

Output frequency: 1kHz ~ 10kHz
Output impedance: 600Ω


f. Linear Detector

10. 9600bps Hi-Speed Packet Testing

While holding the FUNC key down, press the VHF knob. "9600" is shown on the sub-band frequency display.

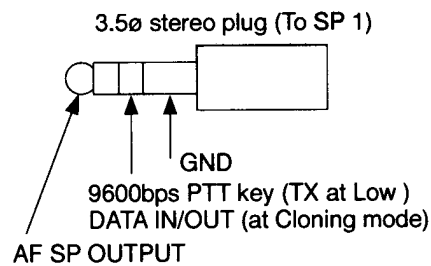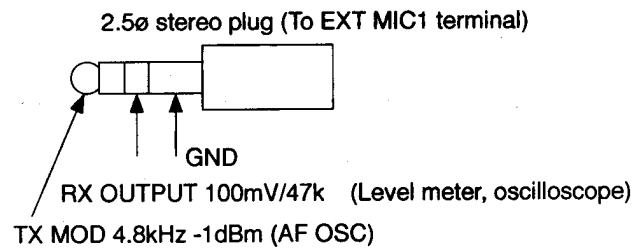

Mic terminal

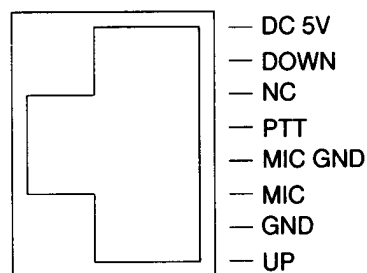

Test Equipment

1. All SSG output is indicated by EMF.
2. AG output level connecting with the load is measured.
3. Standard Modulation: 1kHz \pm 3.5kHz/DEV
4. Audio Output level: 50mW~100mW at 8 Ω
5. Test Equipment level filter: HPF (30Hz~50Hz), LPF (10kHz~15kHz)
6. Coaxial cable: 5D2W 1m

Note:


1. Power supply voltage is 13.8V.
Power switch is off.
2. Turn the volume knobs counterclockwise.
3. SQ volume (press VHF or UHF after pressing FUNC key) S0=squelch is open. S9=tight is closed.
4. Press and hold the "F" key, then turn the power switch on.
The display lights full.

2) UHF PLL Adjustment

Item	Condition	Measurement			Adjustment			Specifications
		Equipment	Unit	Terminal	Unit	Parts	Method	
Reference Frequency	f=435.00 TX	Freq. Counter Power Meter	Back	UHF ANT	VHF Main	TC1	435.0000MHz	\pm 100Hz
PLL VCO	f=440.00 RX(T, E)	Digital Multimeter	UHF Main	TP3	UHF VCO	L606	3.40V (Adjust)	3.4V \pm 0.2V
	f=410.00 RX(TE1)						2.50V (Adjust)	2.5V \pm 0.2V
	f=460.00 RX(TE2)						3.20V (Adjust)	3.2V \pm 0.2V
	f=440.00 TX(T, E)						5.50V (Check)	5.0V~6.0V
	f=410.00 TX(TE1)						4.50V (Check)	3.8V~5.2V
	f=460.00 TX(TE2)						5.30V (Check)	4.7V~6.0V

3) UHF RX Adjustment

(*): f=445.00 (T), f=435.00 (E), f=410.00 (TE1), f=460.00 (TE2)

Item	Condition	Measurement			Adjustment			Specifications
		Equipment	Unit	Terminal	Unit	Parts	Method	
Herical coil	f=435.00 (445.00)	T.G. -30dBm	Back	UHF ANT	UHF Main	TC201 TC202 L218 L219	Max Gain	430M (E) 440M 438M (T) 450M 400M (TE1) 420M 450M (TE2) 470M 
		Spectrum Analyzer	UHF	TP2				
Sensitivity	f=438.00 (T) f=440.00 (T) f=449.99 (T) f=430.00 (E) f=435.00 (E) f=439.99 (E) f=400.00 (TE1) f=410.00 (TE1) f=420.00 (TE1) f=450.00 (TE2) f=460.00 (TE2) f=470.00 (TE2) SSG OUT: -9.0dBμ	SSG Distortion Meter Oscilloscope Level Meter	Back	UHF SP1			Check	SINAD is 12dB or more.
S Meter	f=445.00 (*) SSG OUT: 18.0dBμ	SSG LCD UHF S Meter	Front panel		UHF Main	VR202	Starts lighting "Full."	
	SSG OFF						Check	Does not light.
SQL level	f=445.00 (*) SSG OFF SQL LEVEL: 1	Digital Multimeter	Main	TP5	UHF Main	VR201	2.05V (Adjust)	2.05V±0.1V The squelch is closed.
Distortion	f=445.00 (*) SSG OUT: 60.0dBμ	SSG Distortion Meter Level Meter	Back	SP1			Check	4% or below
RX S/N	f=445.00 (*) SSG OUT: 60.0dBμ	SSG Level Meter Oscilloscope	Back	SP1			Check	40dB or more
9600bps Packet Out	f=445.00 (*) SSG OUT: 20.0dBμ f=4.8kHz 2.5kHz/DEV	SSG Level Meter Oscilloscope	Back	MIC1				100mV ±50mVrms /47kΩ

4) UHF TX Adjustment

(*): f=445.00 (T), f=435.00 (E), f=410.00 (TE1), f=460.00 (TE2)

Item	Condition	Measurement			Adjustment			Specifications
		Equipment	Unit	Terminal	Unit	Parts	Method	
High Power	f=445.00 (T) f=435.00 (E) f=410.00 (TE1) f=460.00 (TE2)	Power Meter Current Meter	Back	UHF ANT	UHF Main	VR203	Max	36W or more
	VR203					35W	±1.0W 11A or below	
Low Power	f=445.00 (*)					Check	5±2W	
DEV	f=445.00 (*) AG: 1kHz -30dBm	Linear Det. Oscilloscope Power Meter AG				VR204	4.5kHz /DEV	4.5kHz ±0.2kHz /DEV
MIC Gain	f=445.00 (*) AG: 1kHz -46dBm						VR205	Adjust
CTCSS Tone Level	f=445.00 (*) AG=0 TONE SW ENC 88.5Hz	Linear Det. Oscilloscope Power Meter					Check	0.5~1.3kHz /DEV
Tone Burst Level	f=445.00 (*) AG=0 PTT+DOWN key						Check	3.0kHz ±0.5kHz /DEV
9600bps Packet IN	f=445.00 (*) AG: 4.8kHz -1dBm FUNC+VHF key	Linear Det. Oscilloscope AG					Check	2.0kHz ±0.5kHz /DEV

5) VHF PLL Adjustment

Item	Condition	Measurement			Adjustment			Specifications
		Equipment	Unit	Terminal	Unit	Parts	Method	
Reference Frequency	f=145.00 TX	Freq. Counter Power Meter	Back	VHF ANT			Check	±100Hz
PLL VCO	f=145.00 RX(T, E) f=173.99 RX(TE1, 2)	Digital Multimeter	VHF Main	TP1	VHF VCO	L505	2.80V 7.35V	±0.3V ±0.05V
	f=145.00 RX(T, E) f=173.99 RX(TE1, 2)						Check	2.8V±1.0V 7.35V±0.4V

6) VHF RX Adjustment

Item	Condition	Measurement			Adjustment			Specifications
		Equipment	Unit	Terminal	Unit	Parts	Method	
Gain	f=145.00 (T,E) f=165.00 (TE1) f=165.00 (TE2)	SSG Distortion Meter Oscilloscope Level Meter	Back	VHF SP1	VHF Main	L14 L15 L16 L17	Adjust the SSG output level around 0dBμ, and turn L14~L17 to make the wave form max.	SINAD is 12dB or more.
Sensitivity	f=144.00 (T) f=147.99 (T) f=144.00 (E) f=145.99 (E) f=150.00 (TE1,2) f=162.00 (TE1,2) f=173.99 (TE1,2) SSG OUT: -9.0dBμ	SSG Distortion Meter Oscilloscope Level Meter	Back	VHF SP1	VHF Main	L14~ L17	Adjust the SINAD sensitivity and wave form to the best.	SINAD is 12dB or more.
	f=136.00 SSG OUT: 0dBμ						Check	SINAD is 12dB or more.
S Meter	f=145.00 (T,E) f=165.00 (TE1,2) SSG OUT: 18dBμ	SSG LCD VHF S Meter	Front Panel		VHF Main	VR1	Starts lighting "Full."	
	SSG OFF						Check	Does not light.
SQL level	f=145.00 (T,E) f=165.00 (TE1,2) SSG OFF SQL Level 1	Digital Multimeter	VHF Main	TP4	VHF Main	VR2	2.05V (Adjust)	2.05V±0.1V The squelch is closed.


7) VHF TX Adjustment

(frequency) = TE1, TE2


Item	Condition	Measurement			Adjustment			Specifications	
		Equipment	Unit	Terminal	Unit	Parts	Method		
High Power	f=145.00 (165.00)	Power Meter Current Meter	Back	VHF ANT	VHF Main	VR4	Max	55W or more (T,E) 45W or more (TE1,TE2)	
	f=144.00 (150.00) f=145.99 (173.99)						VR4	52W (T,E) 35W (TE1,TE2)	±1.0W 11A or below
	f=173.99 (136.00)						Check	48~55W 7A (T,E) 32~40W 11A (TE1,TE2)	Power is output.
	Low Power						f=145.00 (160.00)	Check	3~7W
DEV	f=145.00 (160.00) AG: 1kHz -30dBm	Linear Det. Oscilloscope Power Meter	Back	VHF ANT	VHF Main	VR3	4.5kHz /DEV	4.5kHz ±0.2kHz /DEV	
MIC Gain	f=145.00 (160.00) AG: 1kHz -46dBm						Check	4.0 kHz ±0.3kHz /DEV	
CTCSS Tone Level	f=145.00 (160.00) AG=0 TONE SW ENC 88.5Hz						0.5~1.3kHz /DEV		
Tone Burst Level	f=145.00 (160.00) PTT+DOWN key						3.0kHz ±0.5kHz /DEV		
9600bps Packet IN	f=445.00 (*) AG: 4.8kHz -1dBm FUNC+VHF key						Check	2.0kHz ±0.5kHz /DEV	
X-BAND Repeater	f=145.00 f=445.00 (T) f=145.00 f=430.00 (E) f=160.00 f=410.00 (TE1) f=160.00 f=460.00 (TE2) XBR ON (VHF+PWR ON)						Check	3.5kHz ±0.5kHz /DEV	

8) Adjustment Points


VHF Main Unit

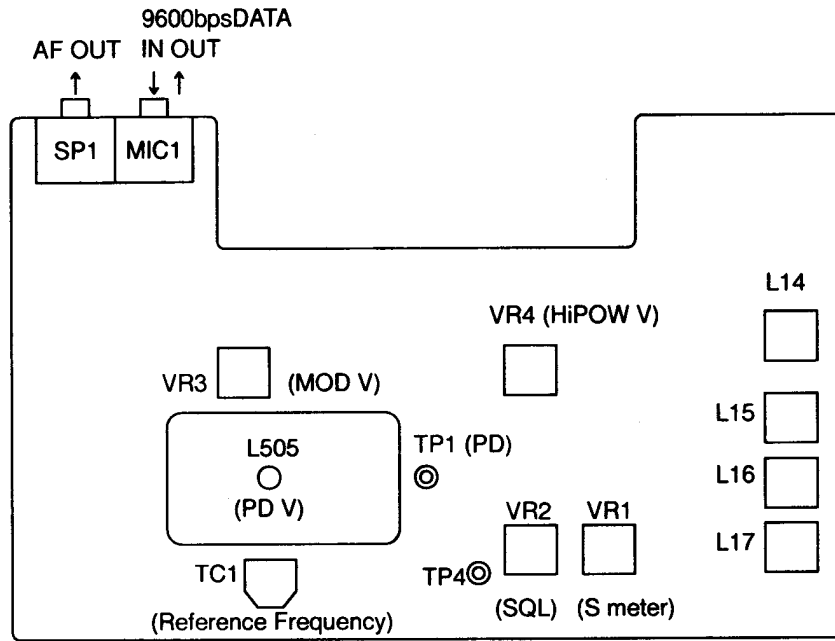


UHF Main Unit

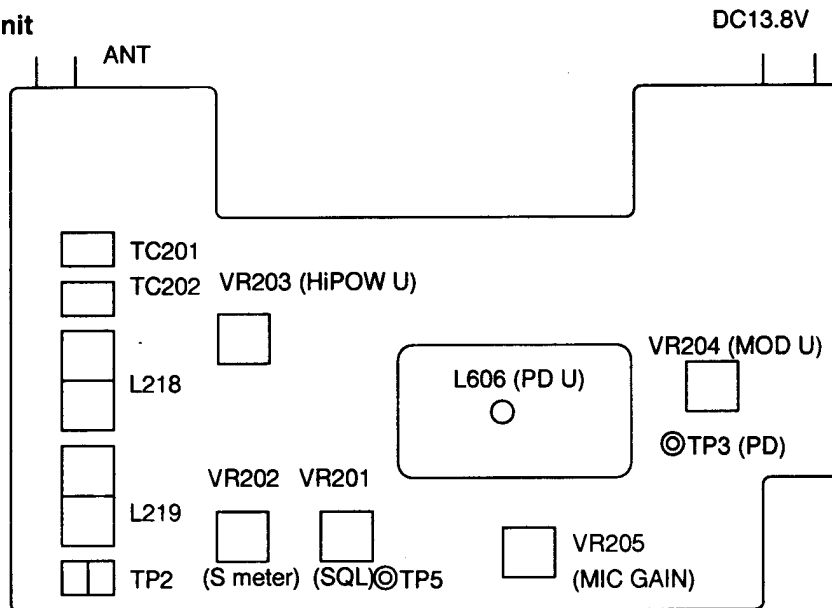


3) UHF Main Unit Side A

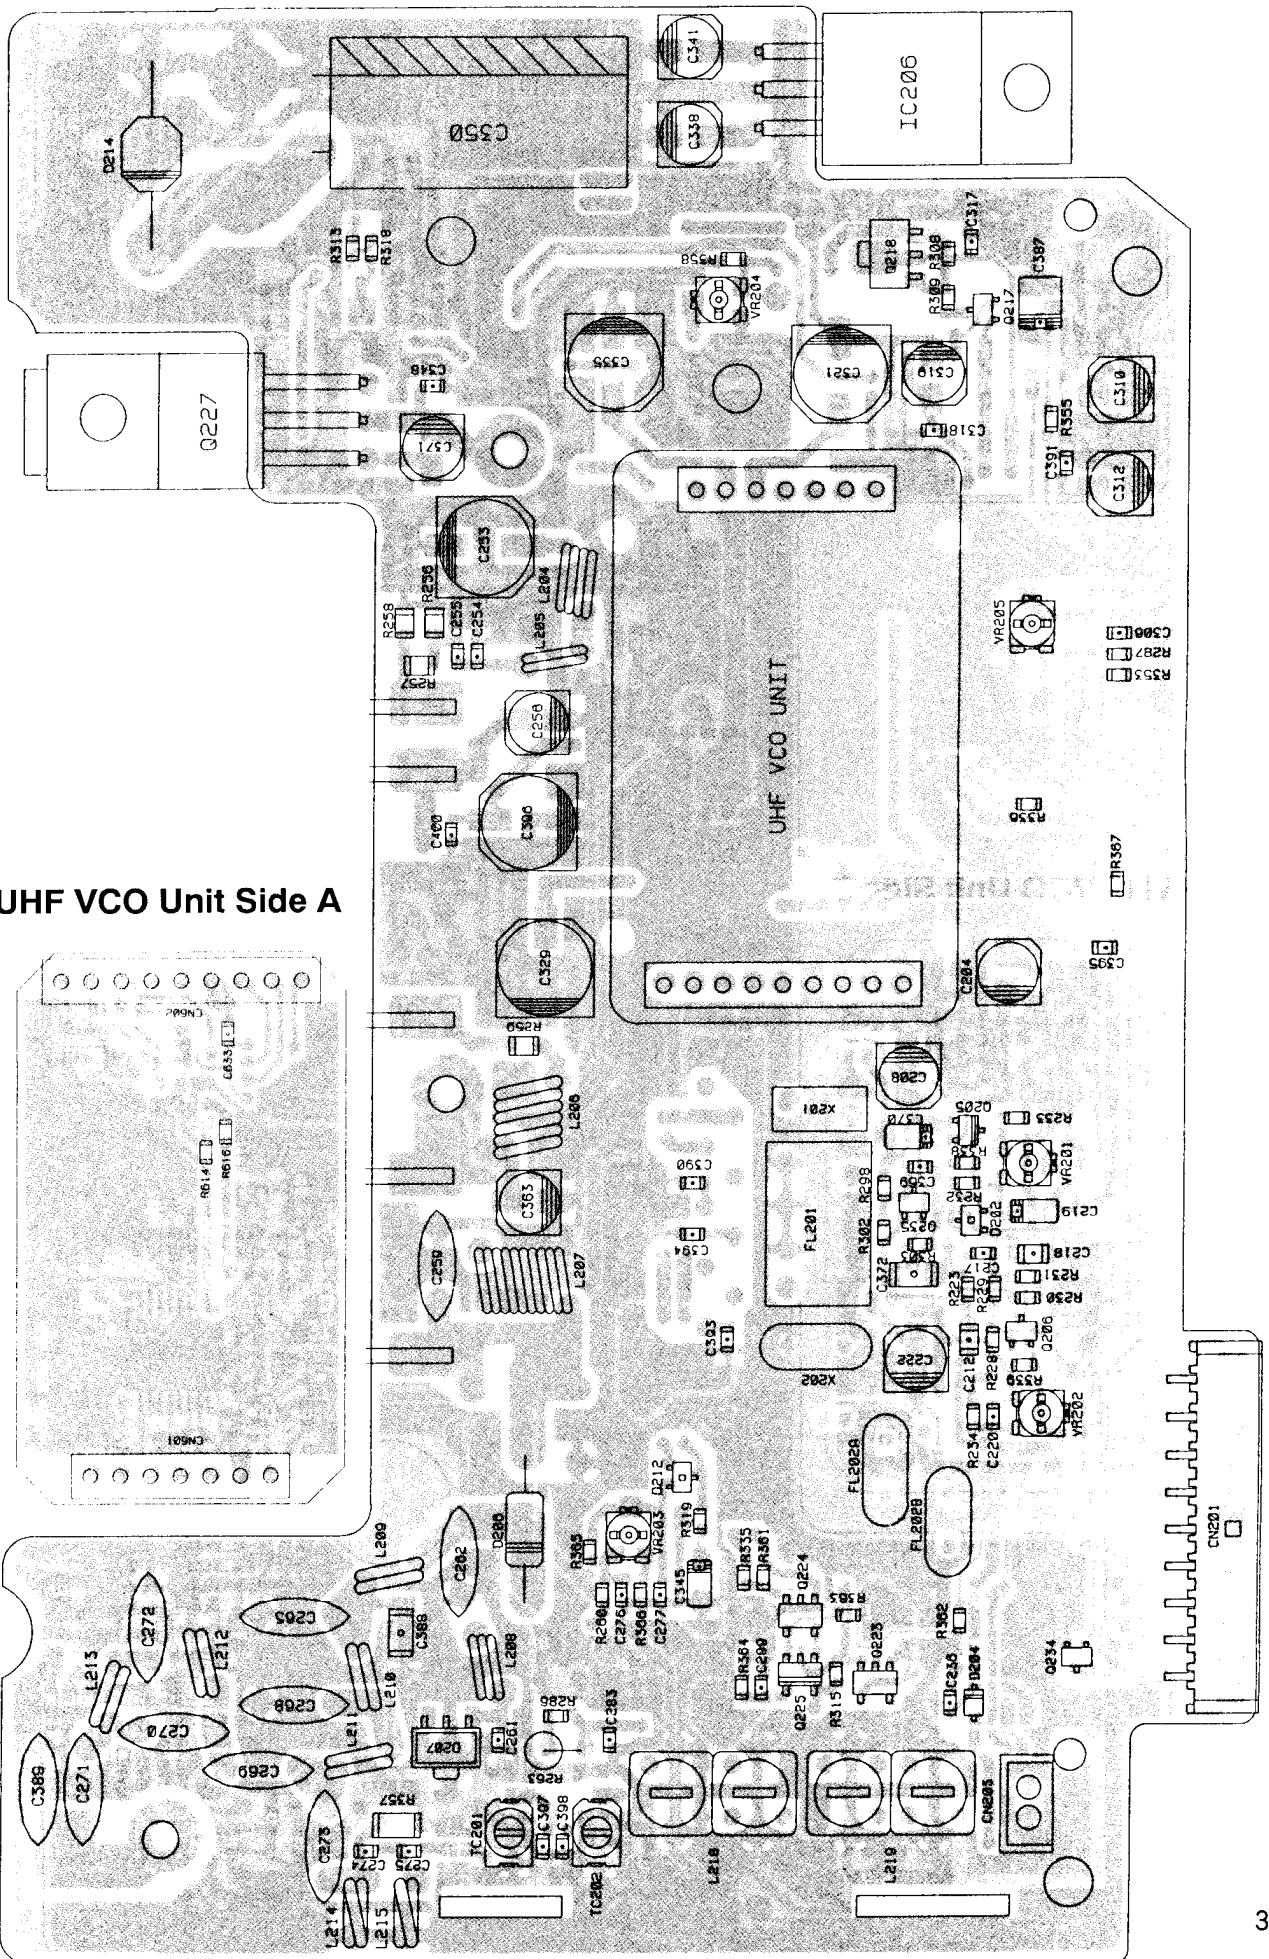


4) UHF VCO Unit Side A

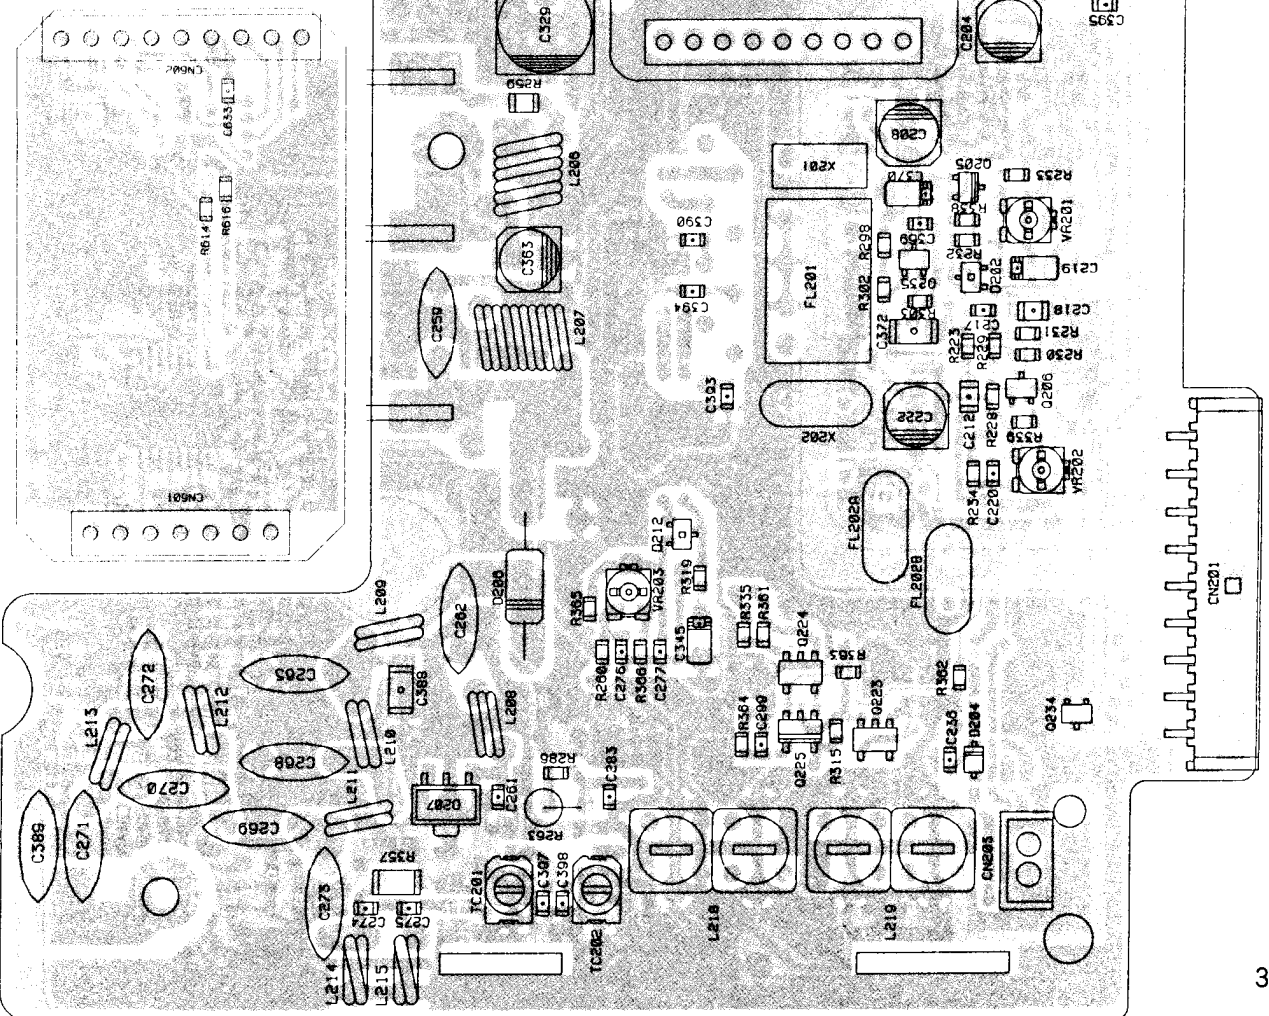


5) VHF Main Unit Side B

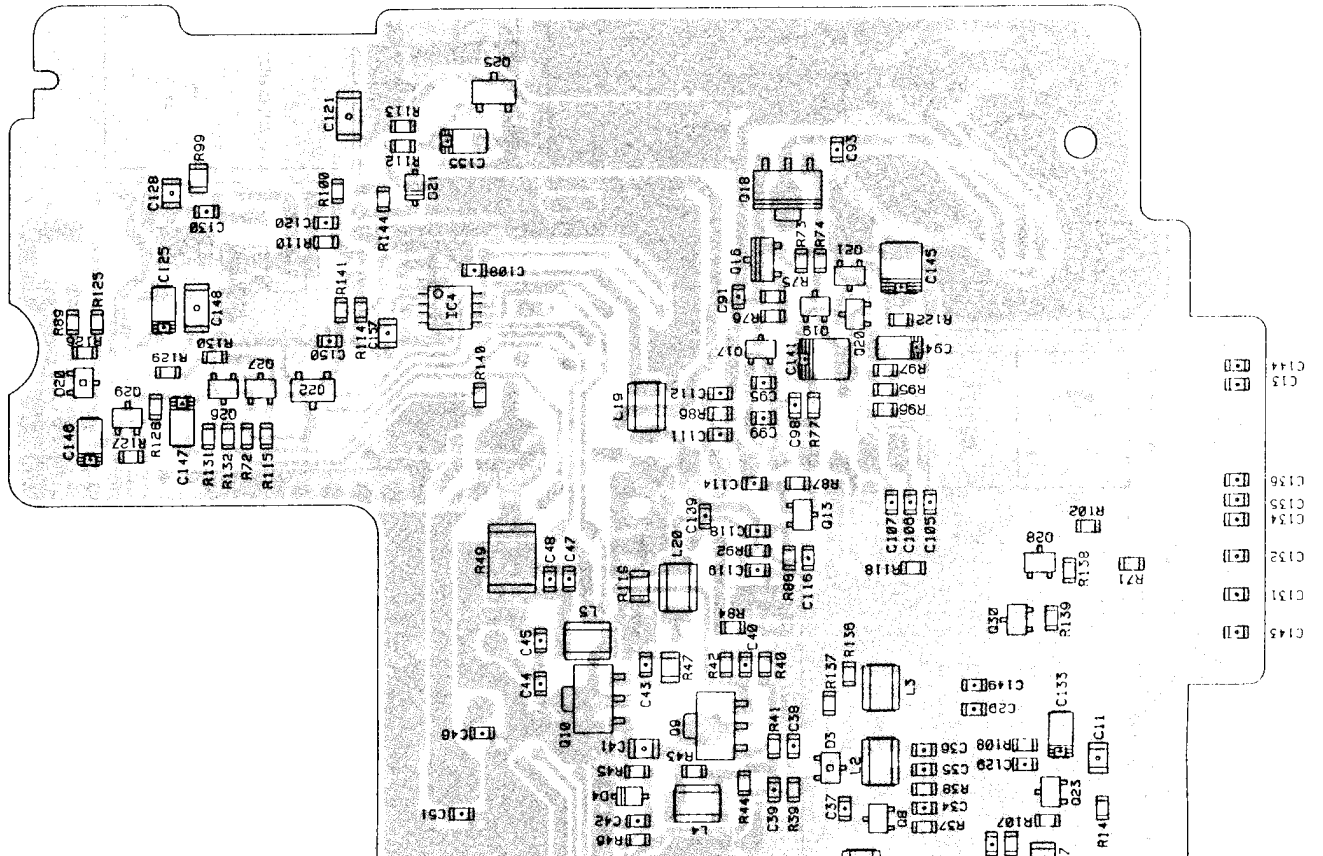


6) VHF VCO Unit Side B

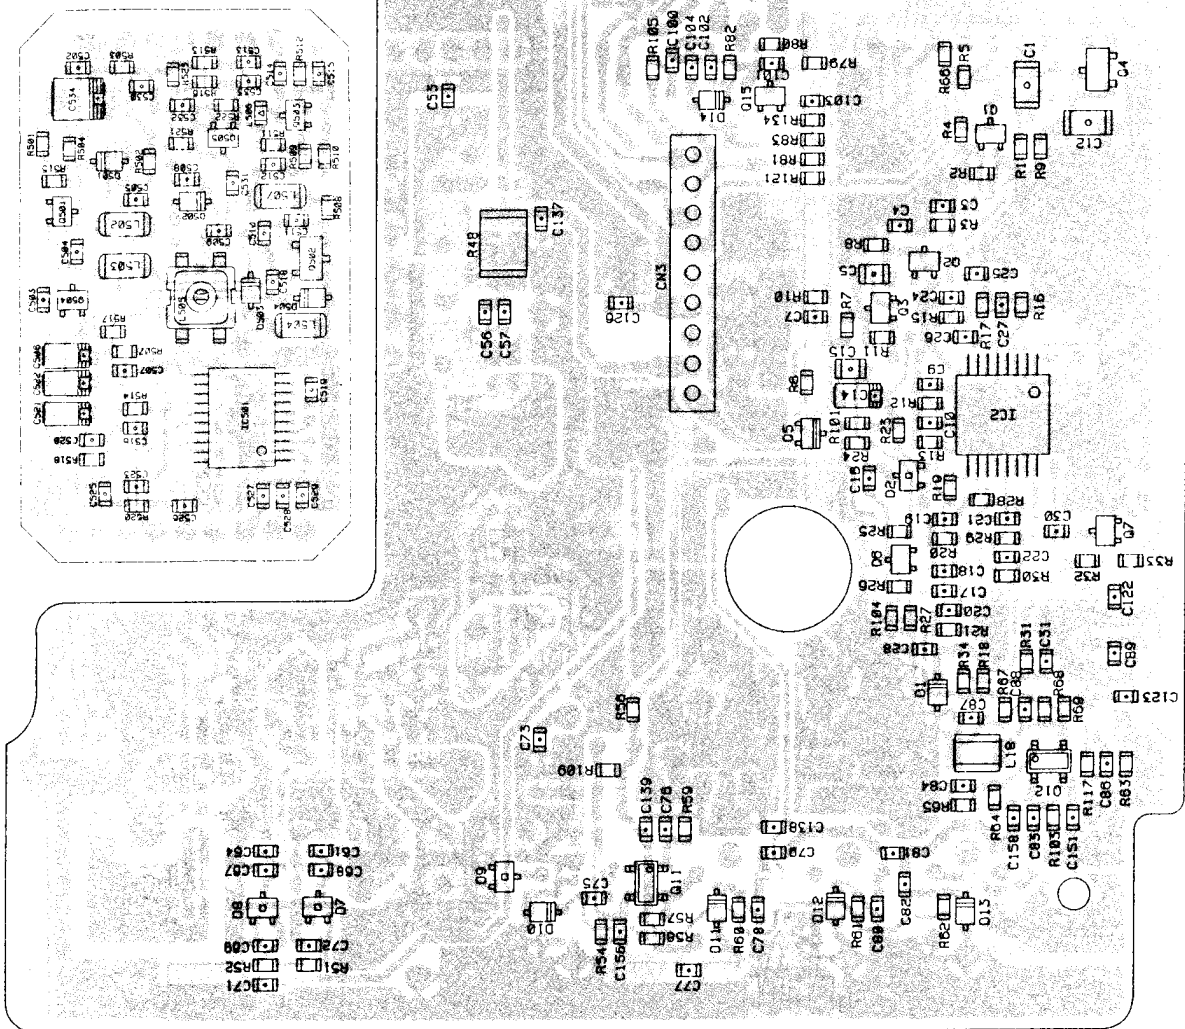


9) Front Unit Side A

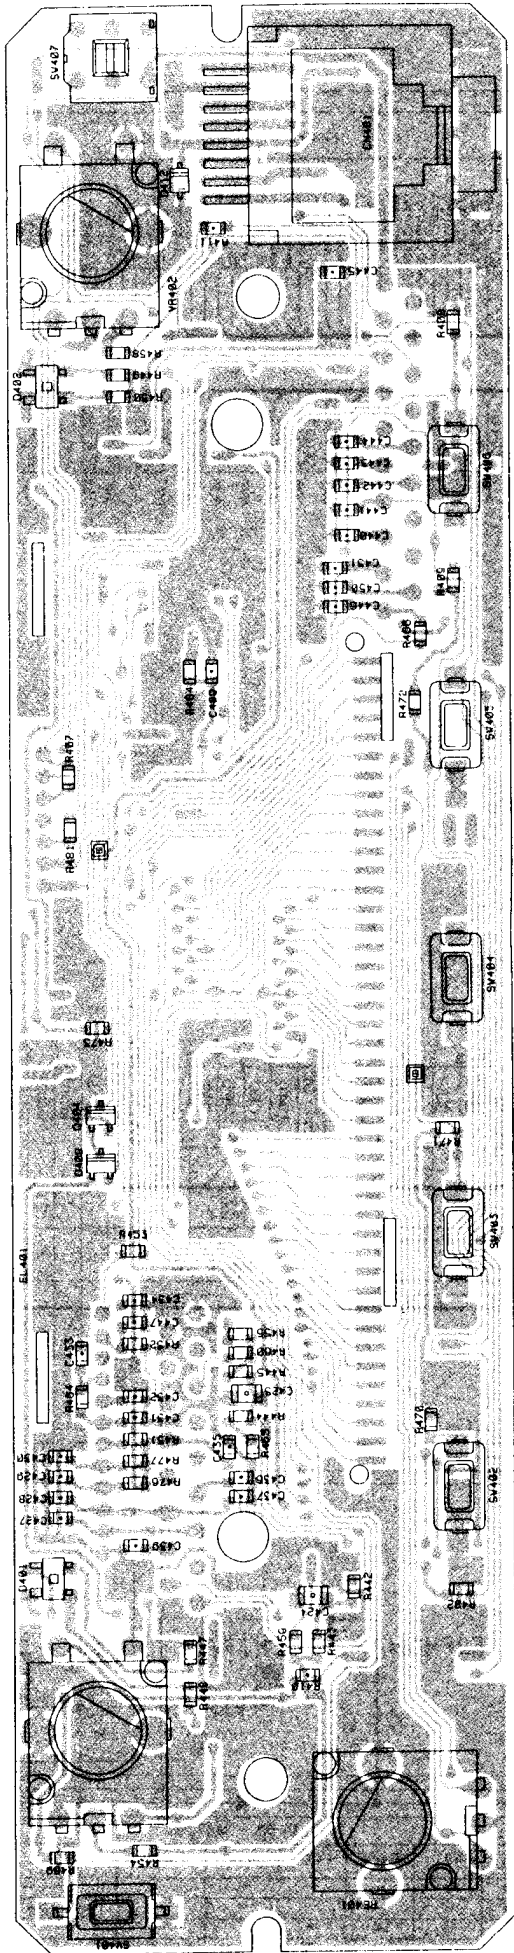


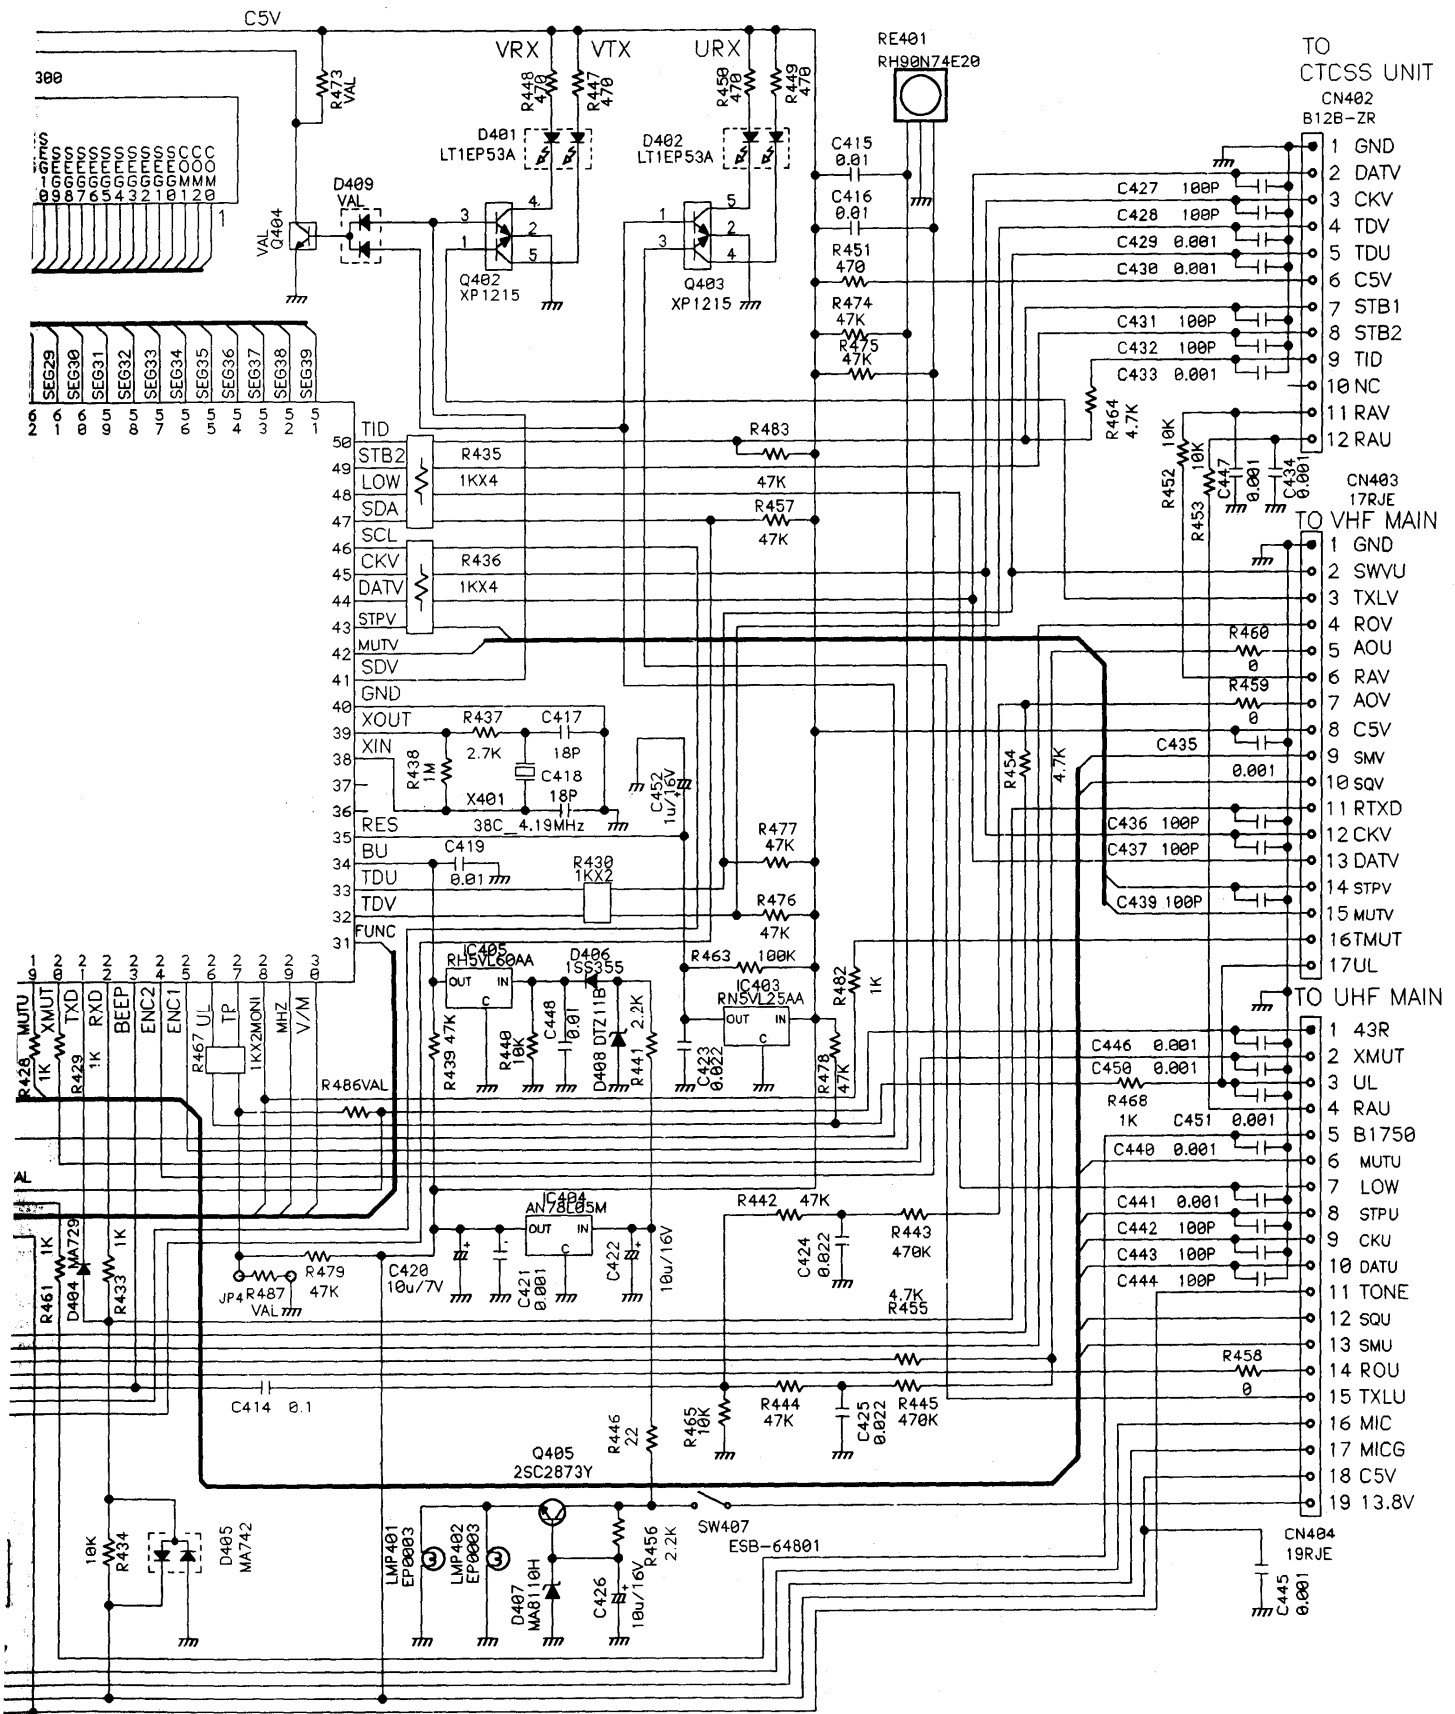

D489	JP1	JP2	JP3	JP4	R406	R432
-	-	-	-	-	100	1K
-	MA729	-	-	R487(0)	100	1K
-	-	-	-	-	100	1K
DAN202U	-	MPAL05AA	MPAL05AA	MFLC04AA	220	22K

2) VHF Main Unit T/E

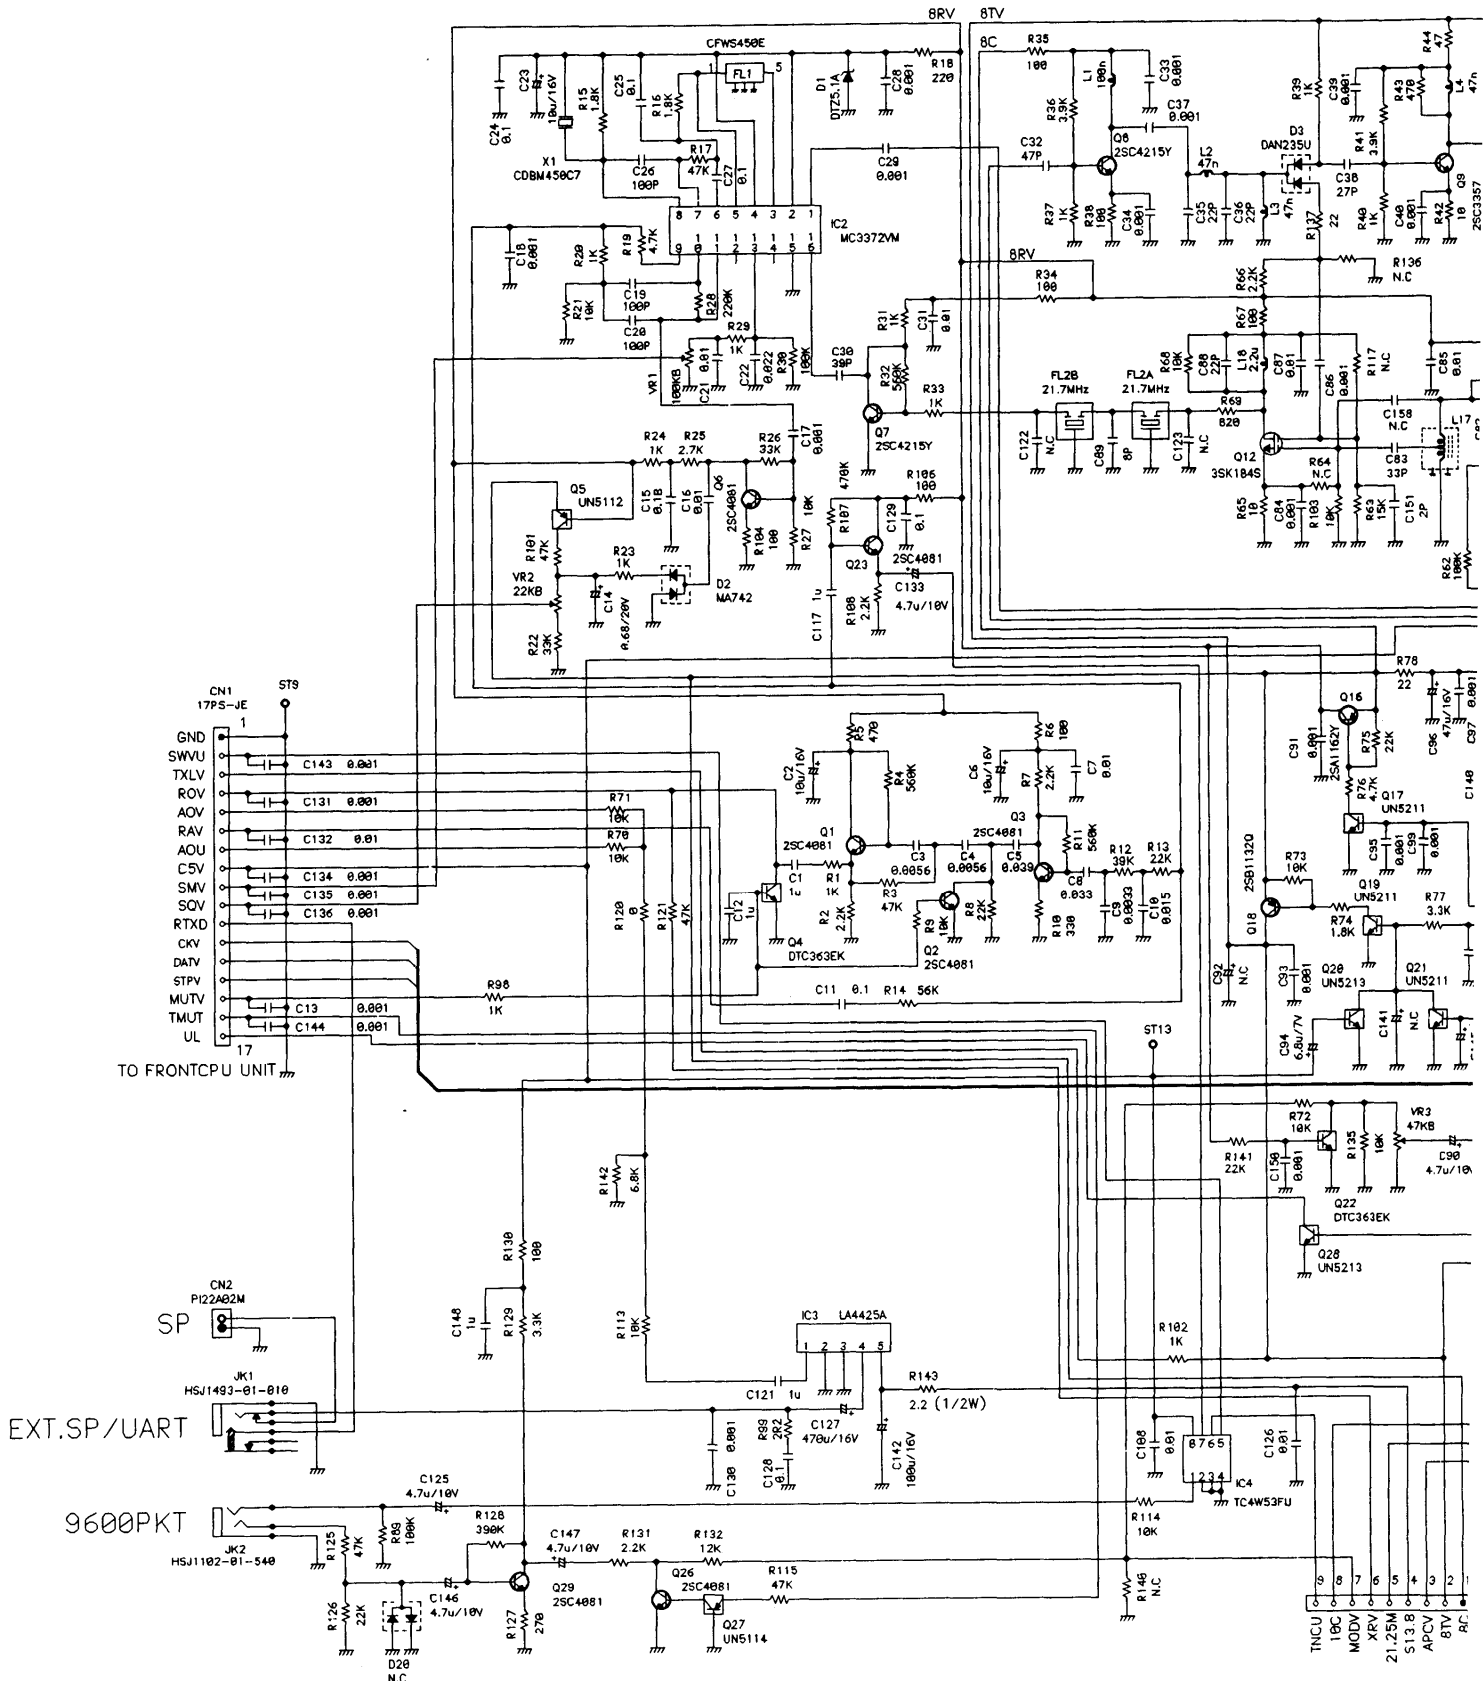


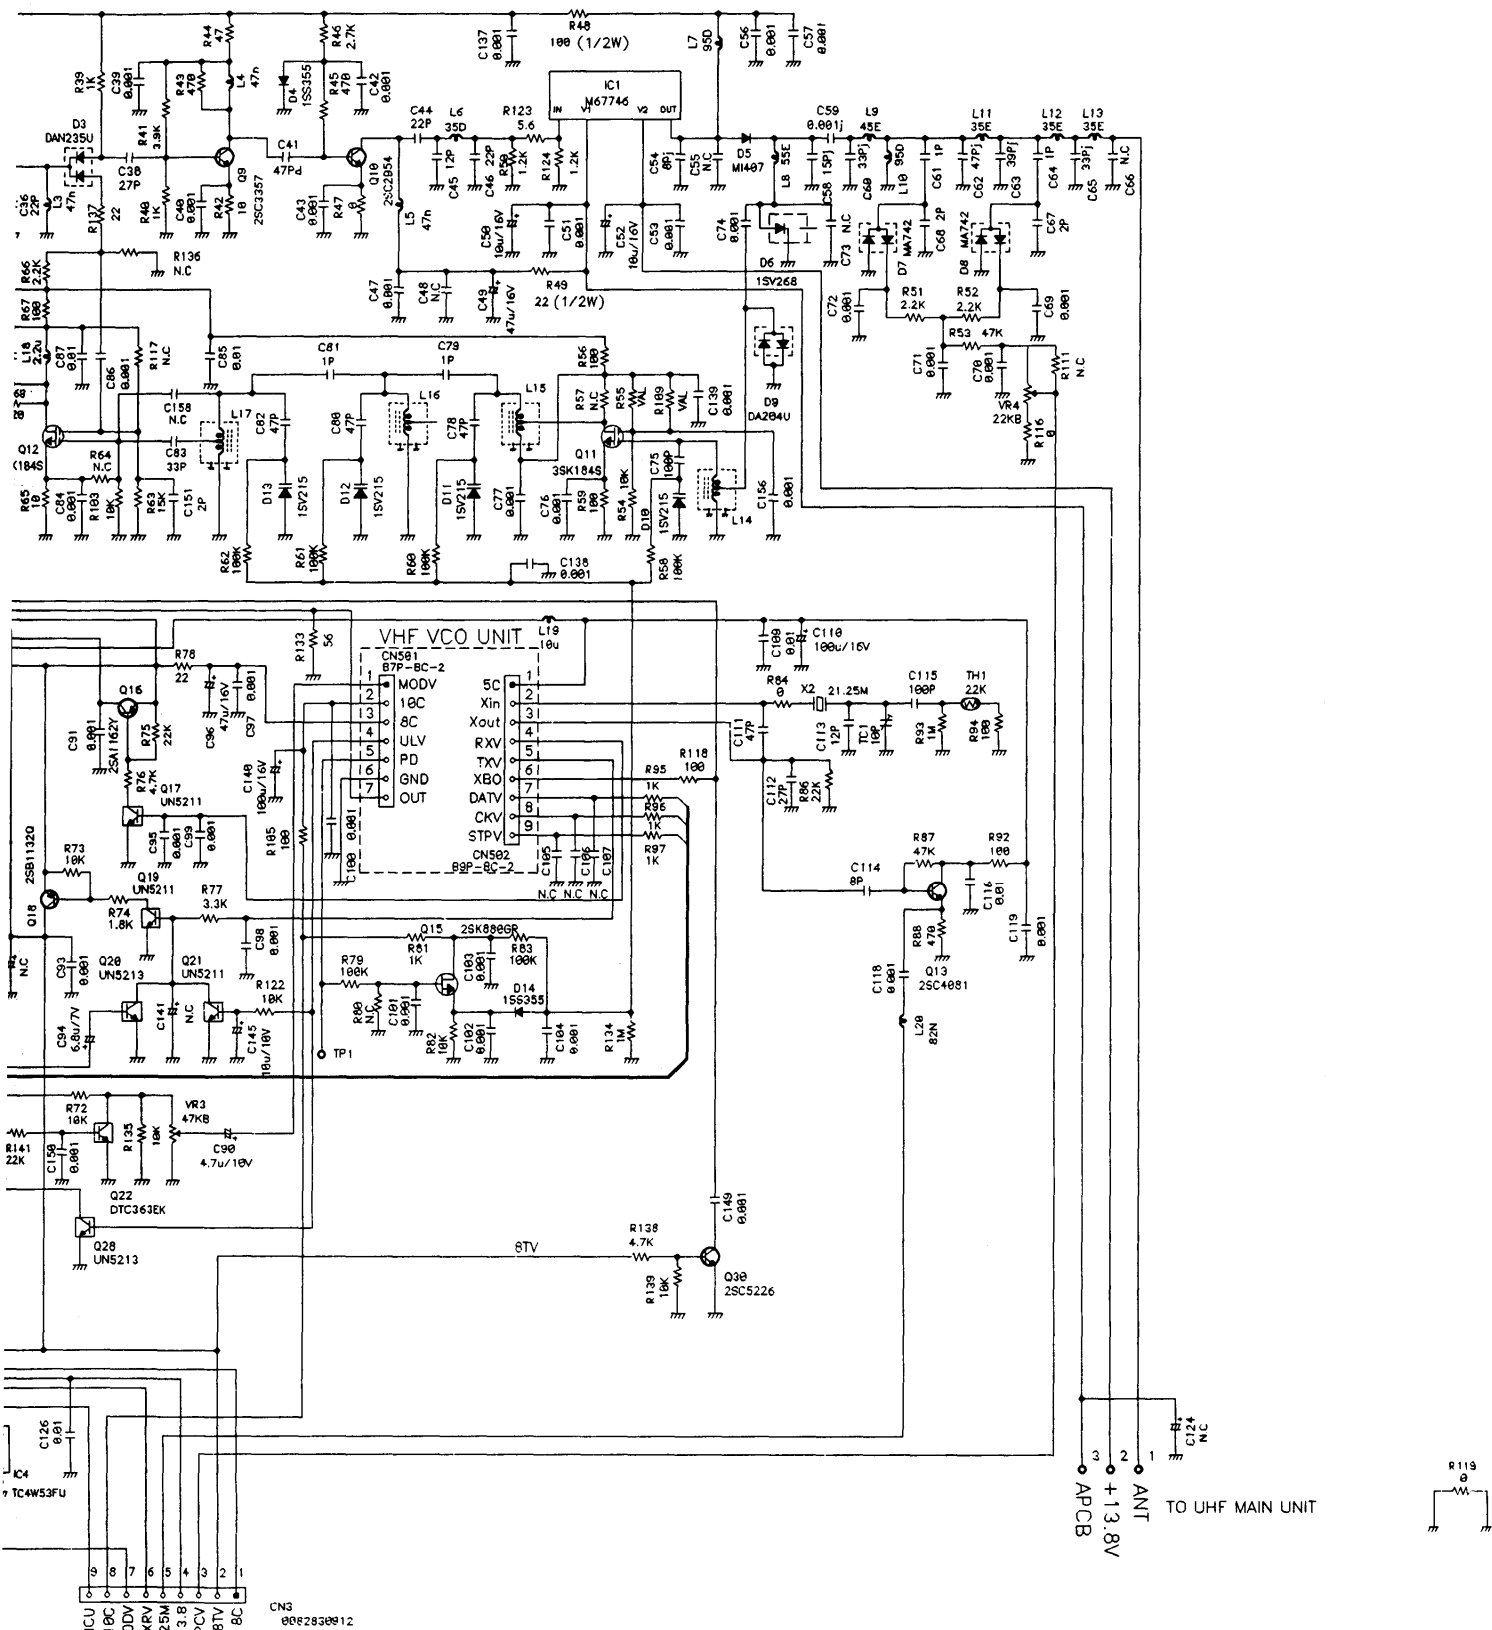



TO UHF MAIN UNIT


TO UHF MAIN UNIT

3) VHF Main Unit TE1/TE2

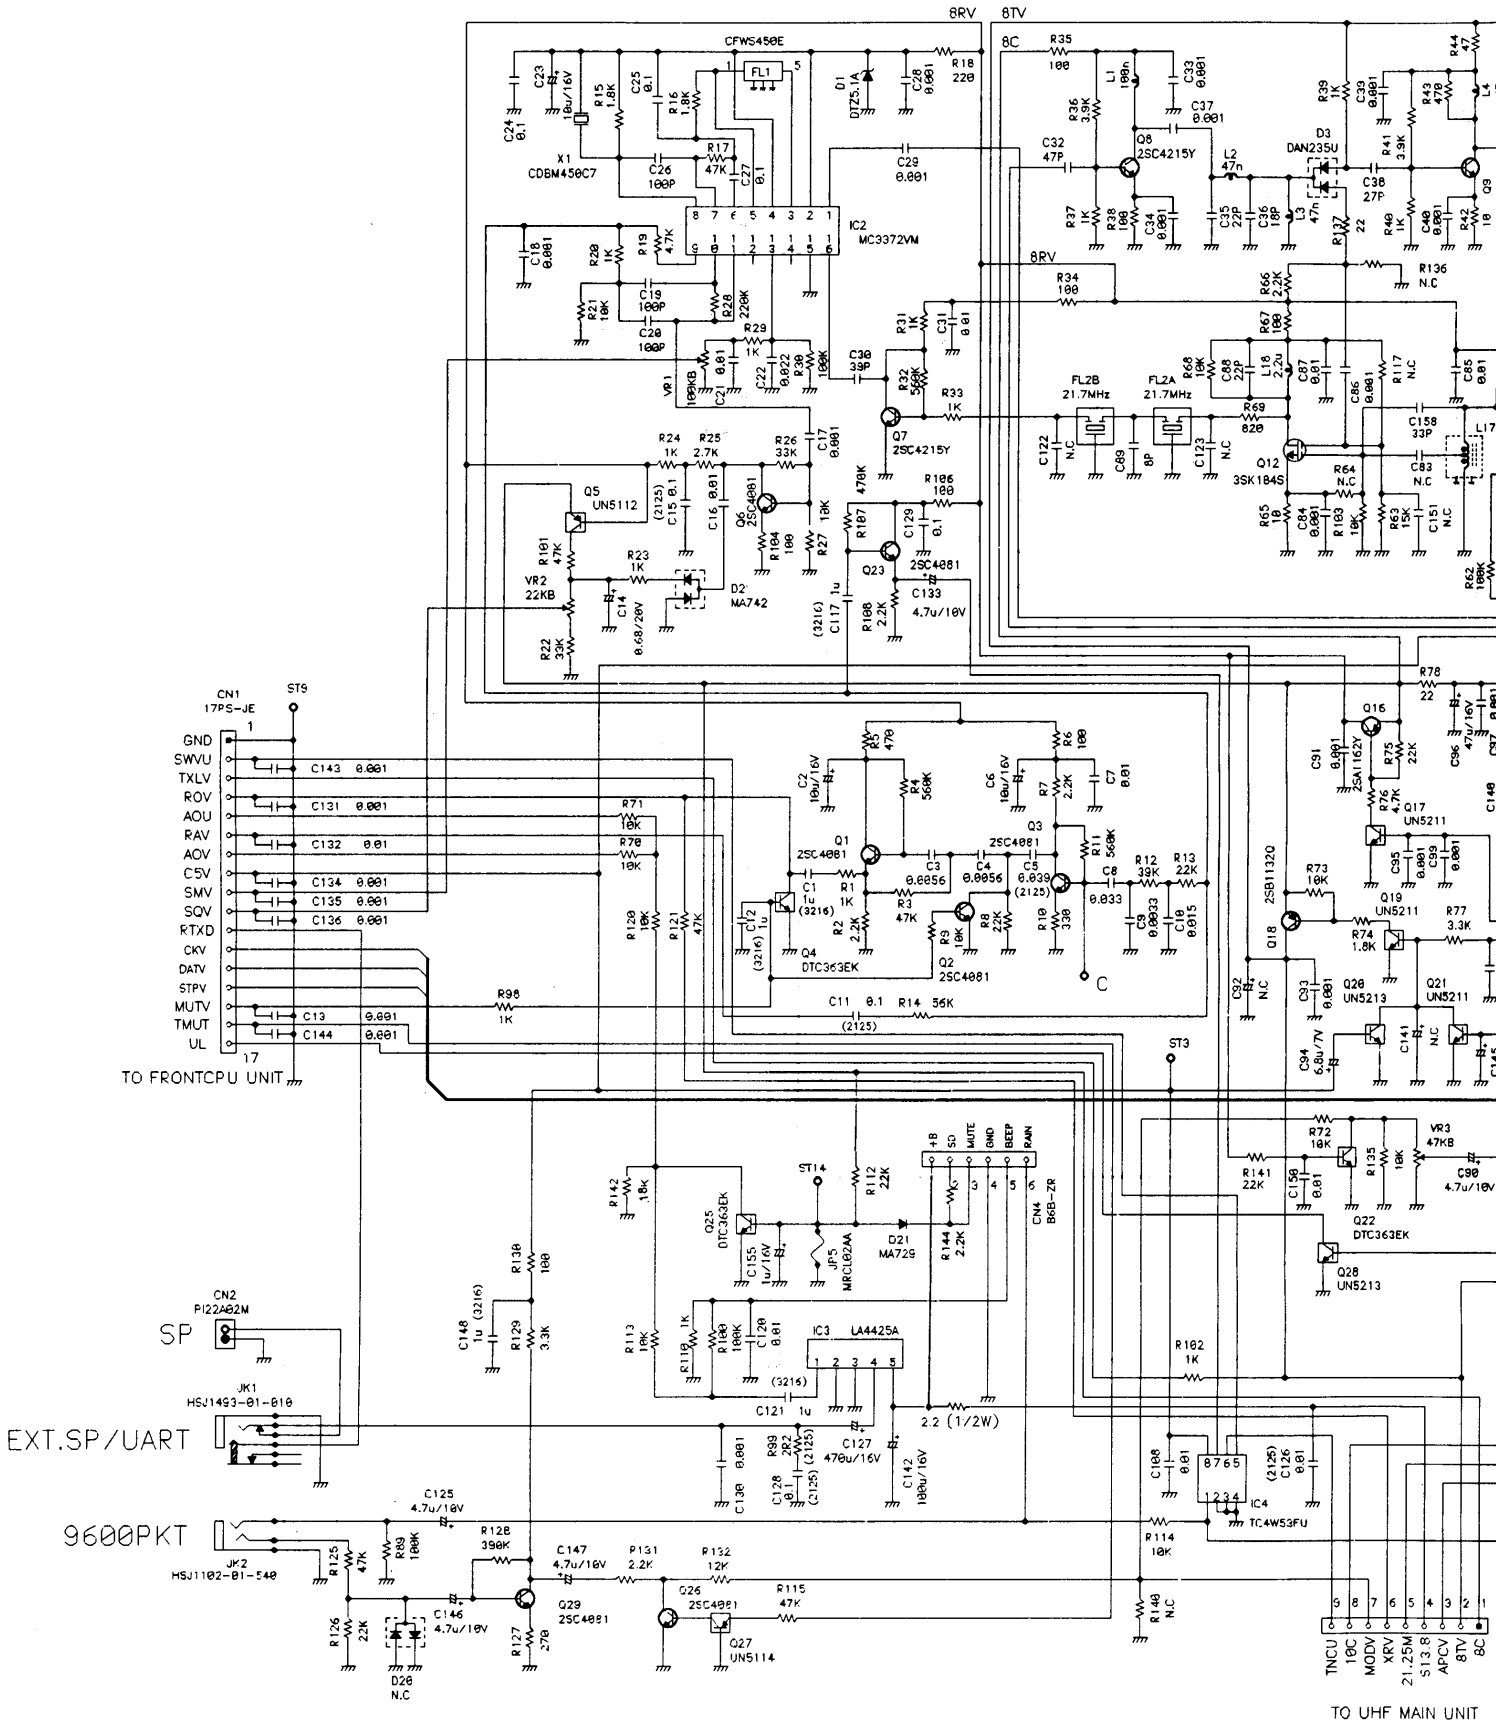


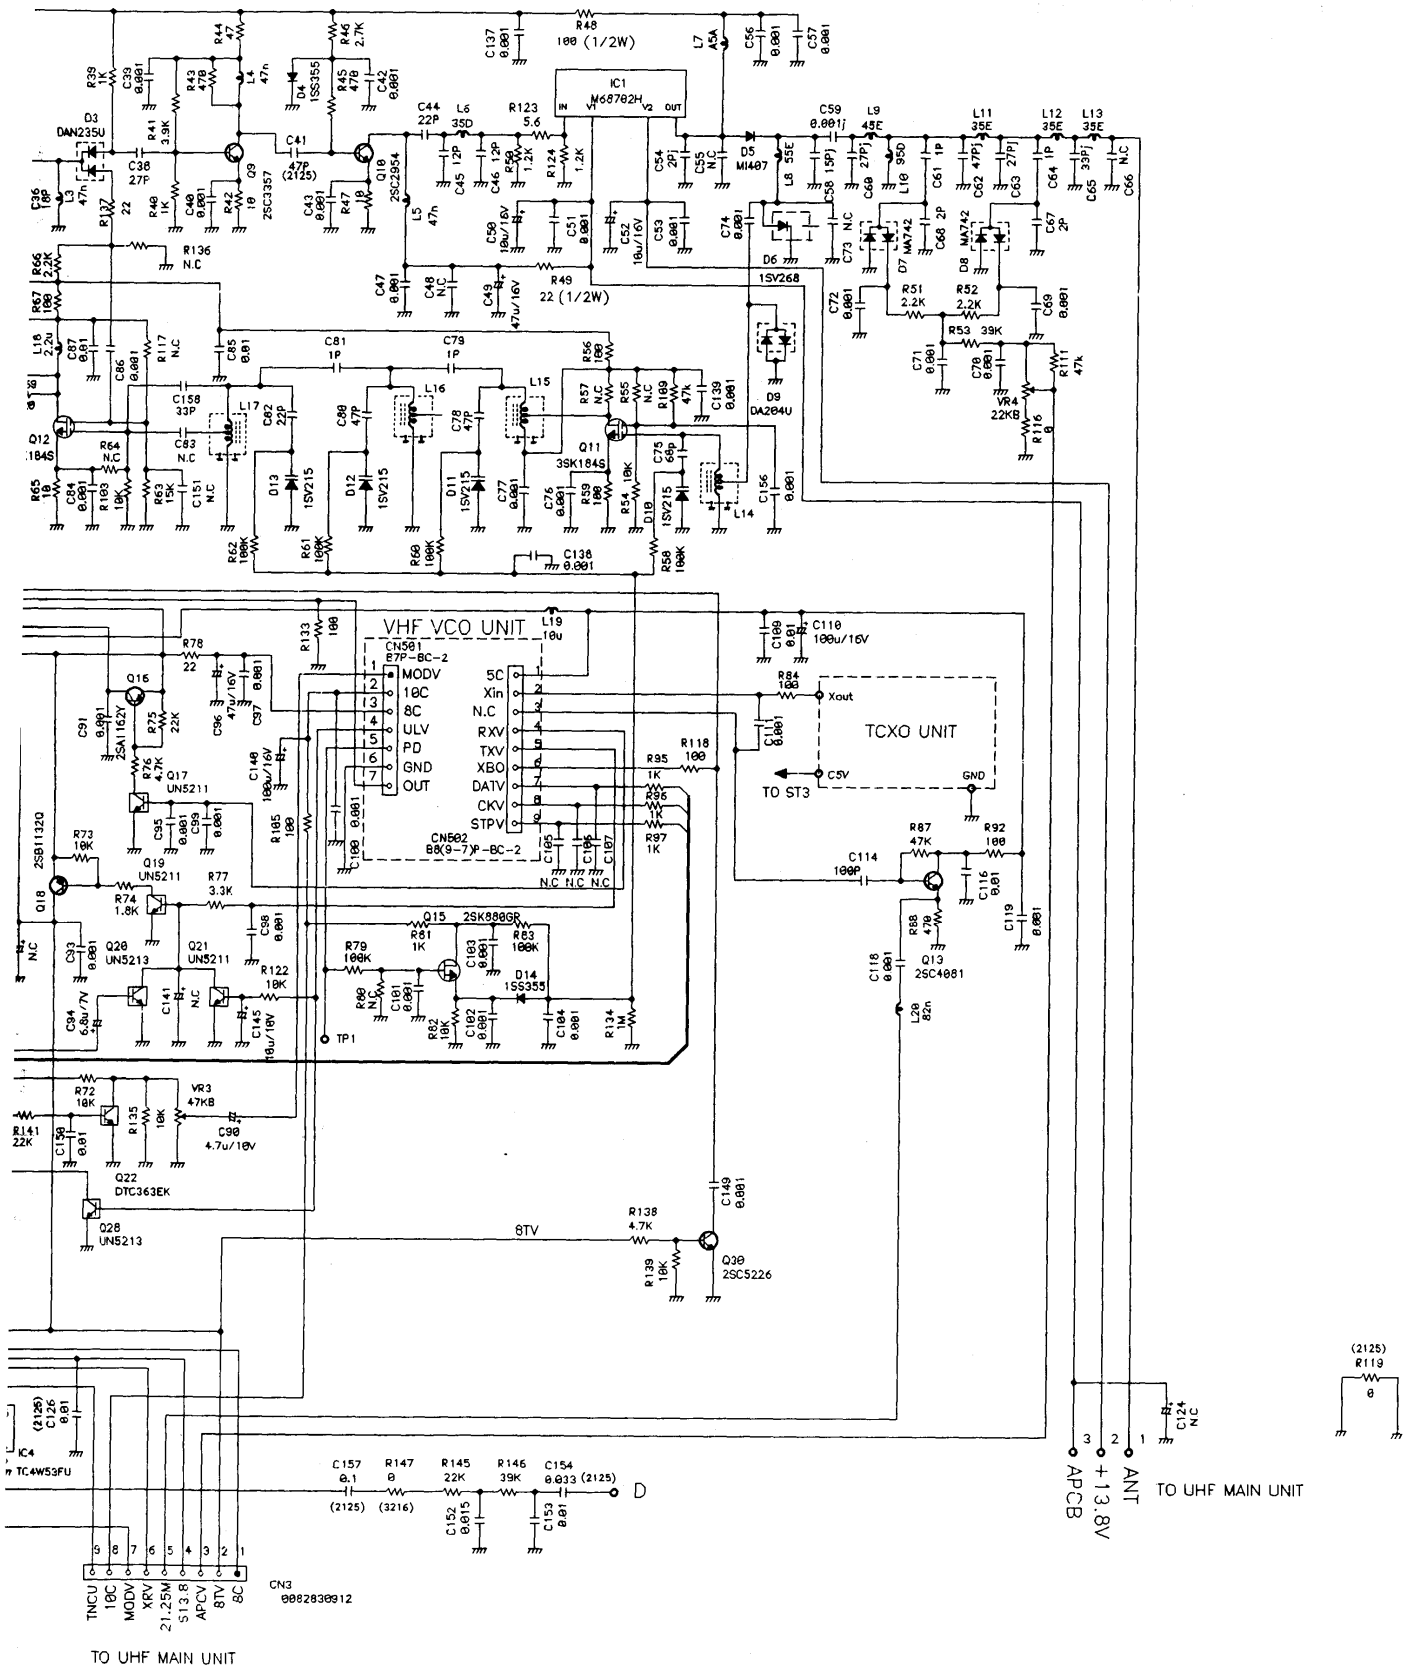

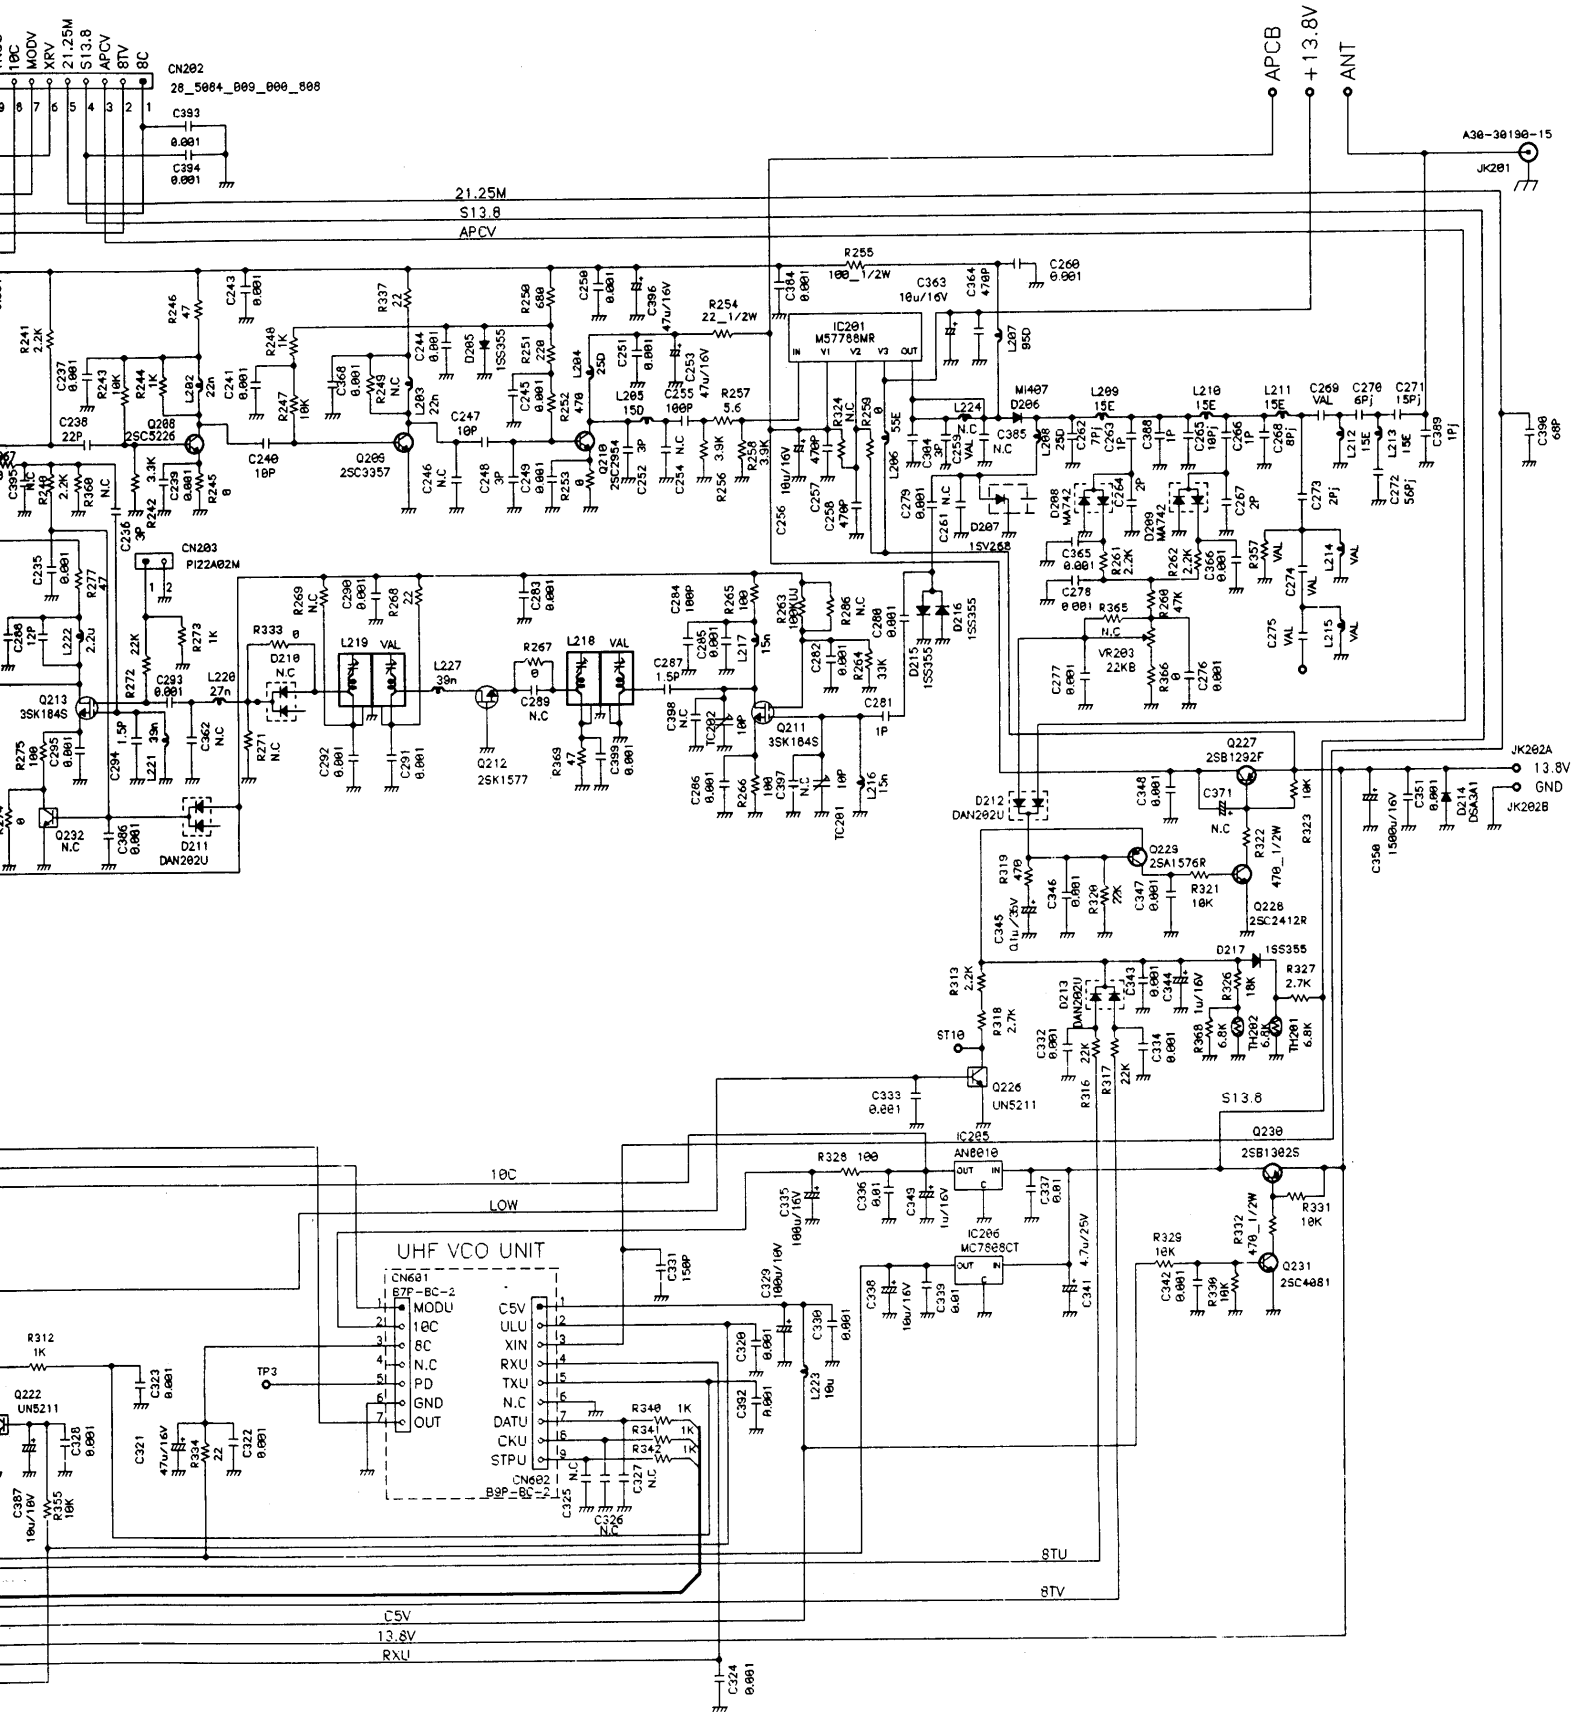

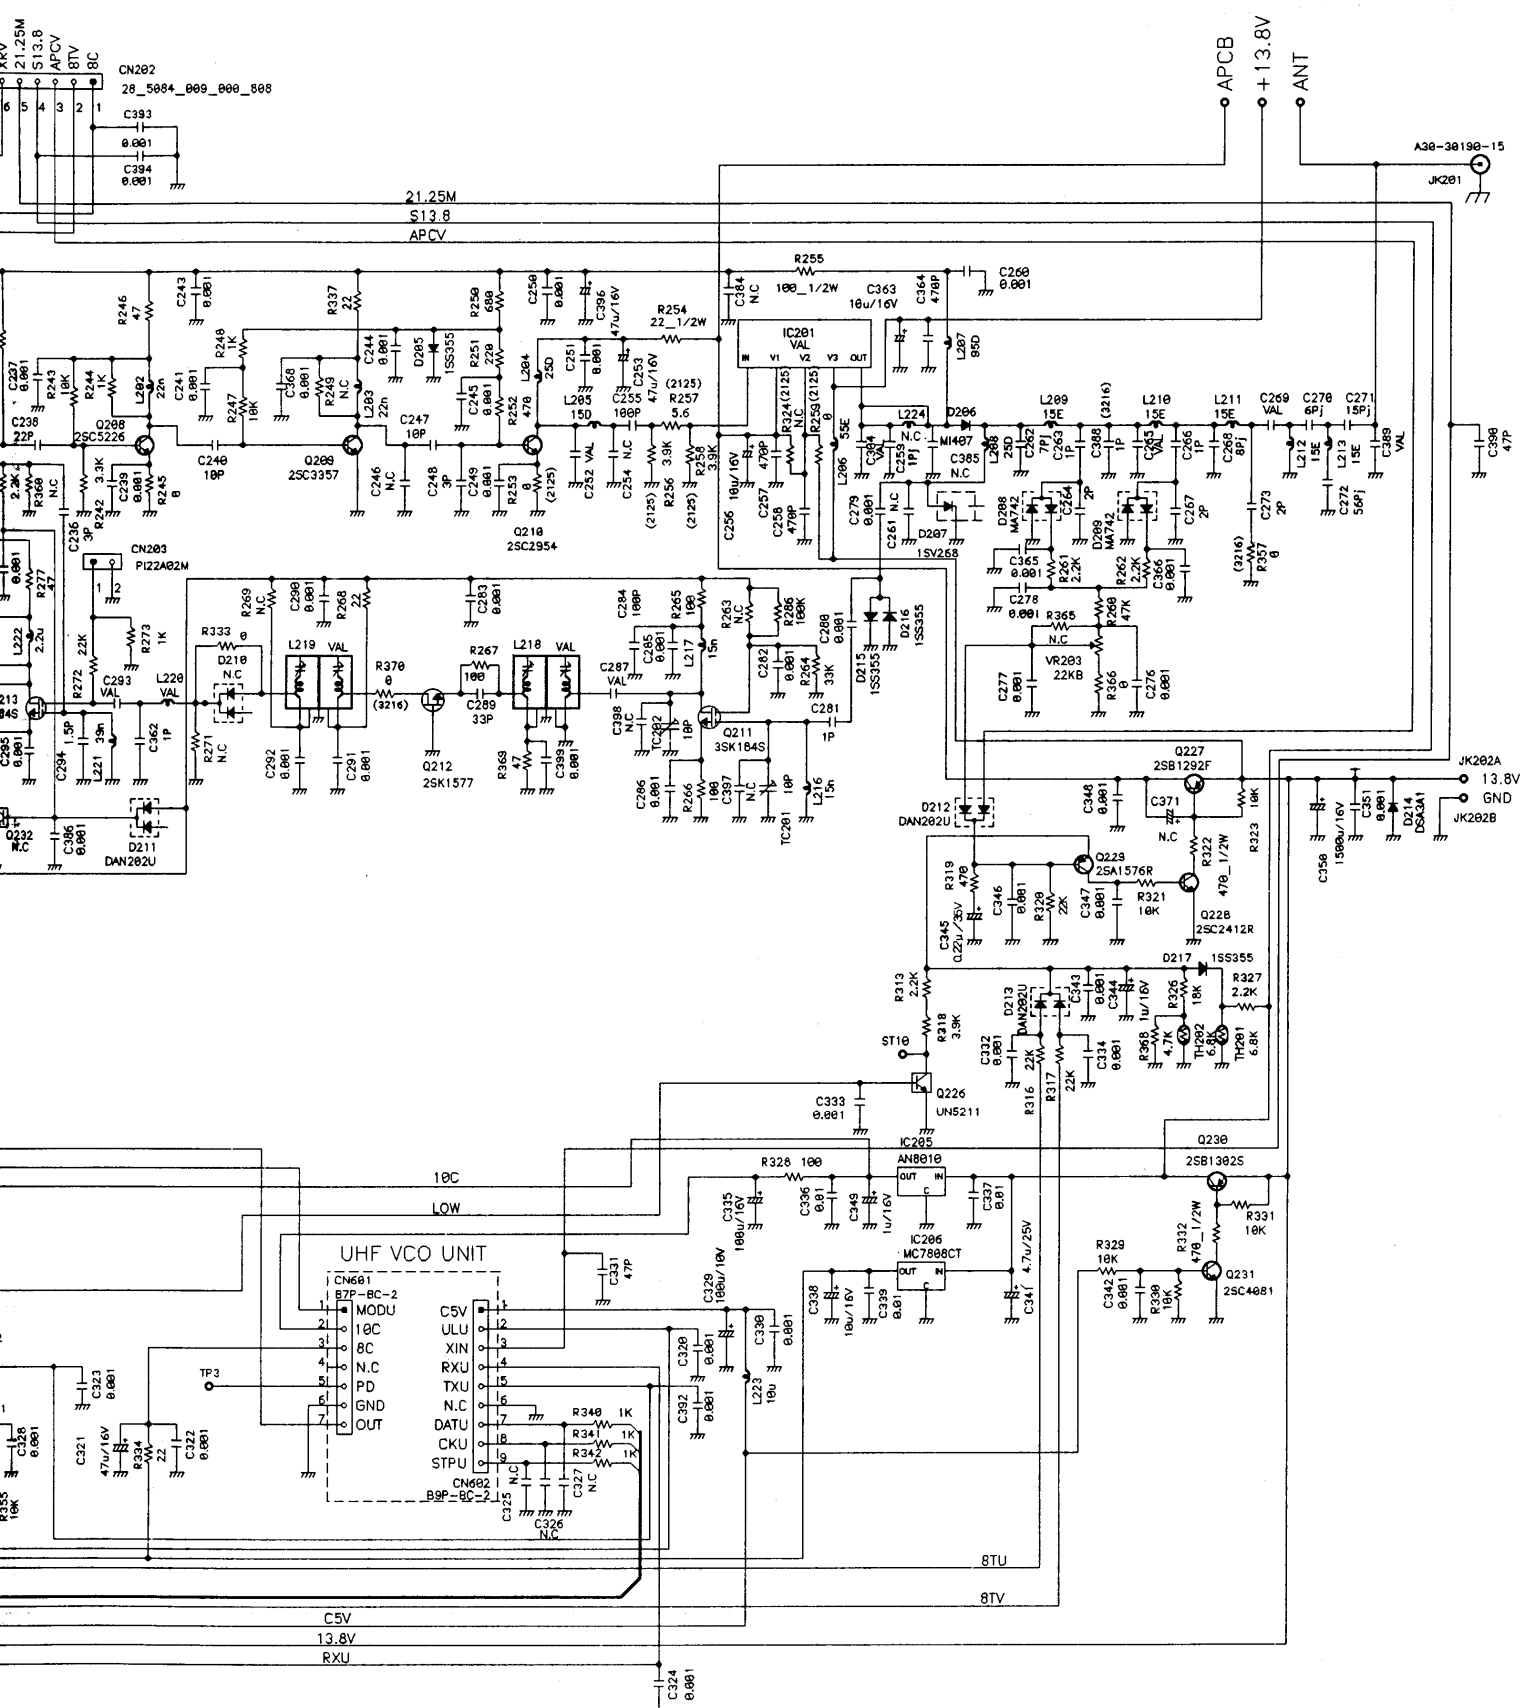


6) VHF PLL-VCO Unit

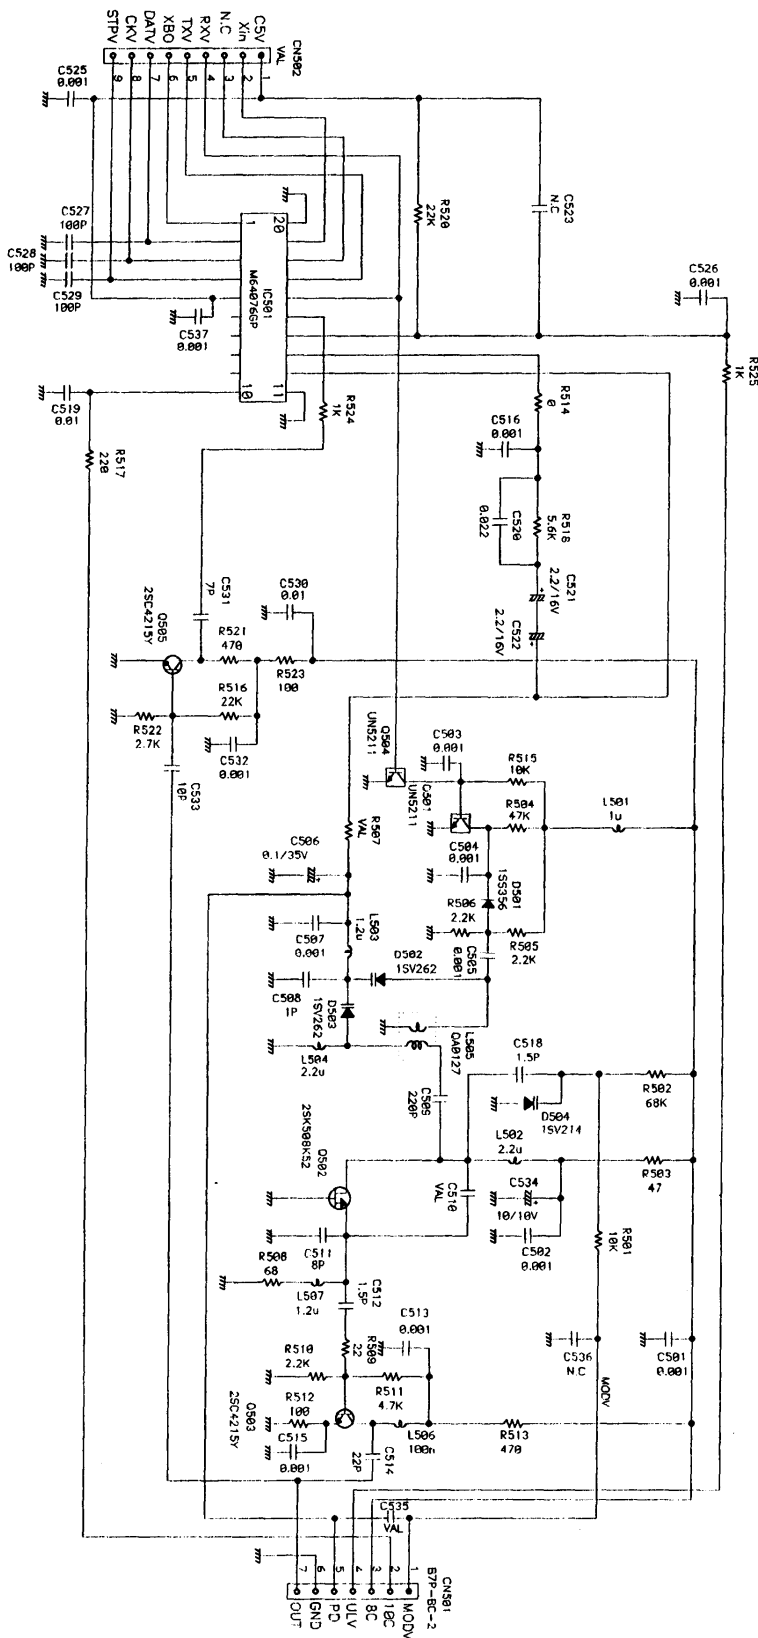


	C510	CN502	R507	C535
TE1,TE2	8P	B8(9-7)P-BC-2	15K	0.001
T,E	10P	B9P-BC-2	22K	-

7) UHF PLL- VCO Unit

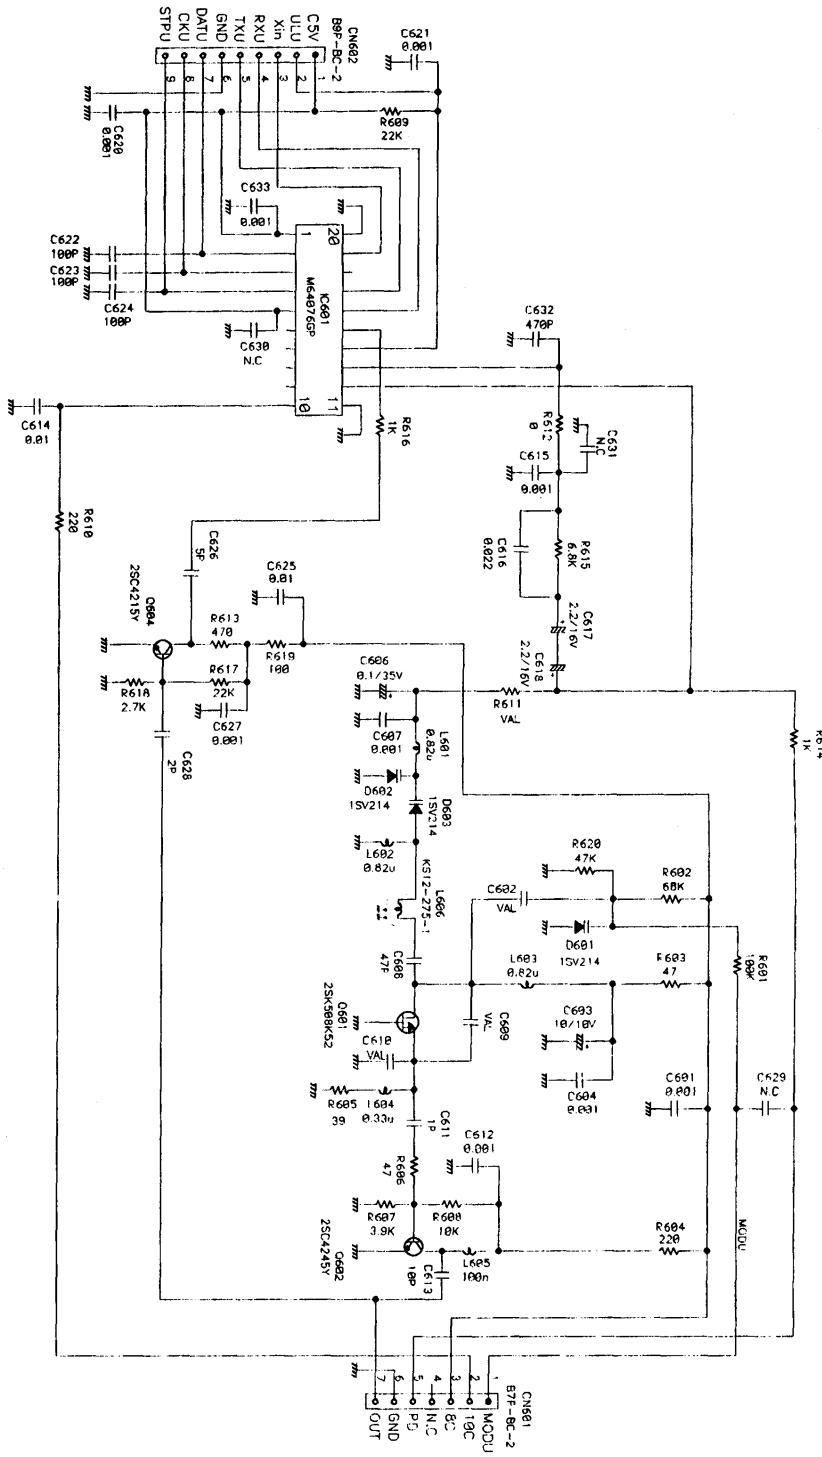

	C602	C609	R611
TE1	2P	8P	18K
TE2	1.5P	5P	18K
T.E	2P	7P	22K

8) TCXO Unit (TE1/TE2 only)

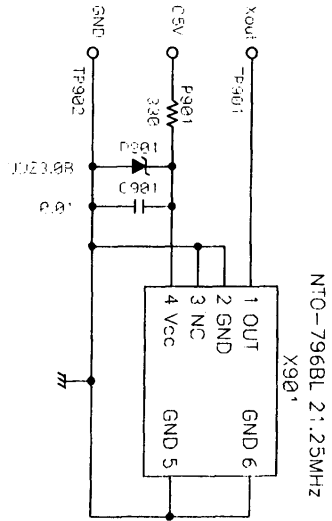

BLOCK DIAGRAM

