

Technical Manual



JBL2118H/J

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm (H) / 16 ohm (J)
- Power Capacity: 200W Continuous Program
- Frequency Range: 70 Hz to 7 kHz
- Sensitivity: 97 dB SPL*
- Crossover Frequencies: N/A

SYSTEM COMPONENTS:

- Cabinet: N/A
- Grille: N/A
- Mid Range Transducer: 200mm (8 in.) Cone Transducer (2118H/J)
- DC Resistance: 5.3 ohm ±10% Copper Wire (H)
10.7 ohm ±10% Copper Wire (J)

AURAL SWEEP TEST SPECIFICATIONS:

A. L.F. Aural Sweep Test: 7.0V Input, 20 Hz to 1.2 kHz

PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 229mm x 229mm x 103mm D
(9.0 x 9.0 x 4.06 in. D)
- Shipping Weight: 9-3/8 lbs. (4.3 kg)

WARRANTY INFORMATION:


- Refer to the Warranty Statement packed with each product.

*1 Watt (2.83 V RMS) @ 1 Meter (H)

*1 Watt (4.0 V RMS) @ 1 Meter (J)



PACKAGE

Warranty 59660
Specification Sheet 63873
Under Pad

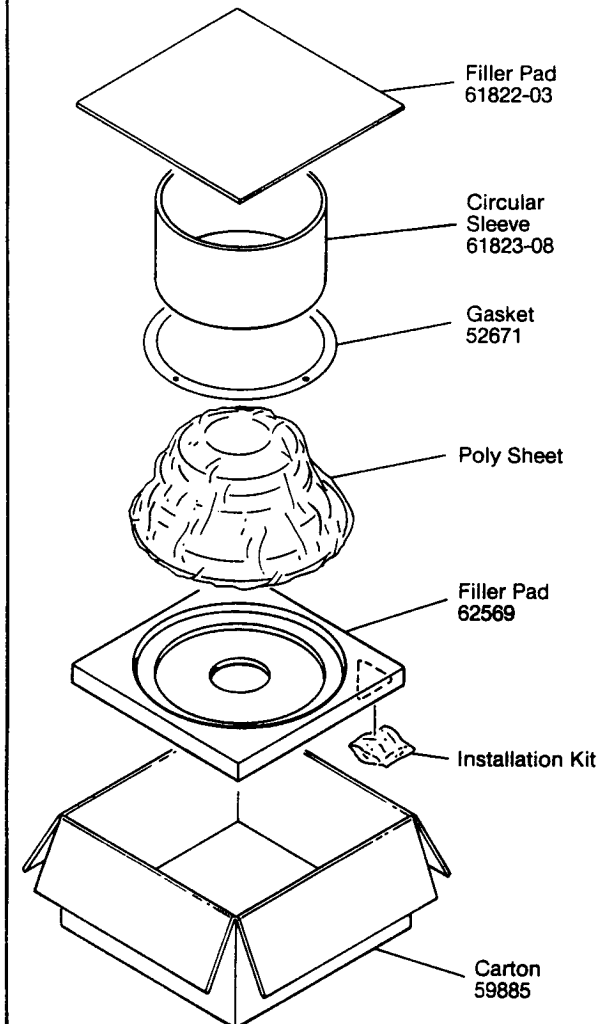

COMPONENT VIEW

Speaker, Low Freq
2118H/J
Cone Repl
C8R2118 (H)
C16R2118 (J)

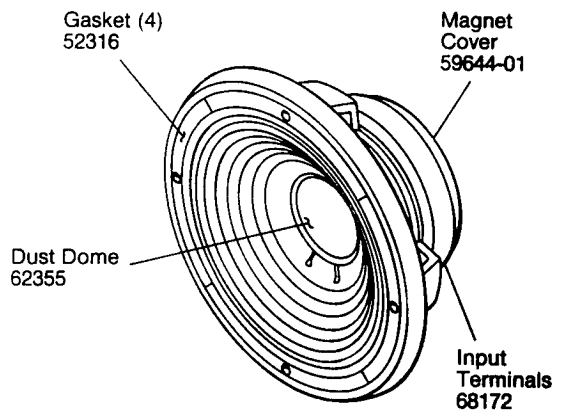



Installation Kit
T-Nut (4)
No. 10-32
Screw (4)
No. 10-32 x 1-1/2
FIL HD BLK

NOTE: POSITIVE VOLTAGE TO BLACK TERMINAL
GIVES FORWARD DIAPHRAGM MOTION.

JBL2118H/J

MECHANICAL DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JBL. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS SHALL BE IN INCHES. DIMENSIONS IN PARENTHESES ARE IN MILLIMETERS. THIS DRAWING IS NOT TO BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

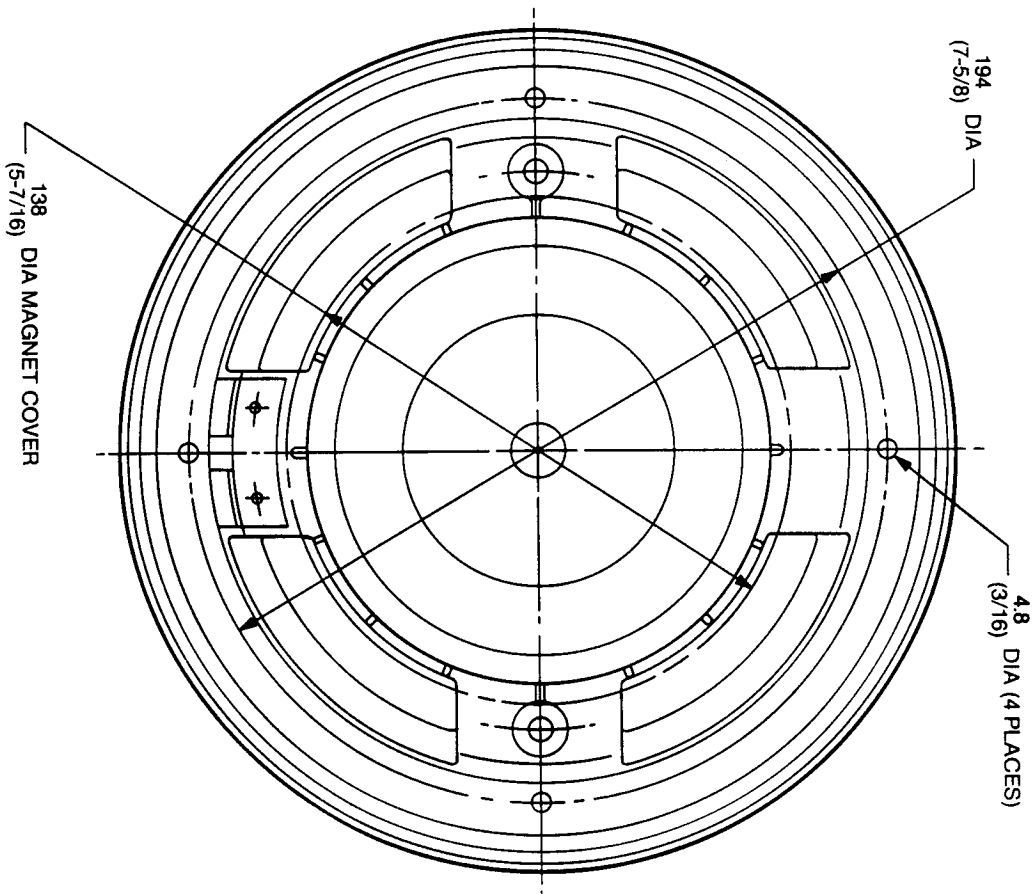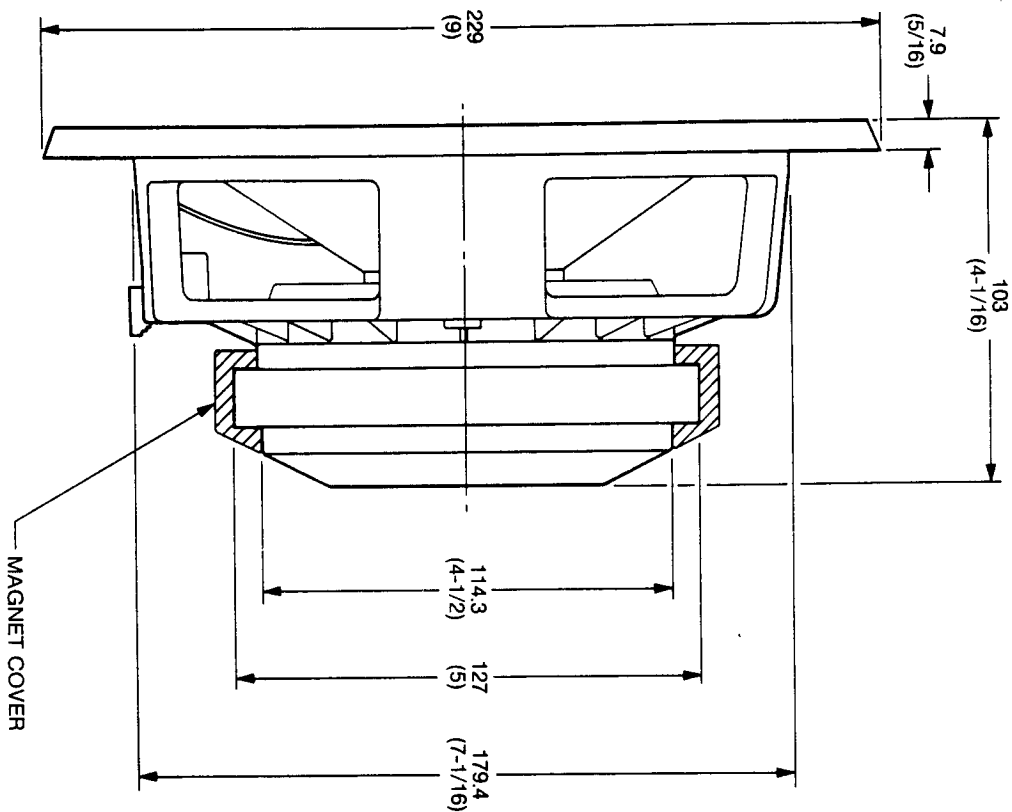

ALL DIMENSIONS ARE REF. ONLY
NOTE: DIMENSIONS IN () ARE IN INCHES

JBL2118H/J