

# Technical Manual



# JBL4662A

## SPECIFICATIONS

### ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Power Rating: Continuous Program: 300W  
Continuous Pink Noise: 150W
- Frequency Response: 45 Hz to 20 kHz
- Sensitivity: 105 dB SPL\*
- Crossover Frequencies: 800 Hz

### SYSTEM COMPONENTS:

- Cabinet: C4560BKA
- Grille: N/A

\*1 Watt (2.83 V RMS) @ 1 Meter

### SYSTEM COMPONENTS: (cont'd)

- Low Frequency Transducer: 380mm (15 in.) Cone Transducer (E140-8)
- High Frequency Transducer: 25mm (1 in.) Titanium Compression Driver (2426J)
- Crossover Network: 3110A


### PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 914mm x 762mm x 606mm D (36.0 x 30.0 x 23.87 in. D)
- Shipping Weight: 139 lbs.


### WARRANTY INFORMATION:

- Refer to the Warranty Statement packed with each product.

## PACKAGE

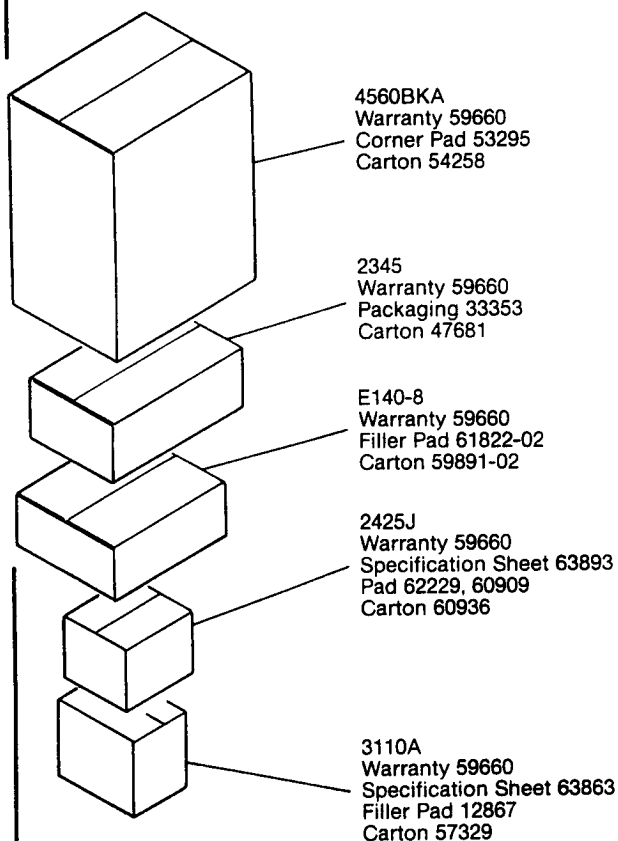

## WIRING DIAGRAM

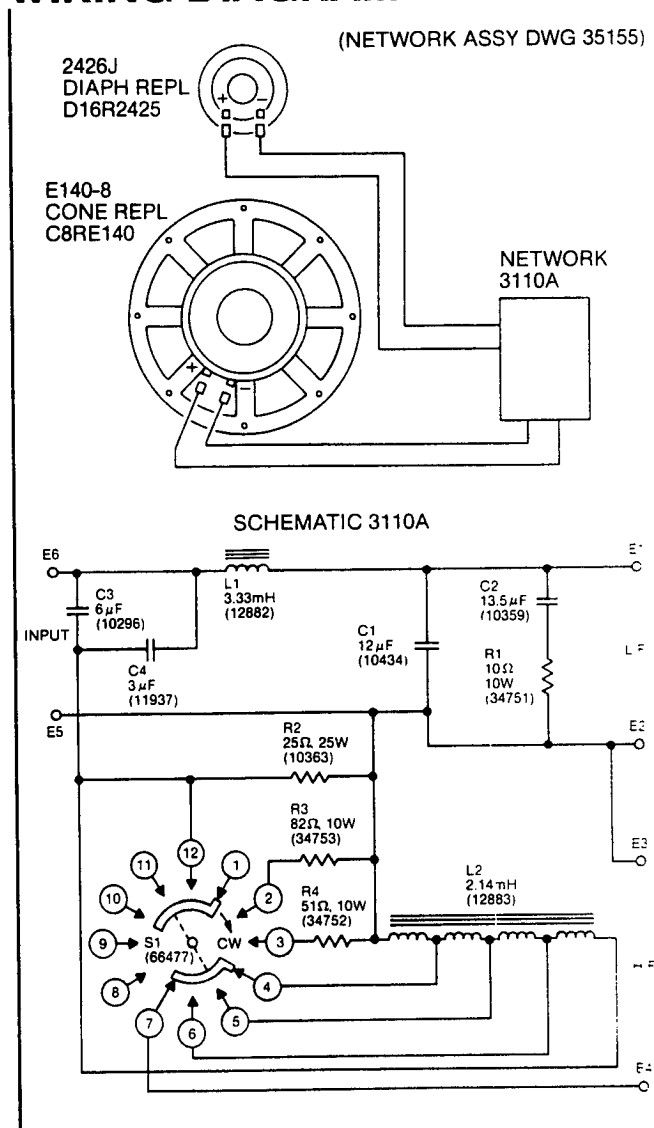

# JBL4662A

## COMPONENT EXPLODED VIEW

Horn 2370A  
64868-01

Bolt (Ref)

Speaker High Freq  
2426J  
Diaph Repl  
D16R2425  
Use Mounting Hardware  
Included With  
Installation Kit 57534

Network 3110A  
35155  
Use Mounting Hardware  
Included With  
Installation Kit 55343

Screw (Ref)

Cover  
39895

Screw  
22372

Screw  
(Ref)

Cabinet 4560BKA  
57992  
(Not For Sale)

Cover, Horn  
65244

Screw  
22372

Screw  
(Ref)

Gasket Vinyl  
34499

Speaker Low Freq  
E140-8  
Cone Repl  
C8RE140  
Use Mounting Hardware  
Included With  
Installation Kit 55340

JBL4662A

