


# Technical Manual



# JBL4675A-2

## SPECIFICATIONS

### ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Power Rating: Continuous Pink Noise: 300W  
Continuous Program: 600W
- Frequency Response: 35 Hz to 20 kHz
- Sensitivity: 100 dB SPL\*
- Crossover Frequencies: 500 Hz

### SYSTEM COMPONENTS:

- Cabinet: C4508
- Grille: N/A
- Low Frequency Transducer: 380mm (15 in.) Cone Transducer (2), 2225J

\*1 Watt (2.83 V RMS) @ 1 Meter

### SYSTEM COMPONENTS: (cont'd)

- High Frequency Transducer: 100mm (4 in.) Pure Titanium Diaphragm, 2445J
- Crossover Network: 3160

### PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 1797mm x 770mm x 949mm D  
(70.75 x 30.31 x 37.37 in. D)
- Shipping Weight: 215 lbs.


### WARRANTY INFORMATION:

- Refer to the Warranty Statement packed with each product.


### NOTE:

- Two complete systems required.

## PACKAGE

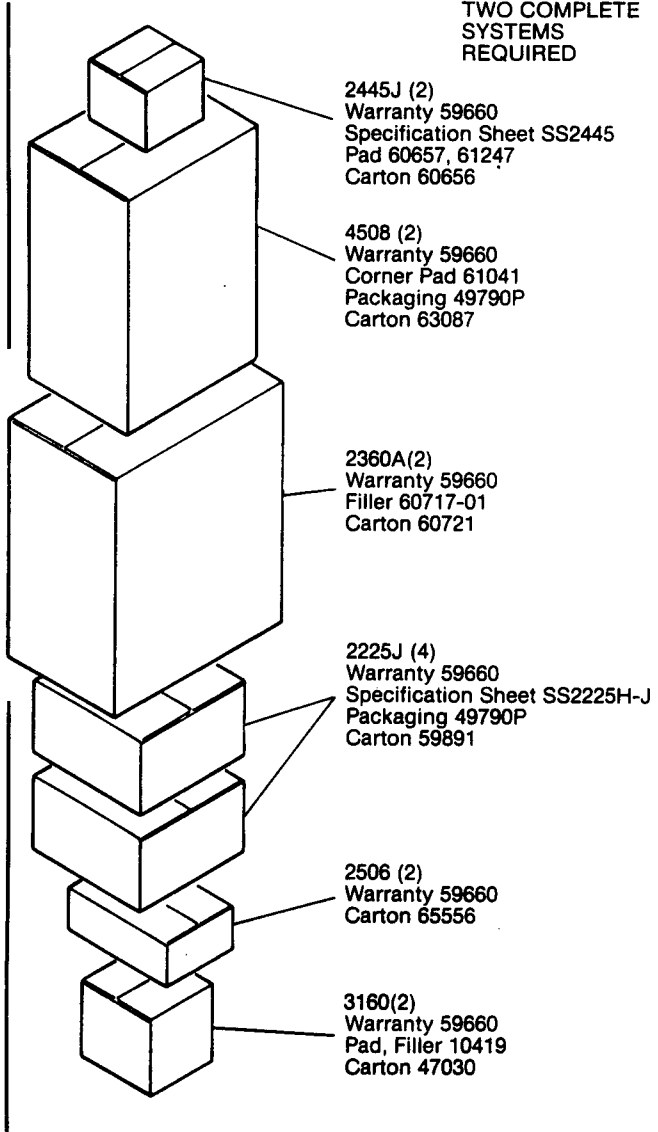


## WIRING DIAGRAM

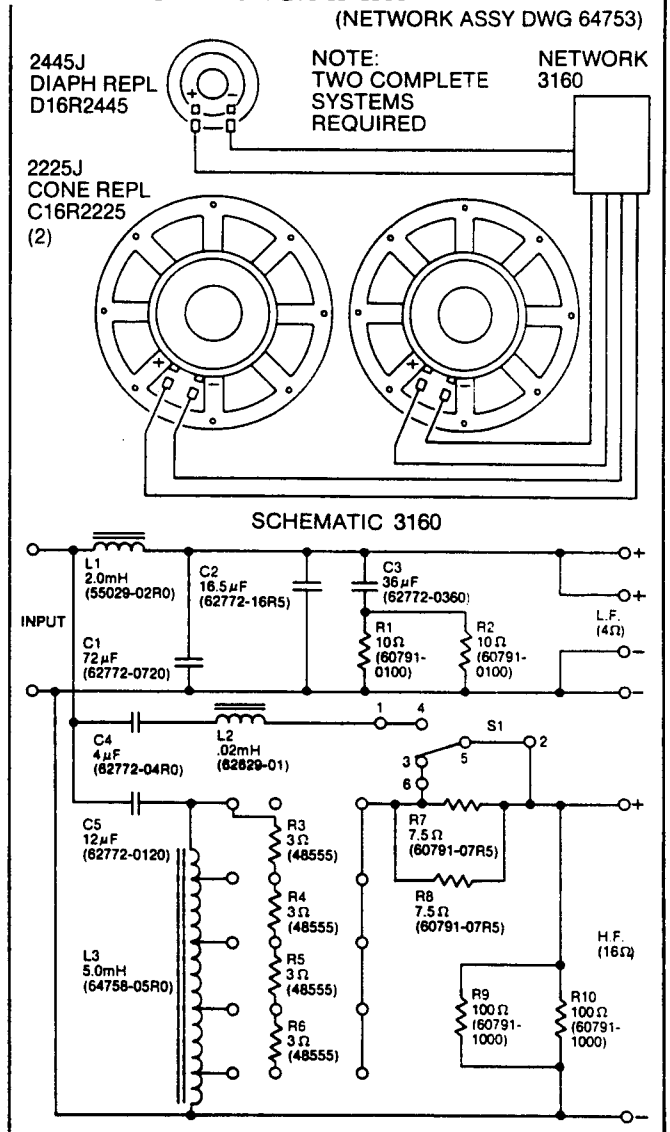

# JBL4675A-2

## COMPONENT EXPLODED VIEW

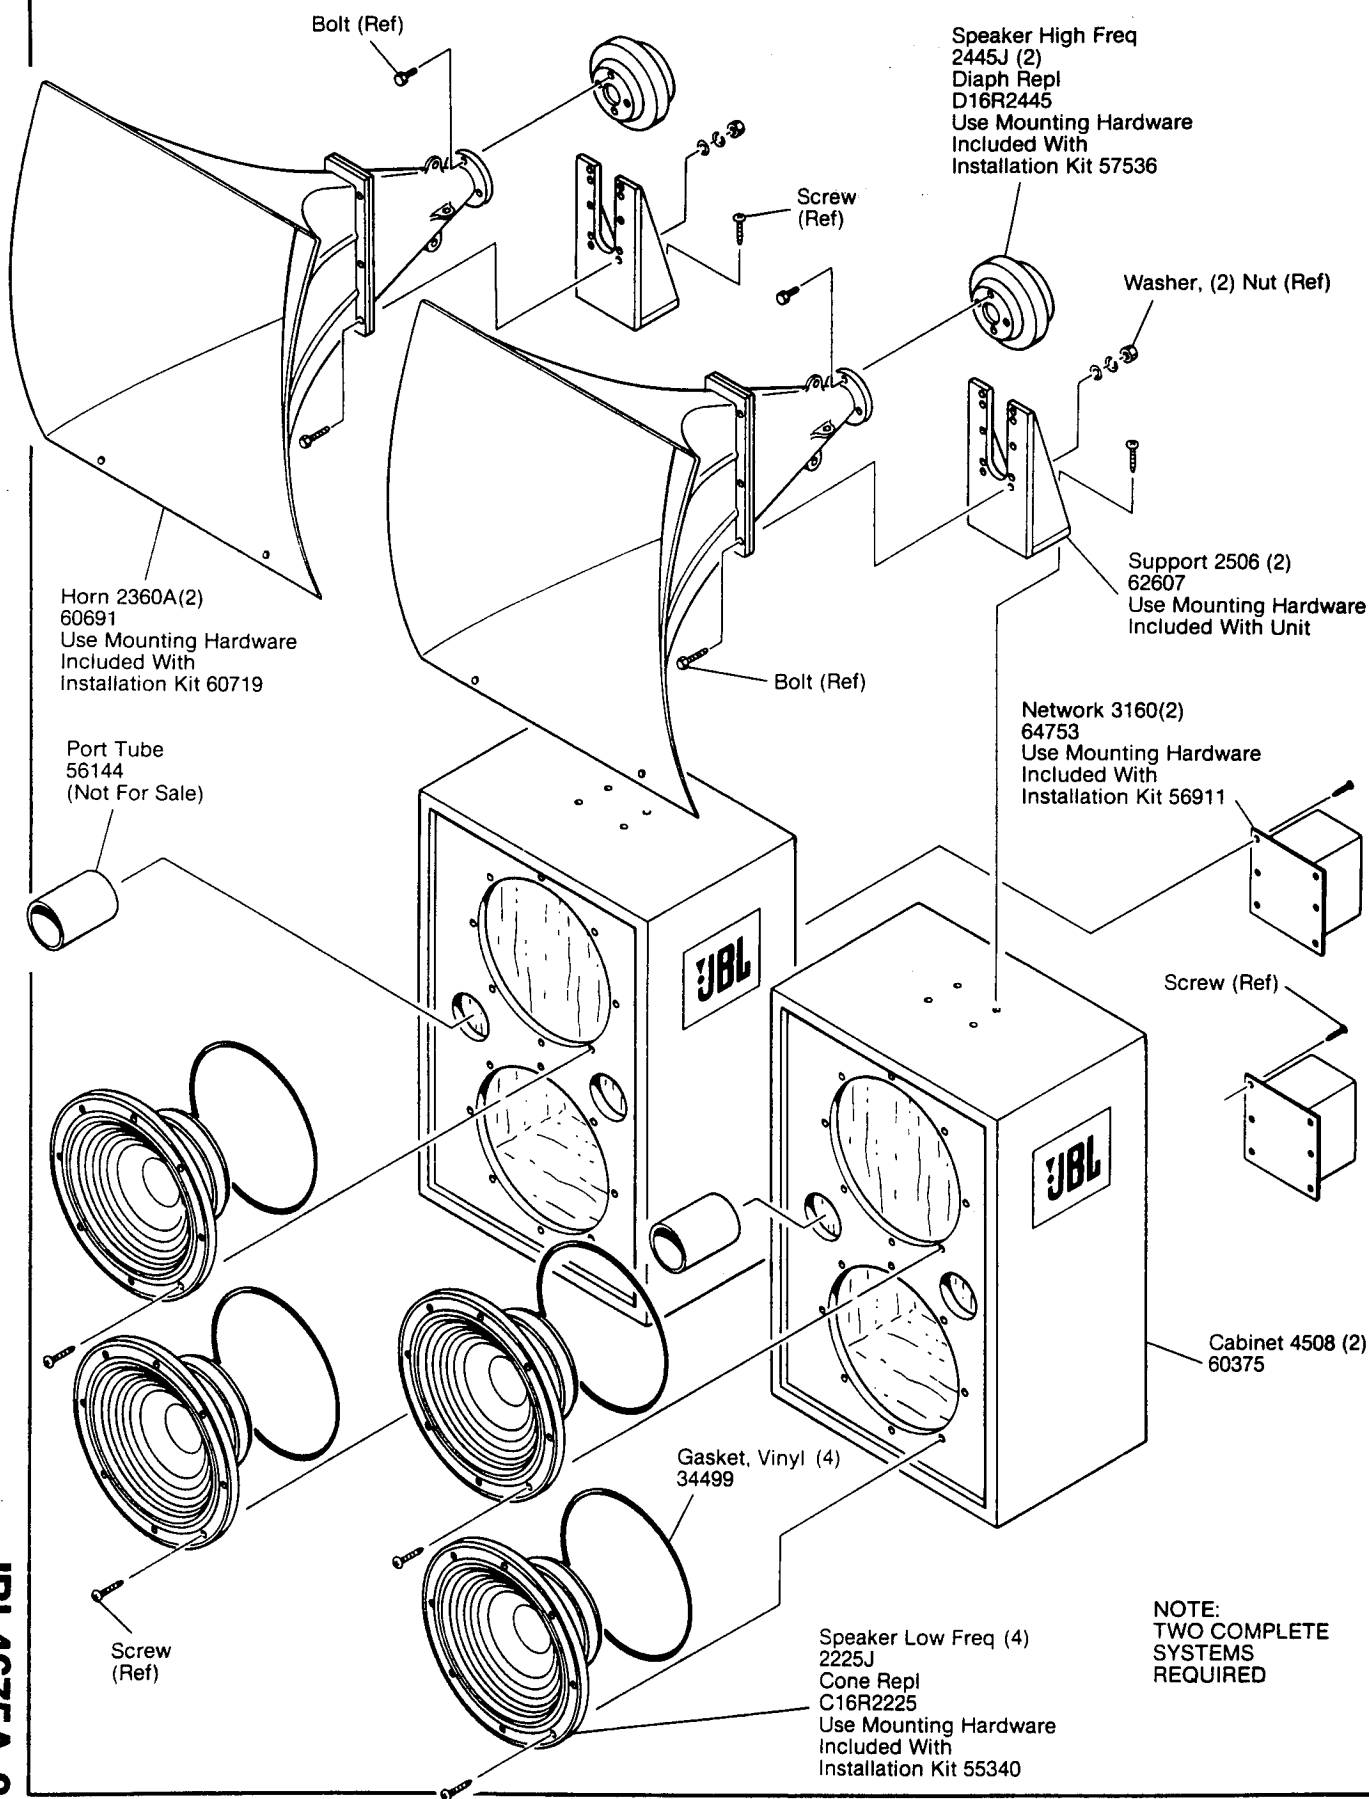

JBL4675A-2