

Technical Manual

JBL4742 DUAL 300 MM (12") DIRECT RADIATOR SUB-BASS SYSTEM



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 4 ohm
- Power Rating: Continuous Program: 700W
- Frequency Response: 35 Hz to 800 Hz (± 3 dB)
- Sensitivity: 98 dB SPL*
- Crossover Frequencies: 80 Hz to 250 Hz, 30 Hz Low Cut

SYSTEM COMPONENTS:

- Cabinet: C4742
- Grille: G4742

*1 Watt (2.83 V RMS) @ 1 Meter

SYSTEM COMPONENTS: (cont'd)

- Low Frequency Transducer: 300mm (12 in.) Cone Transducer (2204H) (2)
- Crossover Network: JBL/UREI 5235 Active Crossover


PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 500mm x 850mm x 530mm D (19.68 x 33.5 x 20.87 in. D)
- Shipping Weight: 103 lbs. (46 kg)

WARRANTY INFORMATION:

- Refer to the Warranty Statement packed with each product.

WIRING DIAGRAM

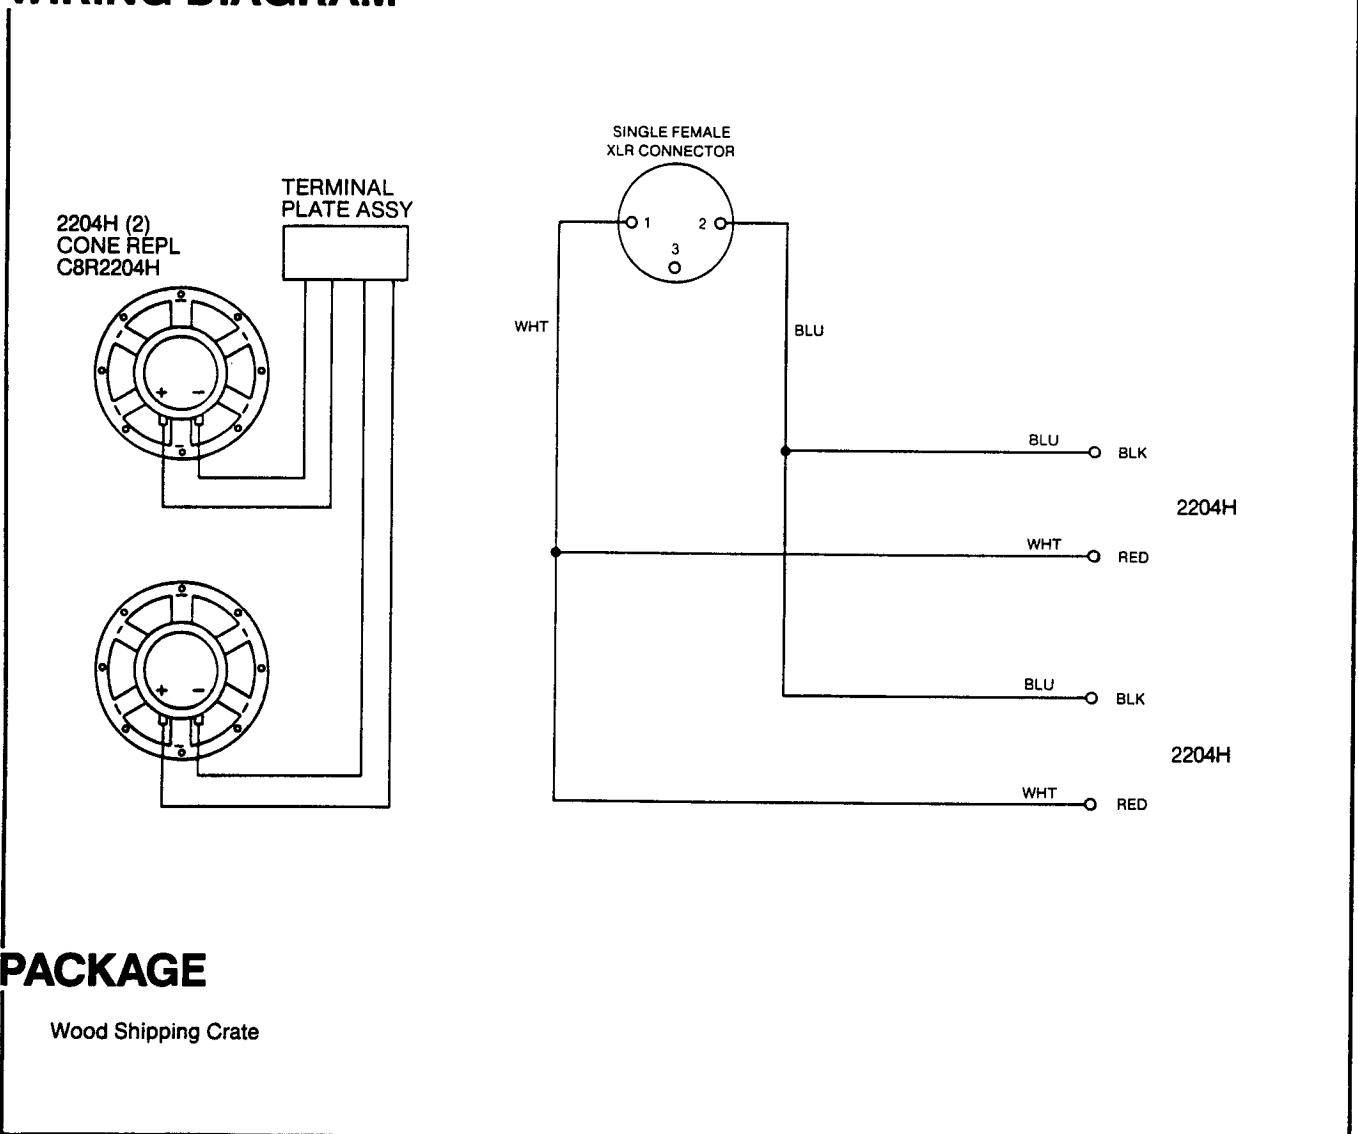


PACKAGE

Wood Shipping Crate

JBL4742

COMPONENT EXPLODED VIEW

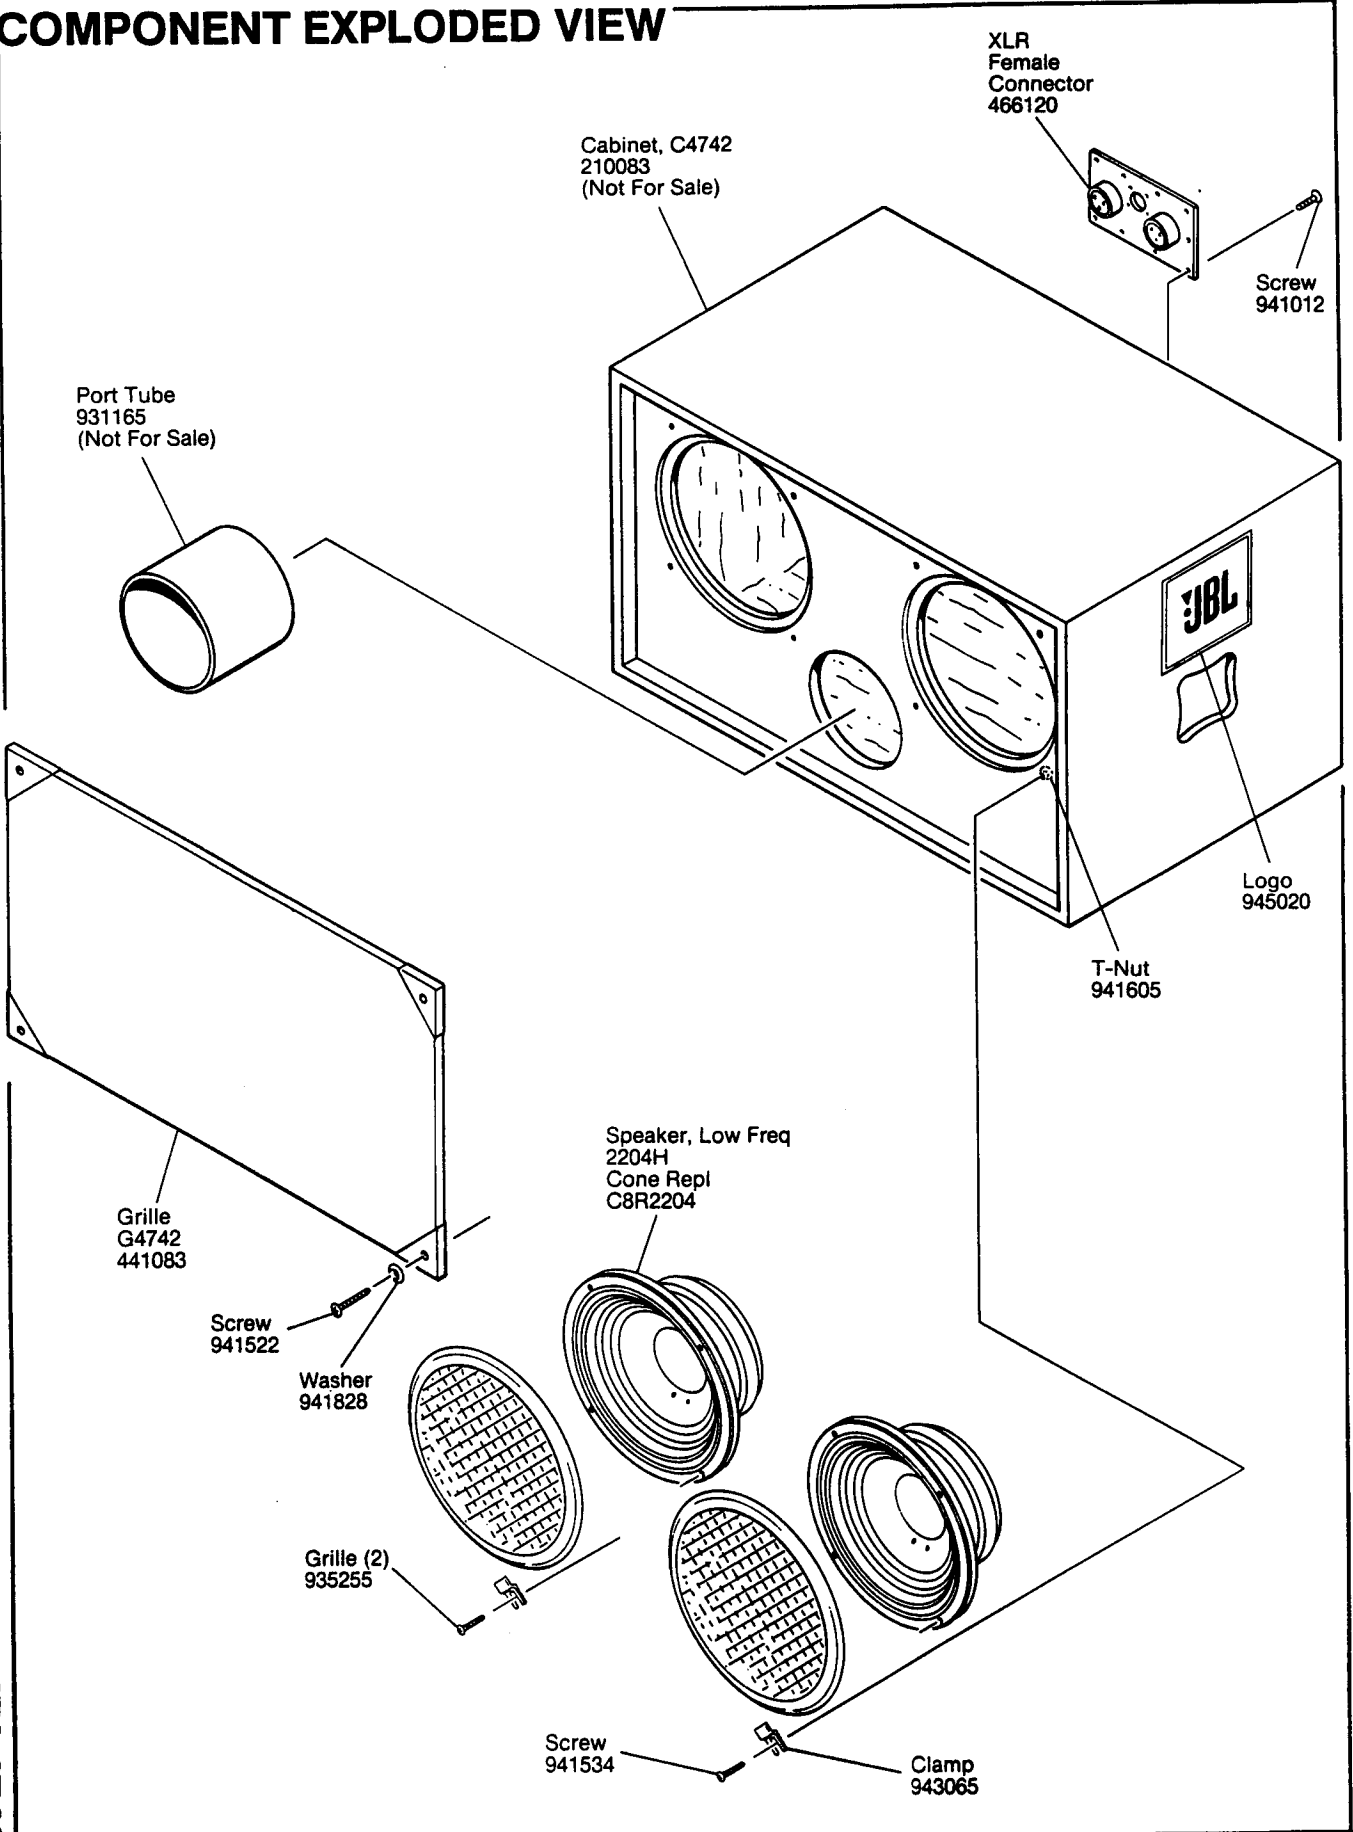

JBL4742