

Technical Manual



JBL4788 DUAL 460MM (18") TRIPLE CHAMBER BANDPASS™ SUB-BASS SYSTEM

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 4 ohm
- Power Rating: Continuous Program: 1200W
- Frequency Response: 28 Hz to 150 Hz (±3 dB)
- Sensitivity: 103 dB SPL*
- Crossover Frequencies: 80 Hz to 100 Hz, 20 Hz Low Cut

SYSTEM COMPONENTS:

- Cabinet: C4788
- Grille: G4788

*1 Watt (2.83 V RMS) @ 1 Meter

SYSTEM COMPONENTS: (cont'd)

- Low Frequency Transducer: 460mm (18 in.) Cone Transducer (2240H) (2)
- Crossover Network: JBL/UREI 5235 Active Crossover


PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 750mm x 1500mm x 800mm D (29.5 x 59.0 x 31.5 in. D)
- Shipping Weight: 268 lbs. (122 kg)

WARRANTY INFORMATION:

- Refer to the Warranty Statement packed with each product.

WIRING DIAGRAM

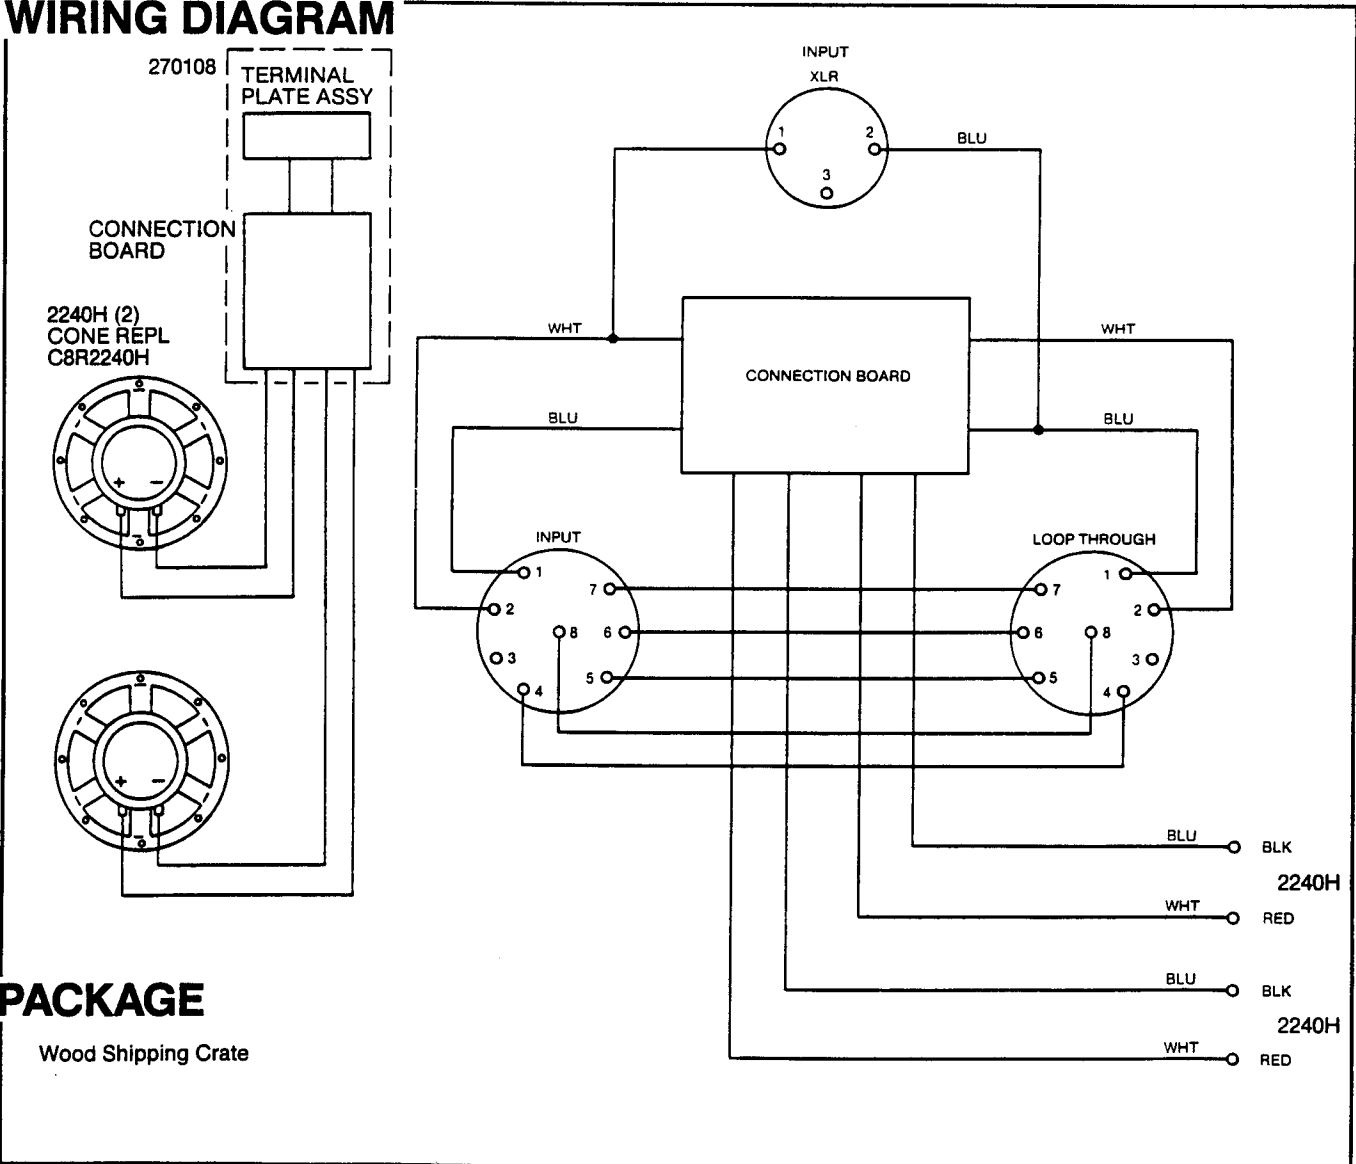

PACKAGE

Wood Shipping Crate

JBL4788 REV A

JBL4788

COMPONENT EXPLODED VIEW

