


Technical Manual

502VX/502VXA

Radiance

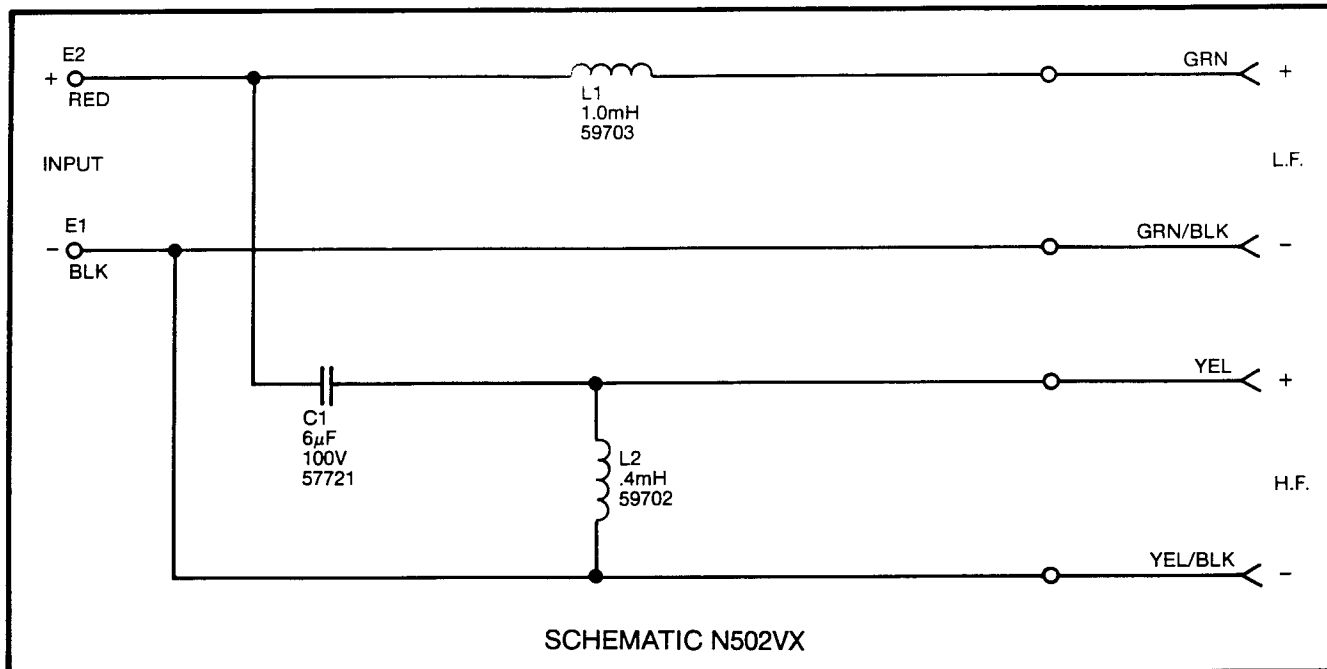

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:	308G
Cone Kit:	C4R308G-1
Nom. Impedance:	4 Ohm
Dynamic Test Input V:	5
Sweep Frequency Hz:	30-1200
D.C. Resistance Ohms:	4.8 min/5.8 max
Gap Gauge:	.051"
Notes:	
If Not Serviceable, Replace With:	308G-1
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No. Slightly Different.
	Replace both units in a stereo pair.
Additional Parts Currently Available*:	
Dome:	61521
Trim Ring:	61513-01
HIGH FREQUENCY DRIVER:	303G (502VX)
	303G-1 (502VXA)
Diaphragm Kit:	C4R303G-2
Nom. Impedance:	4 Ohm
Dynamic Test Input V:	4
Sweep Frequency Hz:	1000-2000
D.C. Resistance Ohms:	3.6 min/4.4 max

HIGH FREQUENCY DRIVER (Cont'd)

Gap Gauge:	.031"
Notes:	Test with network.
	Remove Trim Ring carefully. Replacement Trim Ring 59664-01 no longer available.
If Not Serviceable, Replace With:	303G-2
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No. Slightly different.
	Replace both units in a stereo pair.
Additional Parts Currently Available*:	
Dome:	60372

SYSTEM SPECIFICATIONS:

Nom. Impedance:	4 Ohm
Rec. Amp Power Range:	10-80 Watts Continuous Sine Wave Per Channel
Crossover Frequency:	2000 Hz
Sensitivity:	86dB (1 Watt @ 1 Meter)
Enclosure Dim:	21-1/2" x 13-1/2" x 11-3/16" D 546mm x 343mm x 284mm
Shipping Weight:	27-1/2 lbs. - 12.5 kg.
Additional Parts Currently Available*:	
Grill:	G502VX
Binding Posts:	Red: 56131
	Black: 56130

*Other parts may also be available. Check with JBL for details.