


902VX/902VXA

Radiance

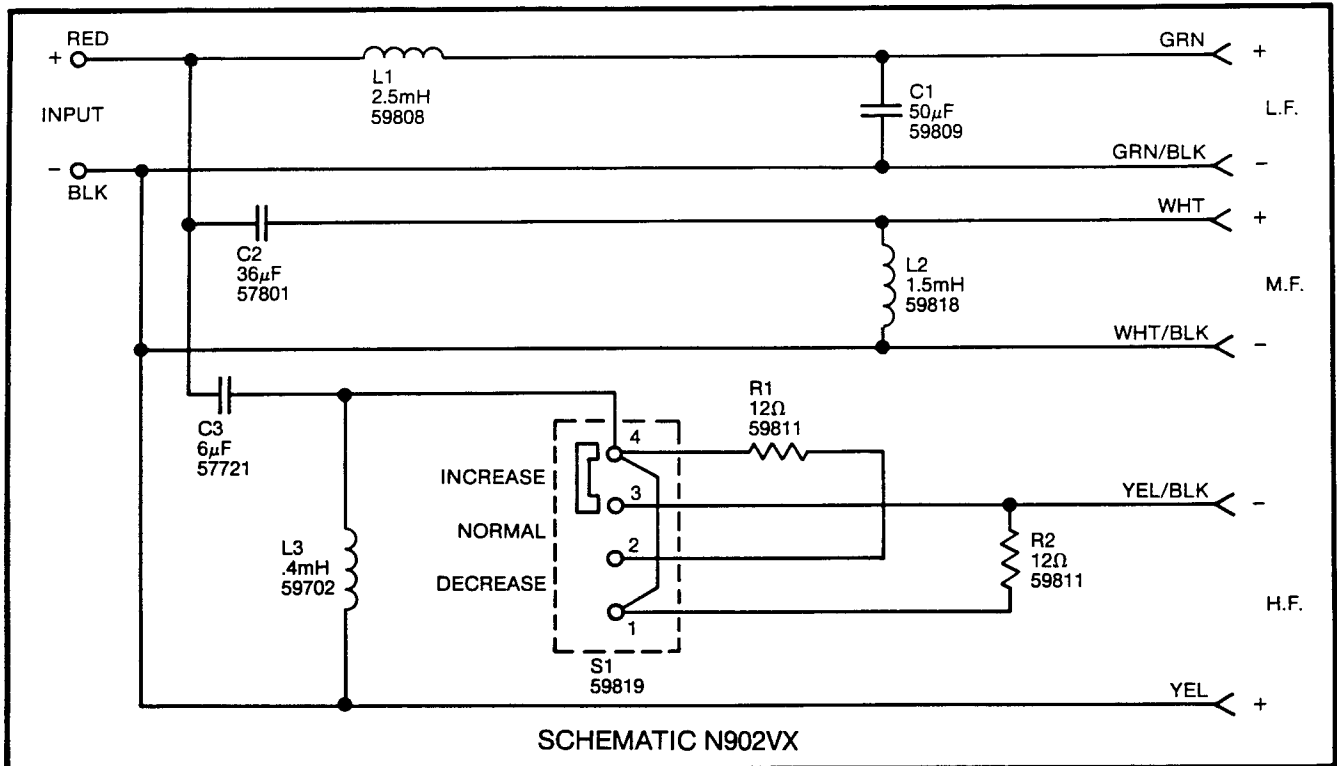

SYSTEM COMPONENTS:

- LOW FREQUENCY DRIVER:** 312G
 Cone Kit: C4R312G-1
 Nom. Impedance: 4 Ohm
 Dynamic Test Input V: 5
 Sweep Frequency Hz: 30-1200
 D.C. Resistance Ohms: 4.0 min/4.5 max
 Gap Gauge: .051"
 Notes: Remove Trim Ring carefully. Replacement Trim Rim 61363-01 no longer available.
 If Not Serviceable, Replace With: 512G
 Visual Change: Yes
 Baffle Modification: No
 Exact Acoustic Replacement: No. Slightly Different.
 Replace both units in a stereo pair.
 Additional Parts Currently Available*: None
- MID RANGE DRIVER:** 305G
 Cone Kit: C4R305G-1
 Nom. Impedance: 4 Ohm
 Dynamic Test Input V: 4
 Sweep Frequency Hz: 75-3000
 D.C. Resistance Ohms: 3.9 min/4.4 max
 Gap Gauge: .040"
 Notes: Remove Trim Ring carefully. Replacement Trim Ring 61373-01 no longer available.
 If Not Serviceable, Replace With: 305G-1 or 305G-2
 Visual Change: Yes
 Baffle Modification: No
 Exact Acoustic Replacement: No. Slightly different.
 Replace both units in a stereo pair.

- MID RANGE DRIVER (Cont'd)**
 Additional Parts Currently Available*:
 Dome: 54721
- HIGH FREQUENCY DRIVER:** 303G (902VX)
 303G-2 (902VXA)
 Diaphragm Kit: C4R303G-2
 Nom. Impedance: 4 Ohm
 Dynamic Test Input V: 4
 Sweep Frequency Hz: 1000-2000
 D.C. Resistance Ohms: 3.6 min/4.4 max
 Gap Gauge: .031"
 Notes: Test with network. Remove Trim Ring carefully. Replacement Trim Ring 59664-01 no longer available.
 If Not Serviceable, Replace With: 303G-2
 Visual Change: Yes
 Baffle Modification: No
 Exact Acoustic Replacement: No. Slightly different.
 Replace both units in a stereo pair.
 Additional Parts Currently Available*:
 Dome: 60372

SYSTEM SPECIFICATIONS:

- Nom. Impedance: 4 Ohm
 Rec. Amp Power Range: 10-200 Watts Continuous Sine Wave Per Channel
 Crossover Frequencies: 600 Hz, 3000 Hz
 Sensitivity: 88dB (1 Watt @ 1 Meter)
 Enclosure Dim: 27-1/2" x 17-1/16" x 12-3/4" D
 699mm x 434mm x 326mm
 Shipping Weight: 44-1/2 lbs. - 20.2 kg.
 Additional Parts Currently Available*:
 Binding Posts: Red: 56131
 Black: 56130

*Other parts may also be available. Check with JBL for details.