

# LX4



## SPECIFICATIONS

### ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- \* Nominal Impedance: 6 ohm
- \* Recommended Amp Power: 10-175W
- \* Frequency Response: 45 Hz - 20 kHz (-6dB)
- \* Sensitivity: 88 dB / 2,83V / 1 m
- \* Crossover frequency: 600 HZ / 2,5 KHZ

### SYSTEM COMPONENTS:

- \* Cabinet: CLX4 (Not for sale)
- \* Grille: GLX4 (2409020)
- \* Woofer: LX210-5 210mm Woofer  
38mm voice coil
- DC Resistance: 5 ohm
- \* Midrange: LX130-M 130mm Midrange  
30mm voice coil

### SYSTEM COMPONENTS: (cont'd)

- DC Resistance: 4,6 ohm
- \* Tweeter: LX026T 25mm  
Titanium Dome Tweeter
- DC Resistance: 4,3 ohm
- \* Crossover Network: NLX4 (2709020)


### PHYSICAL SPECIFICATIONS:

- \* Enclosure Dimensions (H.W.D): 23,6x10,4x12,1 In. D  
(600x264x307mm D)
- \* Shipping Weight: 32 lbs. (14,5 kg.)


### WARRANTY INFORMATION:

- \* Refer to the Warranty Statement packed with each product

## PACKAGE

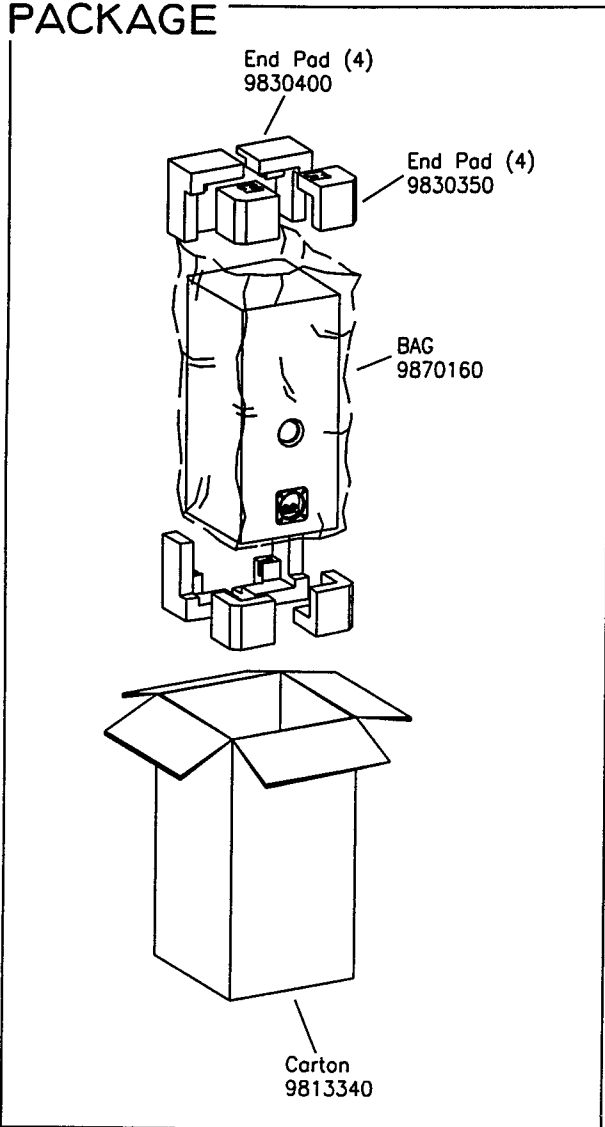

## WIRING DIAGRAM

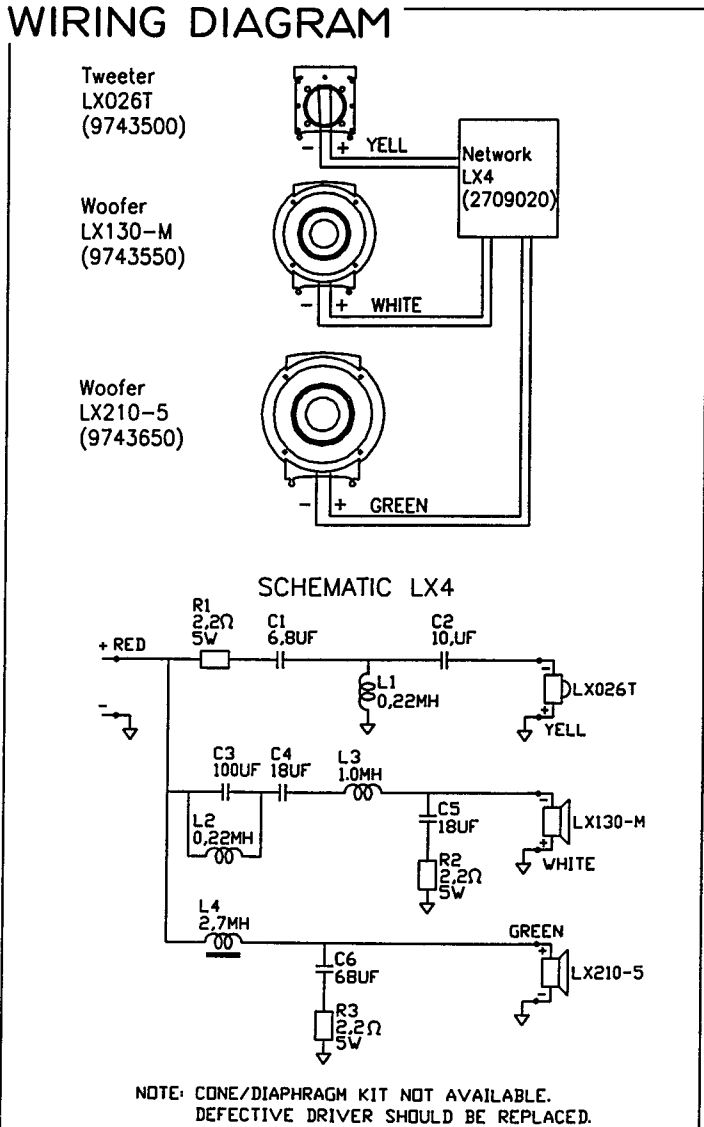

LX4

Valid from serial no. 01001  
Rev. 12/09-1996

## COMPONENT EXPLODED VIEW

