



MR28

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Recommended Amp Power: 10W to 125W
- Frequency Response: 50 Hz to 20 kHz (-6dB)
- Sensitivity: 90 dB SPL*
- Crossover Frequency: 3.5 kHz

SYSTEM COMPONENTS:

- Cabinet: CMR28 (Not For Sale)
- Grille: GMR28 (302112-001)
- Low Frequency Transducer: P208G 8.0 in. (200mm) Nitrile Polymer Fibre Cone (76478)
- DC Resistance: 4.6 ohm ±5%

SYSTEM COMPONENTS: (cont'd)

- High Frequency Transducer: (14mm) Composite Dome Transducer 302354-001
- DC Resistance: 6.0 ohm ±10%
- Crossover Network: NMR28 (302101-003)

AURAL SWEEP TEST SPECIFICATIONS:

- A. System Aural Sweep Test: 5.0V Input, 20 Hz to 20 kHz
- B. L.F. Aural Sweep Test: 4.0V Input, 50 Hz to 5000 Hz
- C. H.F. Aural Sweep Test: 2.0V Input, 1 kHz to 20 kHz

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 19.25 x 10.0 x 10.0 in. D (489mm x 254mm x 254mm D)
- Shipping Weight: 37 lbs. (16.8 kg.) Pair

WARRANTY INFORMATION:


- Refer to the Warranty Statement packed with each product.

*1 Watt @ 1 Meter

PACKAGE

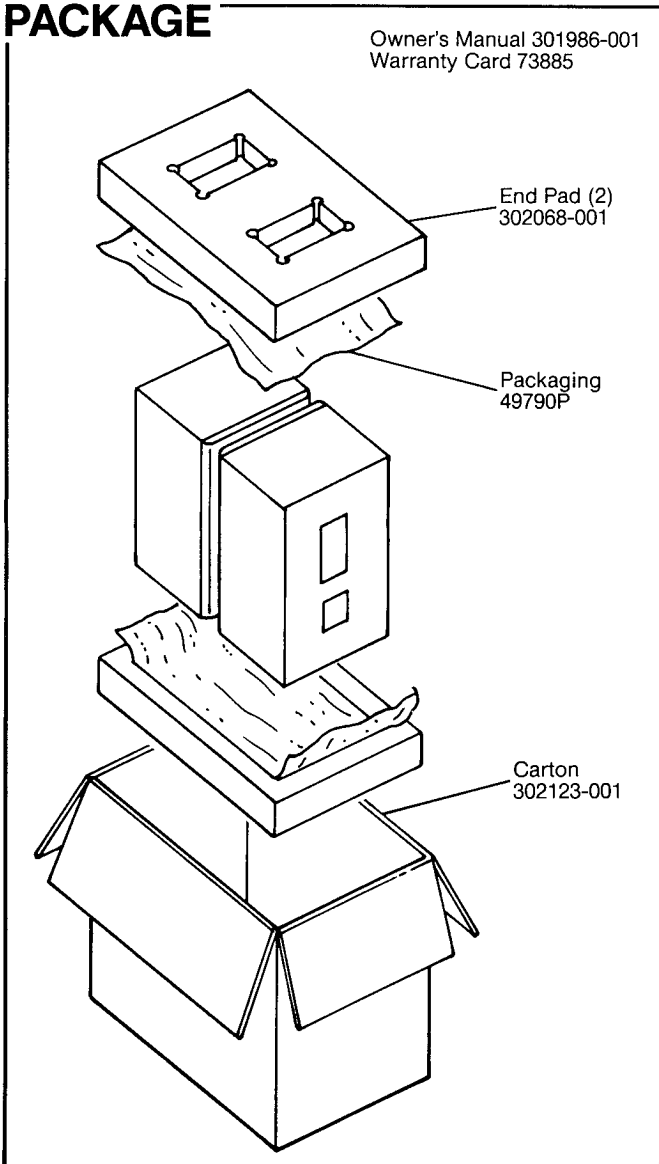


WIRING DIAGRAM

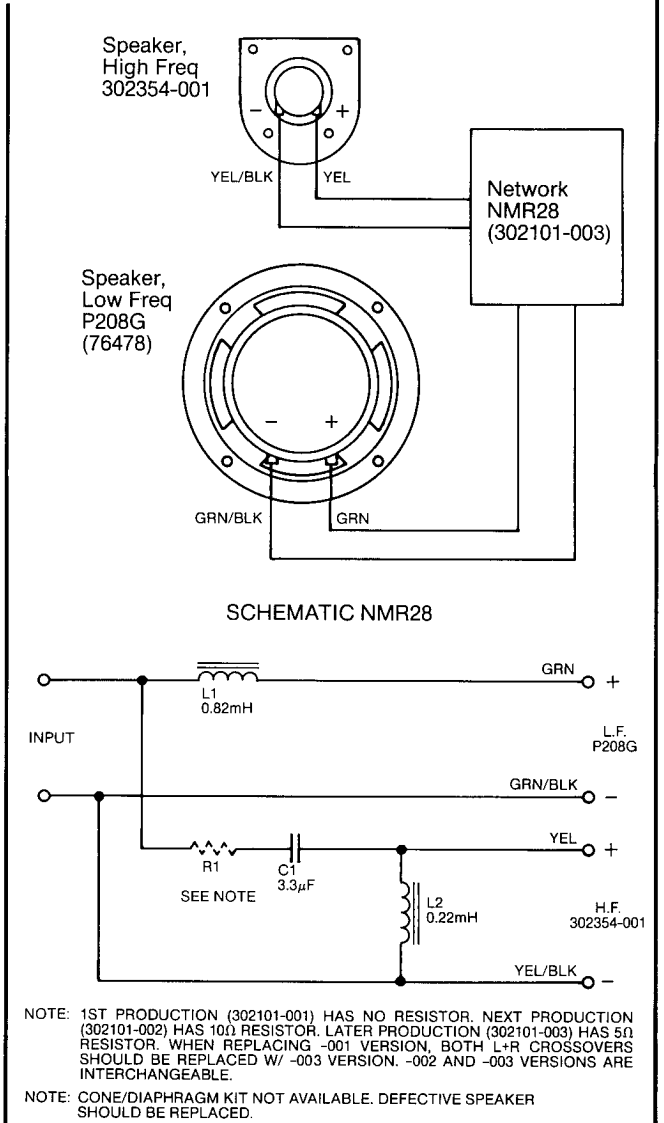

MR28

MR28

COMPONENT EXPLODED VIEW

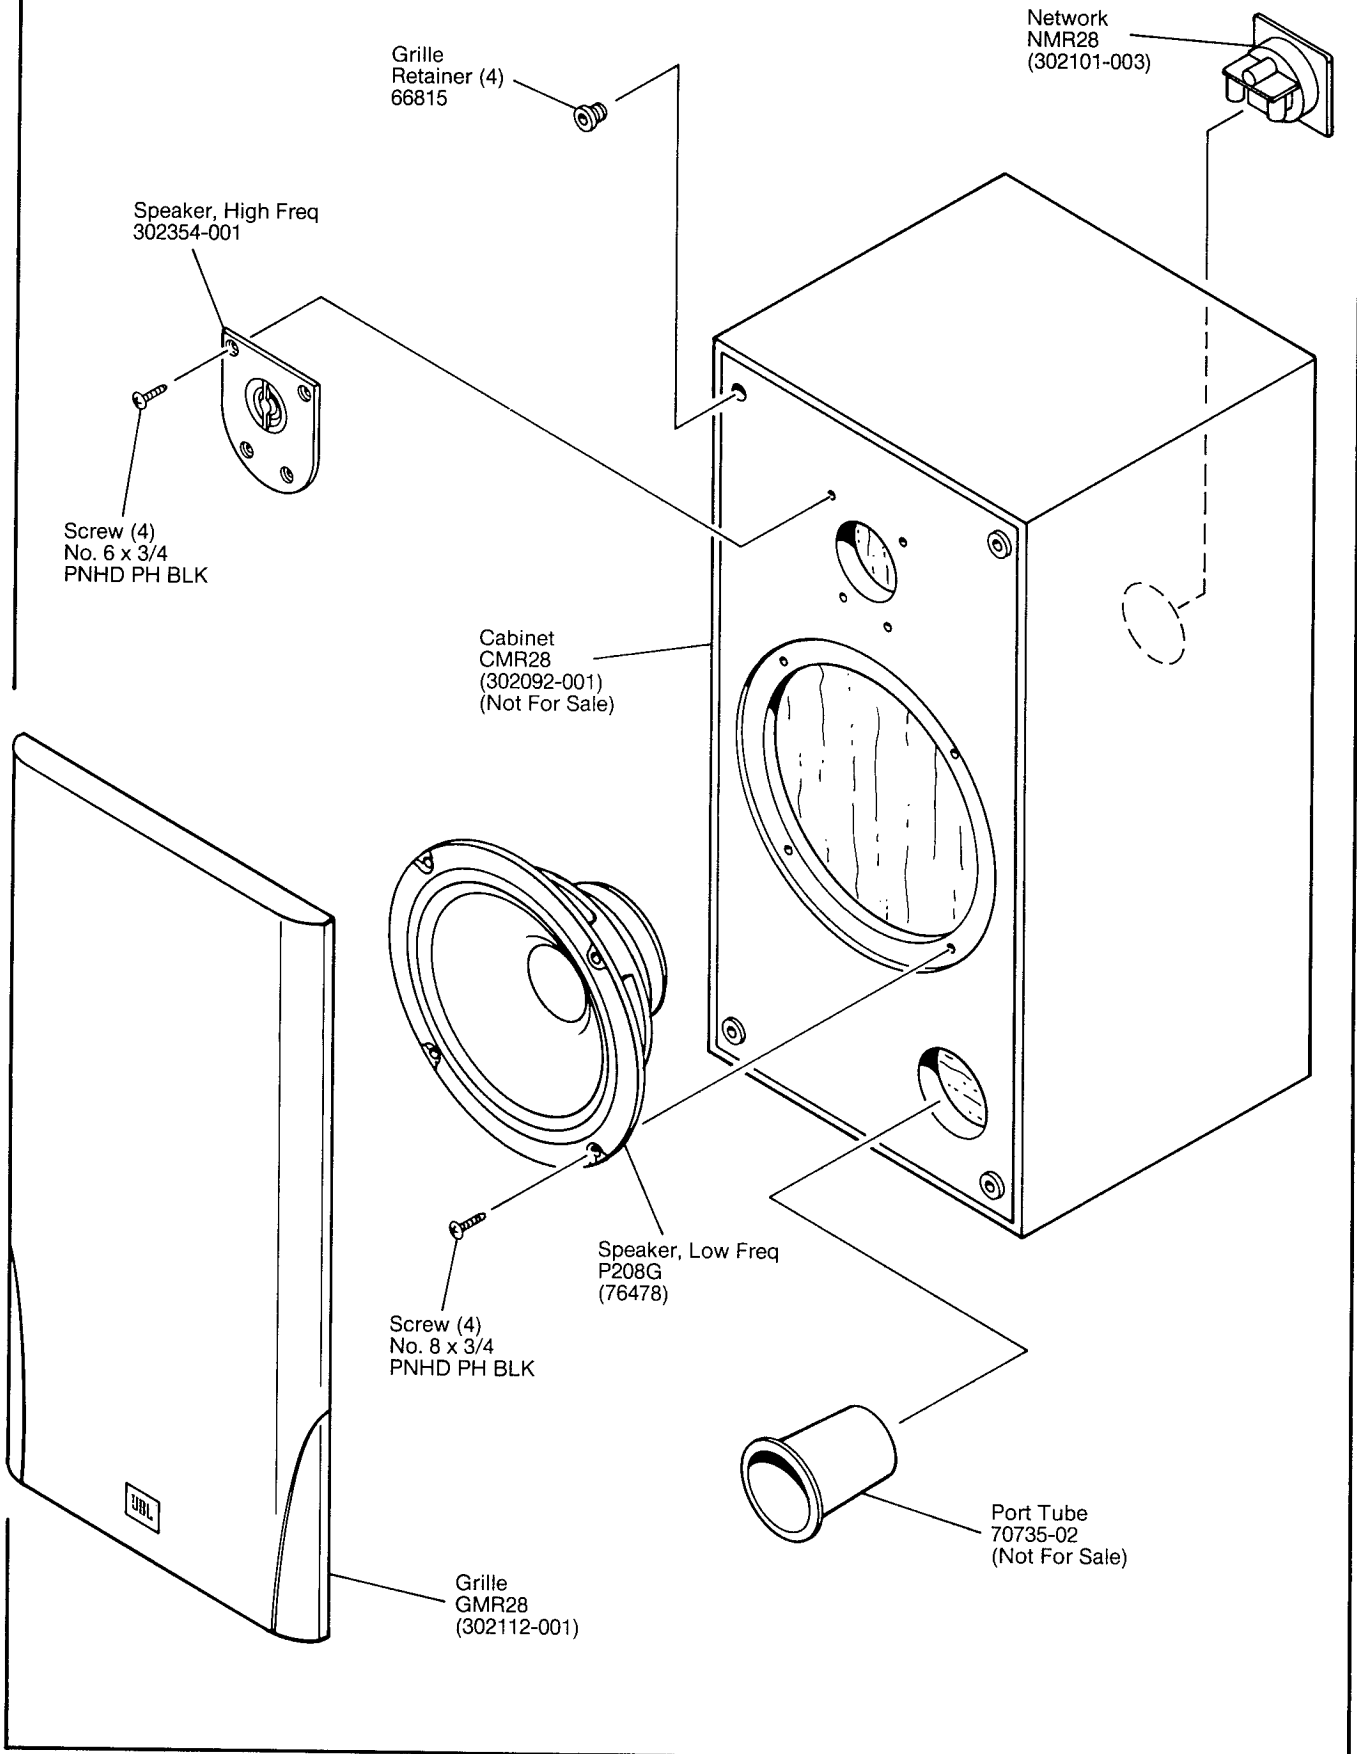

MR28