

S1S

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Power Capacity: 300W
- Frequency Range: 30 Hz to 80 kHz
- Sensitivity: 95 dB SPL* @ 50 Hz
- Crossover Frequencies: 80 Hz Active

SYSTEM COMPONENTS:

- Cabinet: CS1S
- Grille: N/A
- Low Frequency Transducer: 2245H 18 in. (460mm) Cone Transducer
- DC Resistance: 5.1 ohm \pm 10% Copper Wire
- Crossover Network: NS1S

AURAL SWEEP TEST SPECIFICATIONS:

A. L.F. Aural Sweep Test: 11.5V Input, 20 Hz to 1.2 kHz

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 34.5 x 21.0 x 22.0 in. D (876mm x 533mm x 559mm D)
- Shipping Weight: 120 lbs. (54.4 kg.)

WARRANTY INFORMATION:


- Refer to the Warranty Statement packed with each product.

*1 Watt @ 1 Meter

PACKAGE

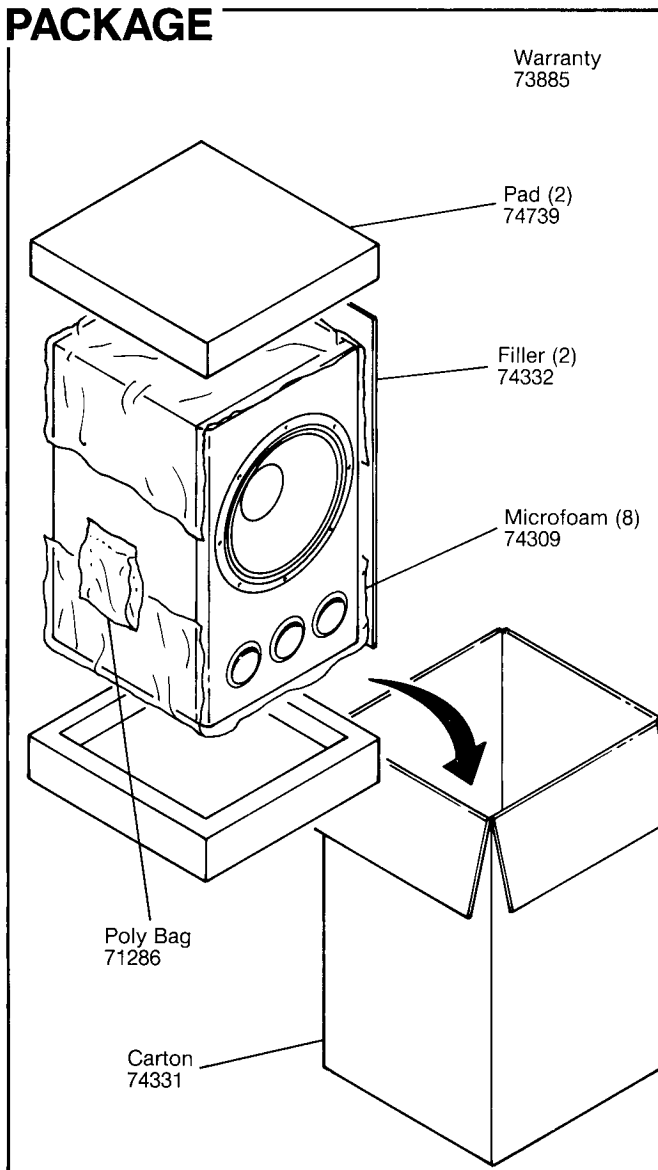


WIRING DIAGRAM

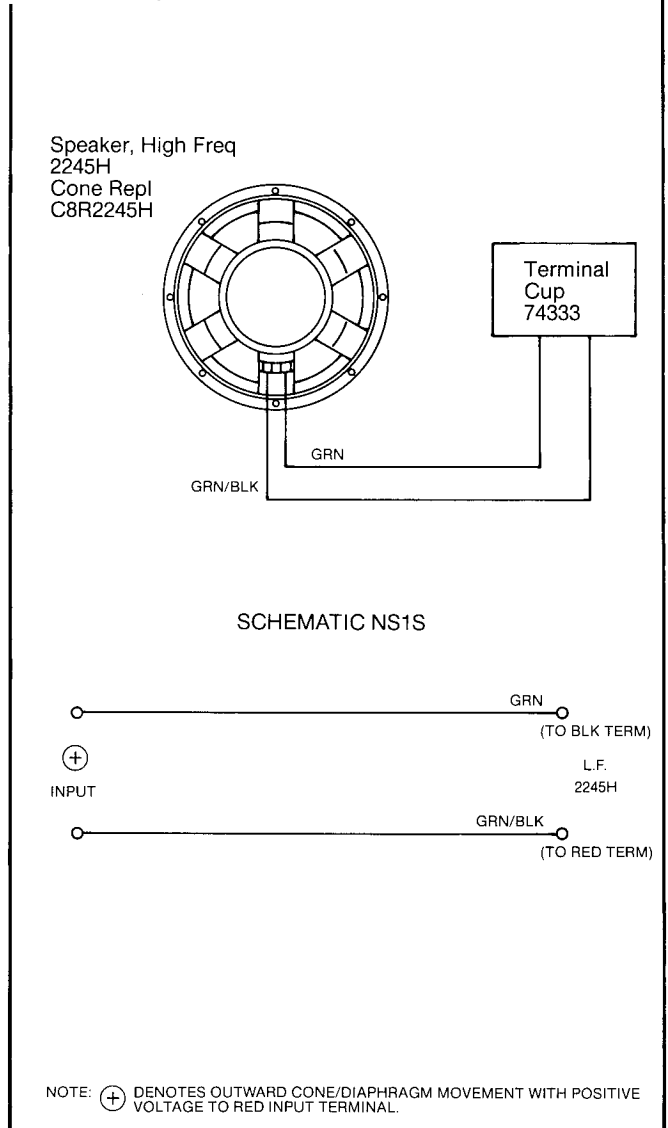

S1S

COMPONENT EXPLODED VIEW

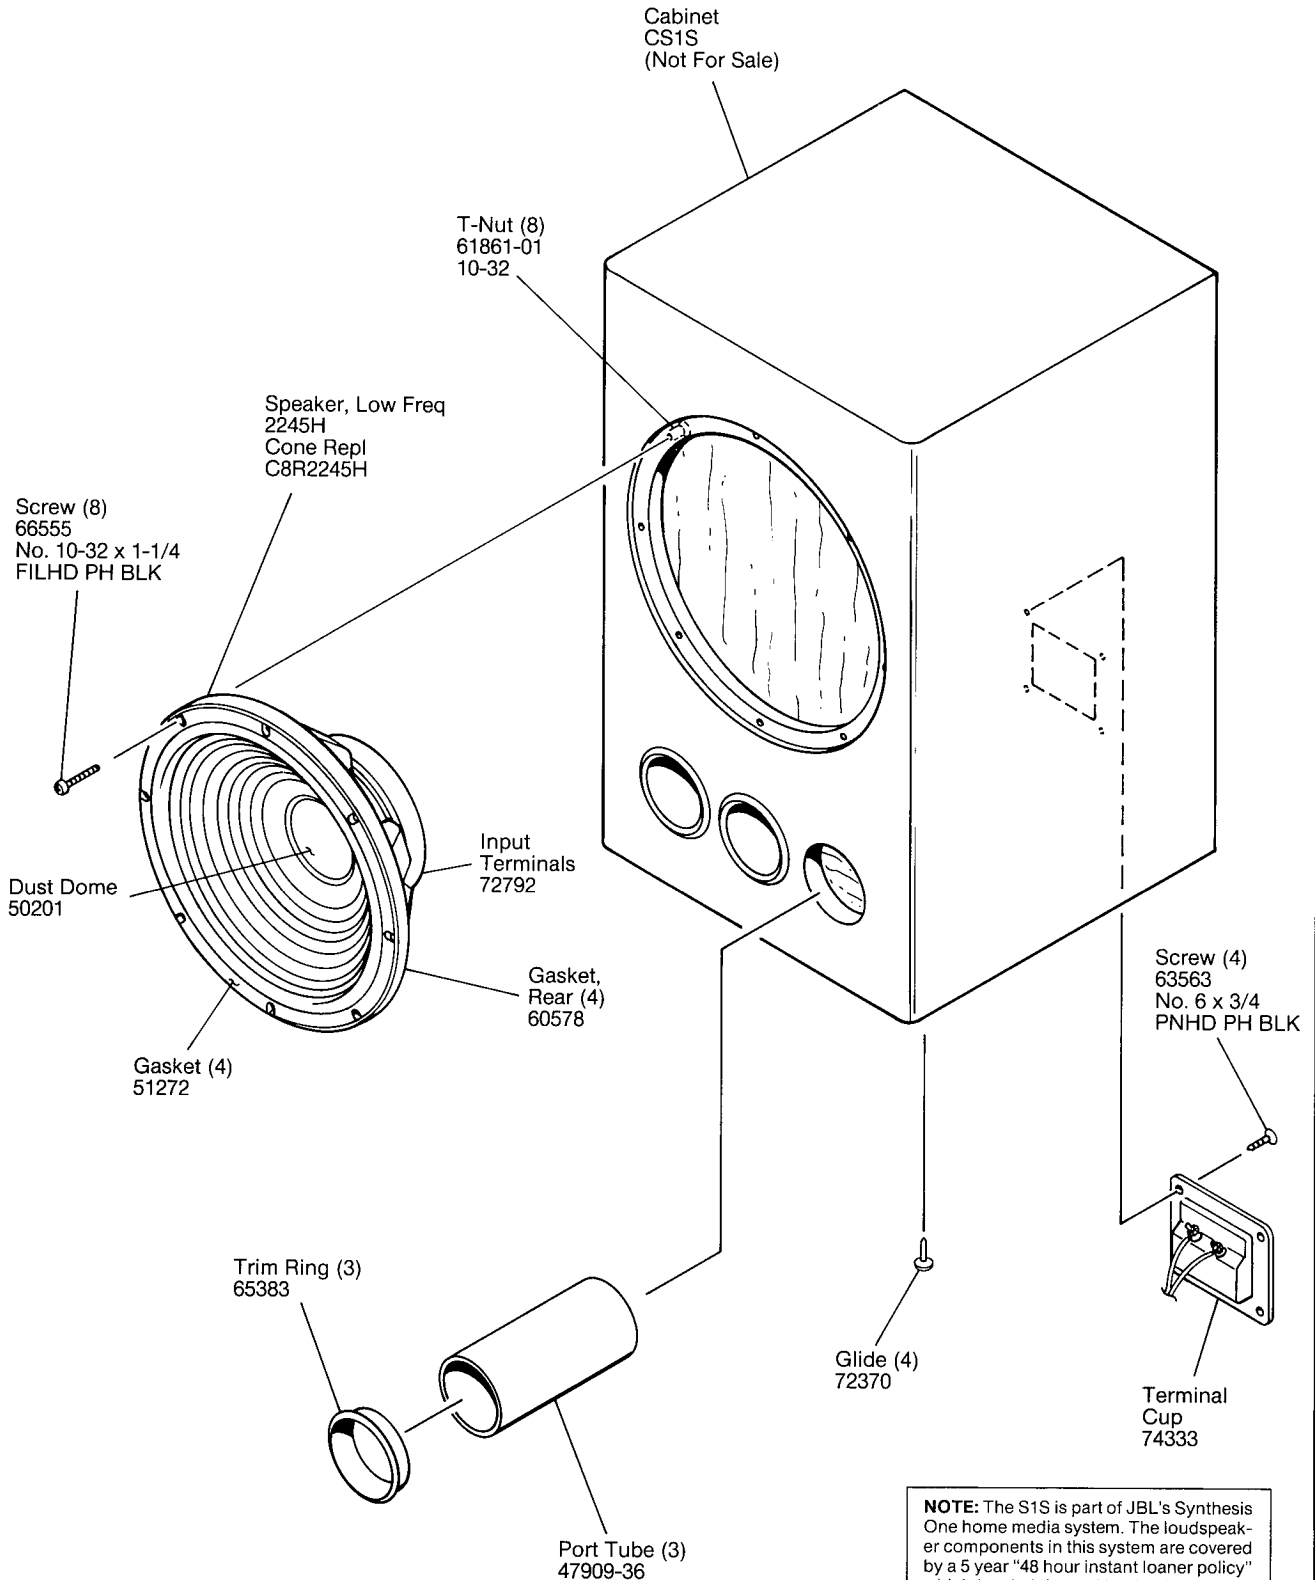

NOTE: The S1S is part of JBL's Synthesis One home media system. The loudspeaker components in this system are covered by a 5 year "48 hour instant loaner policy" which is administered by the JBL dealer. Within the warranty period, all requests for service should be referred to the JBL dealer. If this is not practical, please contact JBL for immediate action.