

Multi-Range MULTIMETER

Wired and Calibrated


Features

- Engineered for Versatility, Accuracy & Precision
- Positive Acting Printed Circuit Lever Switch
- Recessed Thumb Control Ohms Adjust
- Full Size Clear View 3 in. Meter


Versatility has been engineered into the STARKIT Model TM-7 pocket sized multimeter making it ideal for the amateur or the professional. Designed for many applications the instrument will prove invaluable for bench use and a lifesaver to the journeyman. The Model TM-7 will easily fit in your shirt pocket, and still offers the accuracy, versatility and reliability of a larger more expensive multi-meter. Handsomely packaged in a black bakelite case and unbreakable clear view front of modern styling. The very newest features have been incorporated to make the unit a leader in its field and to offer you the very latest. It incorporates a positive acting and printed circuit lever wiper switch; full size clear view 3" meter; unique movement magnifier, recessed positive acting ohms adjust; printed circuit throughout.

The STARKIT Model TM-7 measures a wide range of AC & DC volts; DC current, resistance and DB utilizing only one 16 position switch (range switch). The TM-7 measures AC volts from .1 to 1000 volts; DC volts from .7 to 1000 volts; DC current from 1UA to 500 MA; resistance from 1 ohm to 60 megohms.

The STARKIT Model TM-7 is supplied complete with batteries and test leads. A leather carrying case may be purchased extra. The unit is covered by a 90 day warranty and may be replaced for 50% of the purchase price when the warranty expires. Make it a point to see the complete line of STARKIT test equipment at your distributor.

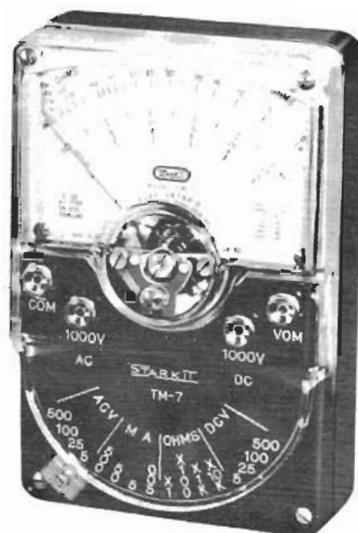


STARKIT MODEL TM-7

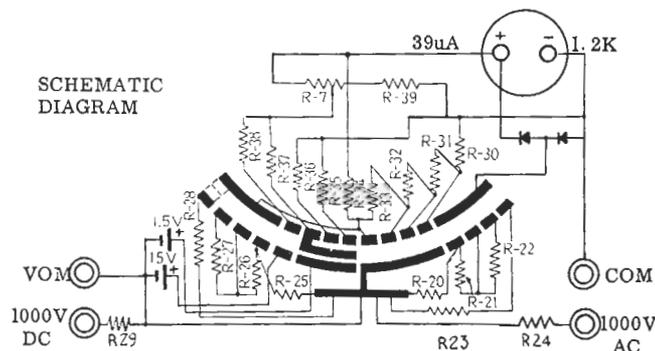


SCHEMATIC DIAGRAM



Fits easily into the palm of your hand.



Interior view



CASE FOR MODEL TM-7

A compact, hard-wearing leather case designed to protect your test instrument and provide ample room for both tester and test leads.

\$3.95

Technical Specifications

SENSITIVITY

20,000 ohms/volts DC
10,000 ohms/volts AC

DECIBELS

-20 to +64 db, 0 db = 1 MW
in a 600 ohm line

RANGES D. C. VOLTS

0-5-25-100-500-1000 volts

CONTROLS

Ohms adjust, range switch

RANGES A. C. VOLTS

0-5-25-100-500-1000 volts

BATTERIES

Burgess Y10 Burgess Z or equal (15V, 1.5V)

RANGE DC CURRENT

0-50 UA, 0-5-50-500 MA

ACCESSORIES

Set of test leads, one black, one red

RESISTANCE

0-6K-600K-6 meg - 60 meg

WEIGHT

14 oz. approx.

SIZE

4 5/8" x 3" x 1 1/4" approx.

STARKIT MODEL TM-7

SCHEMATIC
DIAGRAM

