


SCHEMATIC

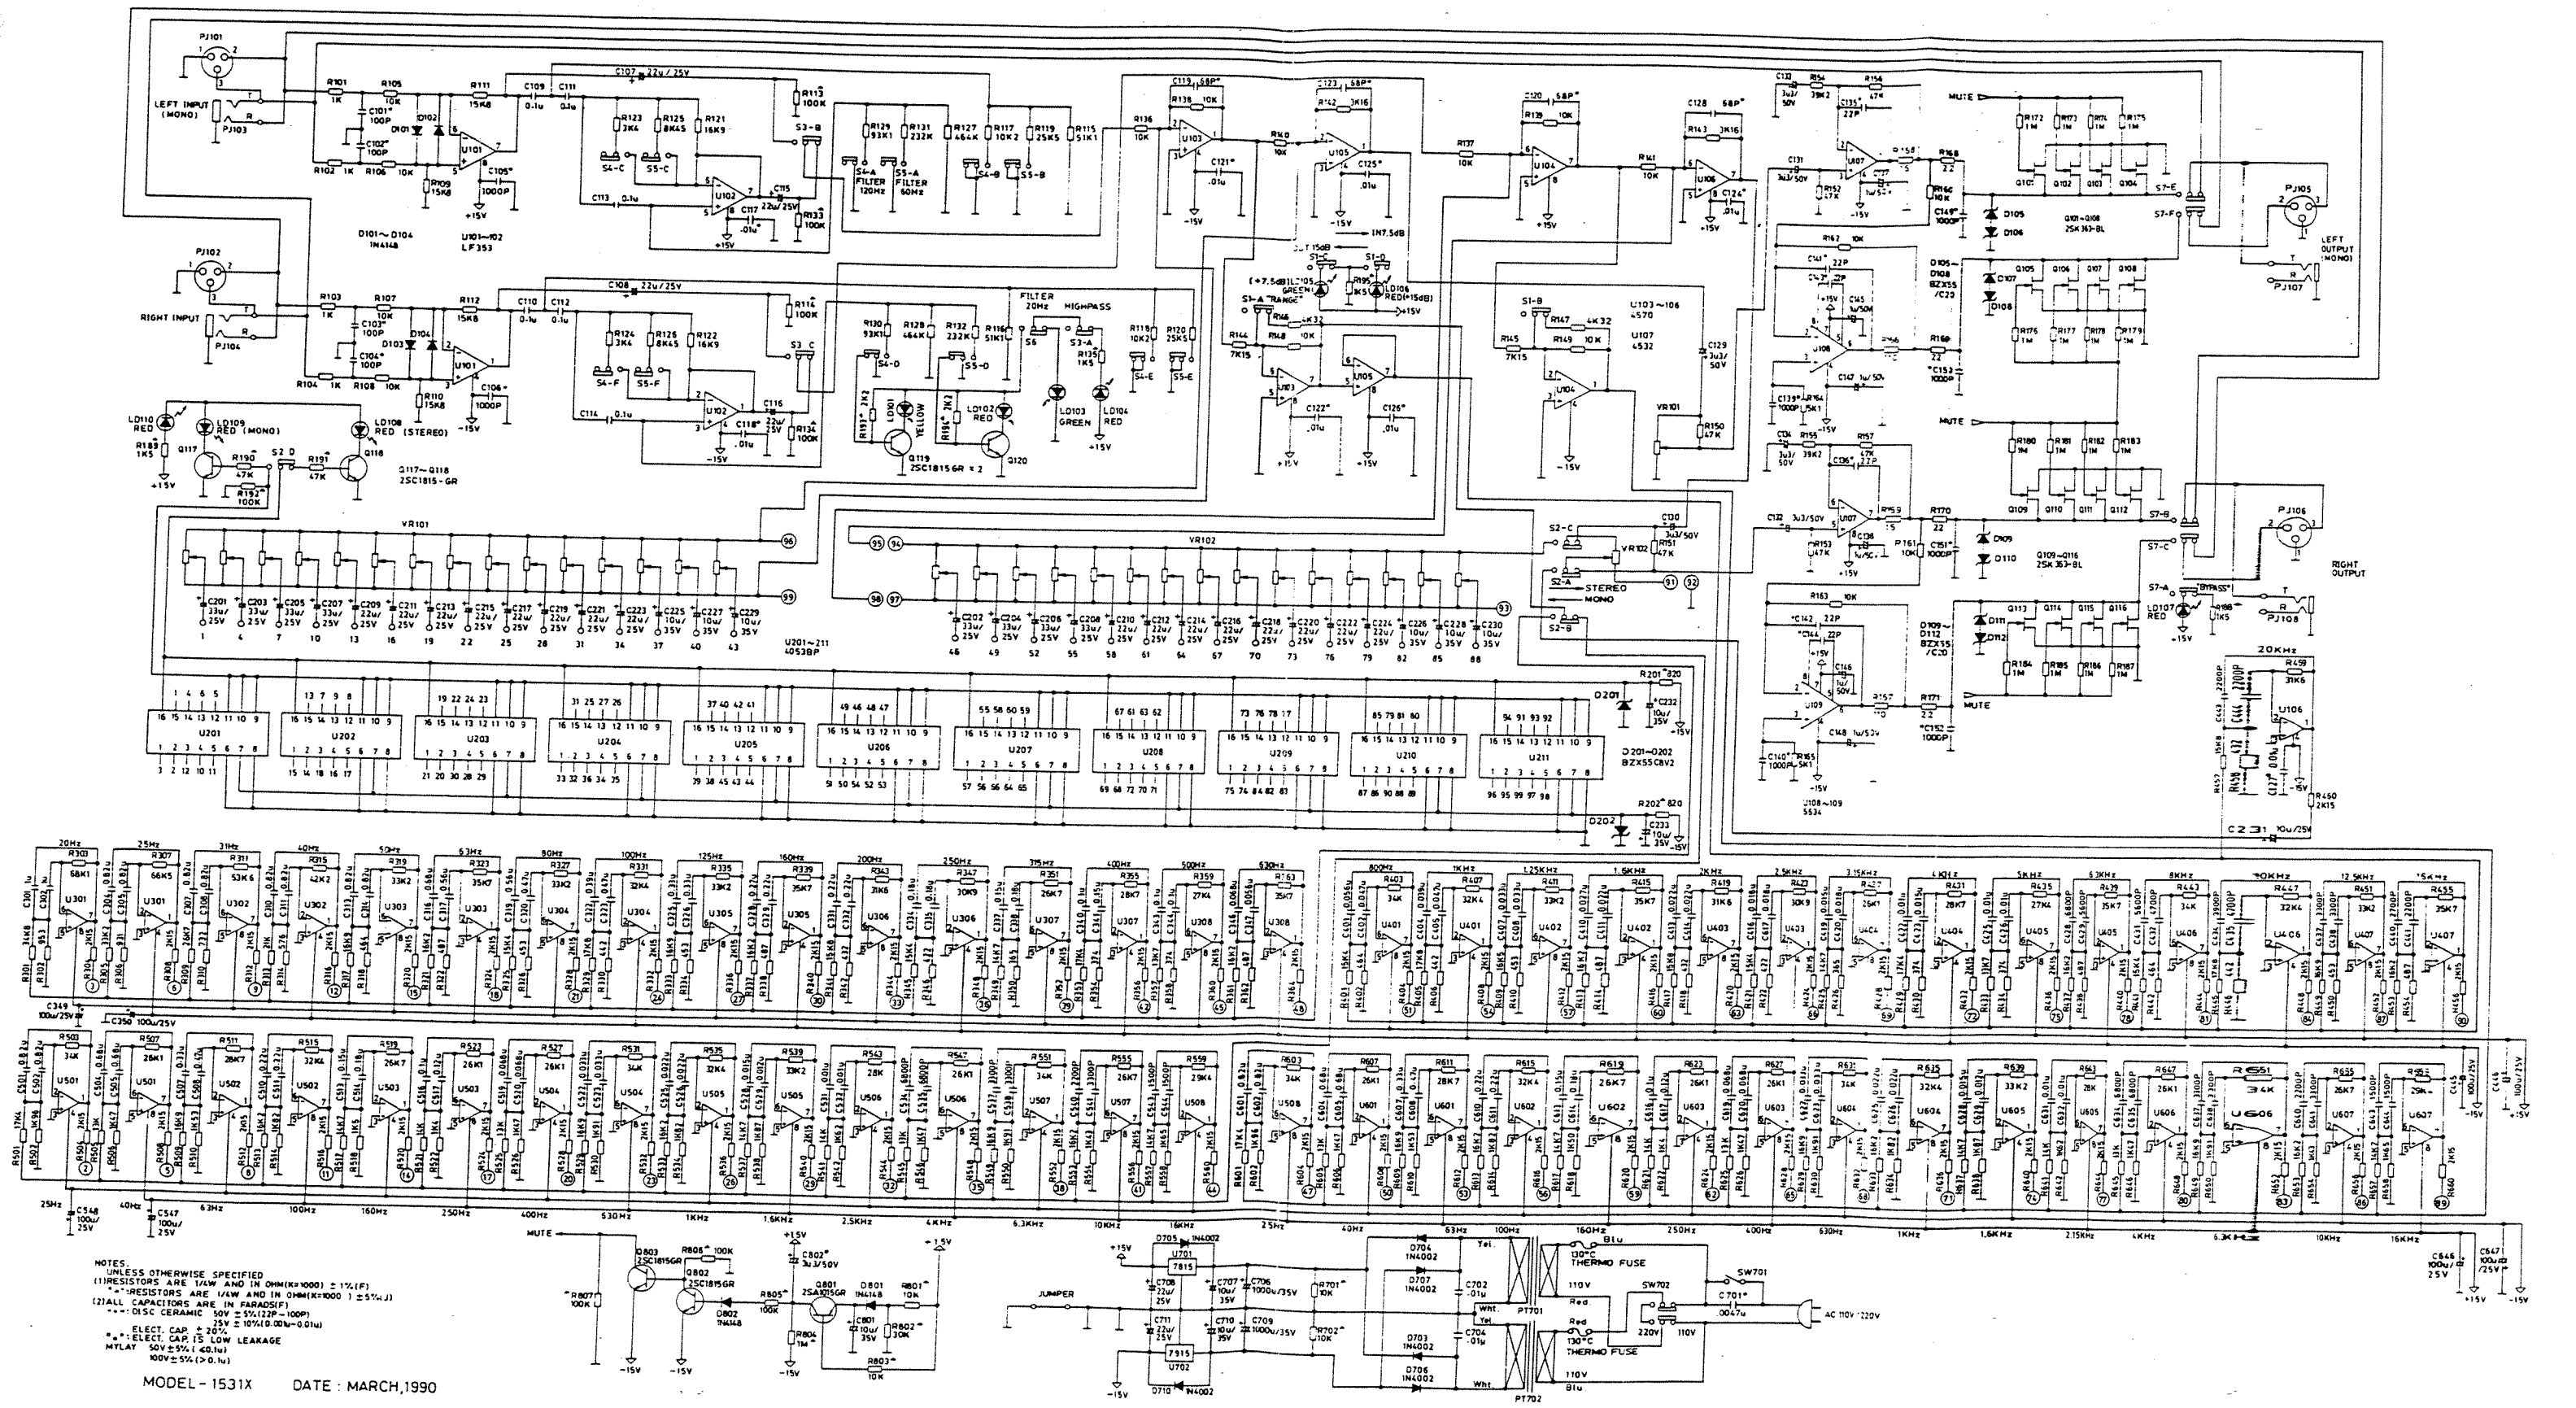

NOTES:
 UNLESS OTHERWISE SPECIFIED
 (1) RESISTORS ARE 1/4W AND IN OHMS(K=1000) ± 1%, (F)
 (2) RESISTORS ARE 1/4W AND IN OHMS(K=1000) ± 5%, (J)
 (3) ALL CAPACITORS ARE IN FARADS(F)
 (4) OSC CERAMIC 50V ± 5%, (2P-100P)
 (5) ELECT. CAP ± 20%
 (6) ELECT. CAP IS LOW LEAKAGE
 MTLAT 50V ± 5% (> 0.1u)
 100V ± 5% (> 0.1u)

MODEL - 1531X DATE : MARCH, 1990