


Data#: 3 File#: 60620207CA.EMI

Date: 2006-06-22 Time: 20:33:16

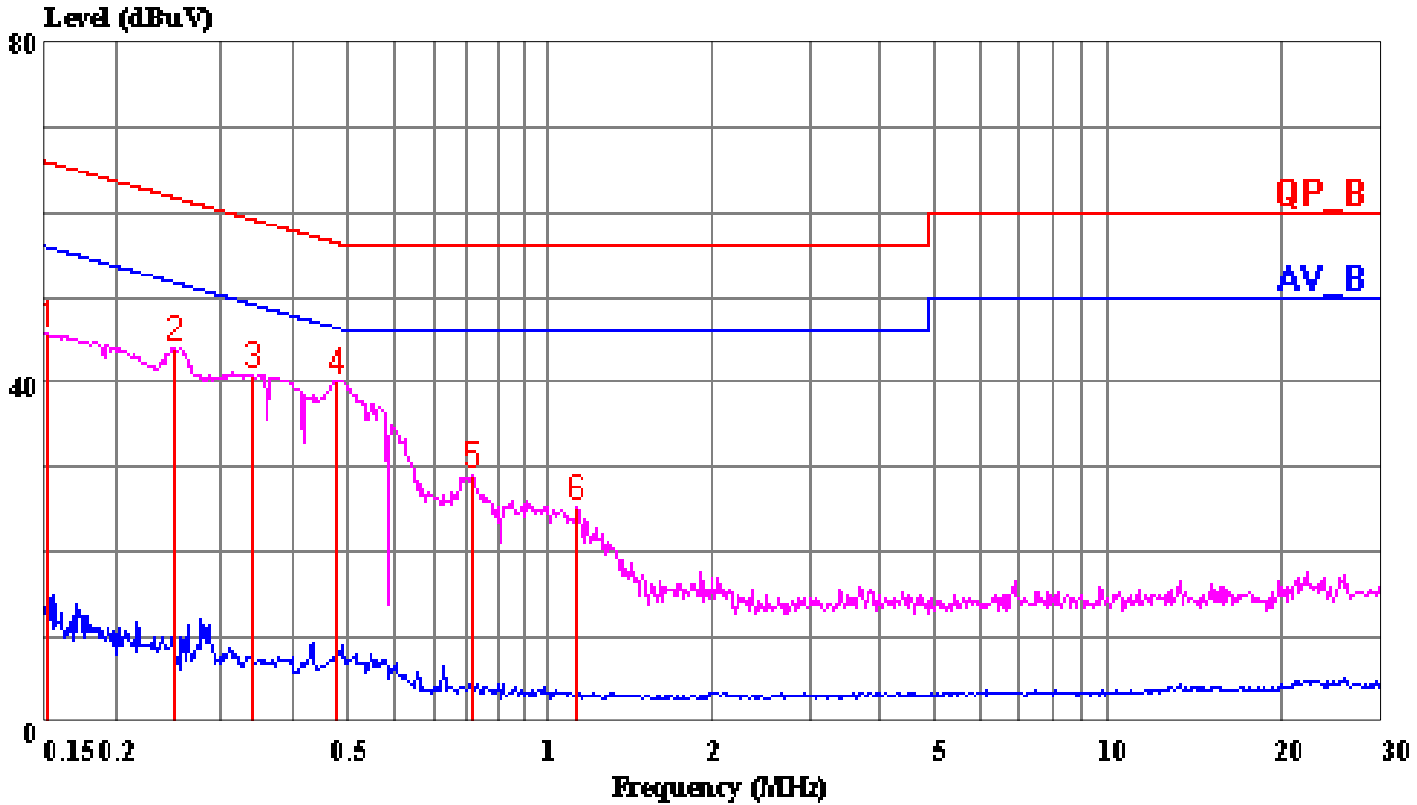

**(Conduction A)**

Trace: 2 1

Ref Trace:


Condition: LINE  
Report No. : 60620207  
Test Engr. : Alex Pan  
Company : Merry King Enterprises Co., Ltd.  
EUT : MKA-121000SA  
Test Config : EUT / ALL PERIPHERALS  
Type of Test: EN 55022 CLASS B  
Mode of Op. : 15VDC Full Load Mode / WORST

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.152	45.51	0.13	45.64	65.87	-20.23	Peak
2	0.251	43.71	0.14	43.85	61.73	-17.89	Peak
3	0.341	40.76	0.14	40.90	59.18	-18.28	Peak
4	0.479	40.13	0.14	40.27	56.36	-16.09	Peak
5	0.817	28.80	0.15	28.95	56.00	-27.05	Peak
6	1.236	25.08	0.16	25.24	56.00	-30.76	Peak

Data#: 9 File#: 60620207CA.EMI

Date: 2006-06-22 Time: 20:40:30

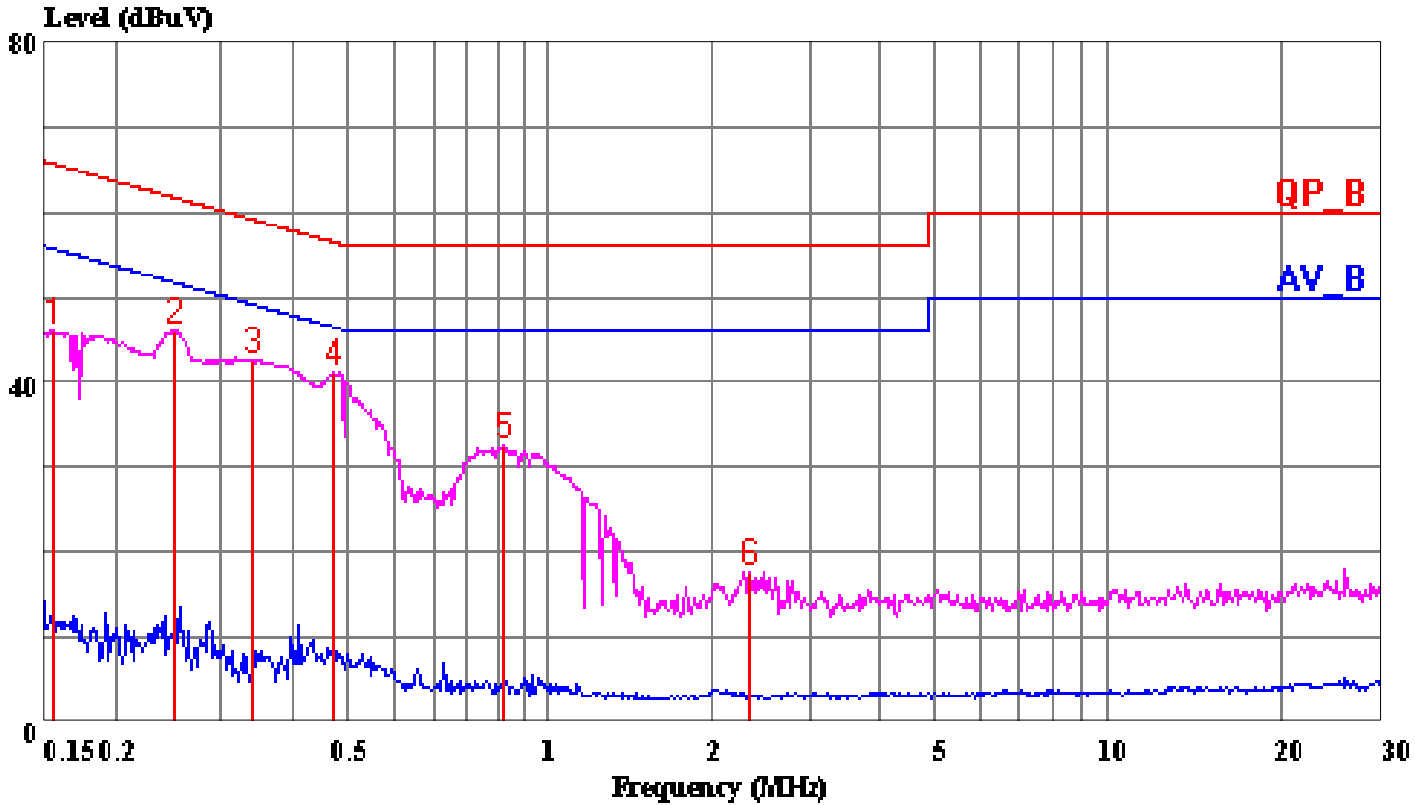

**(Conduction A)**

Trace: 8 7

Ref Trace:

Condition: NEUTRAL  
Report No. : 60620207  
Test Engr. : Alex Pan  
Company : Merry King Enterprises Co., Ltd.  
EUT : MKA-121000SA  
Test Config : EUT / ALL PERIPHERALS  
Type of Test: EN 55022 CLASS B  
Mode of Op. : 15VDC Full Load Mode / WORST

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.155	45.89	0.13	46.02	65.74	-19.72	Peak
2	0.251	45.91	0.14	46.05	61.73	-15.69	Peak
3	0.343	42.46	0.14	42.60	59.13	-16.53	Peak
4	0.471	41.07	0.14	41.21	56.49	-15.28	Peak
5	0.928	32.24	0.15	32.39	56.00	-23.61	Peak
6	2.461	17.52	0.22	17.75	56.00	-38.25	Peak



