


NOTES

1. RESISTANCES ARE SHOWN IN OHMS; K=1000 M=1,000,000.
2. CAPACITANCES ARE SHOWN IN MFD. UNLESS OTHERWISE NOTED P=MMFD
3. ALL RESISTORS ARE THE SOLID RESISTOR UNLESS OTHERWISE NOTED WITH THE FOLLOWING MARKS.
 ○ CARBON FILM RESISTOR
 ● METAL OXIDE RESISTOR
 ▲ HERMETICALLY SEALED RESISTOR
4. ALL CAPACITORS ARE THE DISC TYPE CERAMIC CAPACITOR
 50V OR 500V ○ 500V UNLESS OTHERWISE NOTED WITH THE FOLLOWING MARKS
 ○ OIL FILLED PAPER CAPACITOR; 500V, 1000V
 P PAPER CAPACITOR, 400V
 S POLYSTYRENE CAPACITOR
 N-M M POLYESTER CAPACITOR, N50V, M100V
 400V, M600V
5. TOLERANCES OF RESISTANCE ○ 5% OTHERWISE ±10%
 TOLERANCES OF CAPACITANCE ○ 5% OTHERWISE ±10% OR 20%
 RESISTORS WITHOUT WATTAGE INDICATION ARE 1/2 WATT OR 1/4 WATT
6. VOLTAGES ARE WITH SIGNAL
 ▲ NO SIGNAL
 THEY ARE MEASURED WITH 97VM



Panel L. Per
Electric Corp

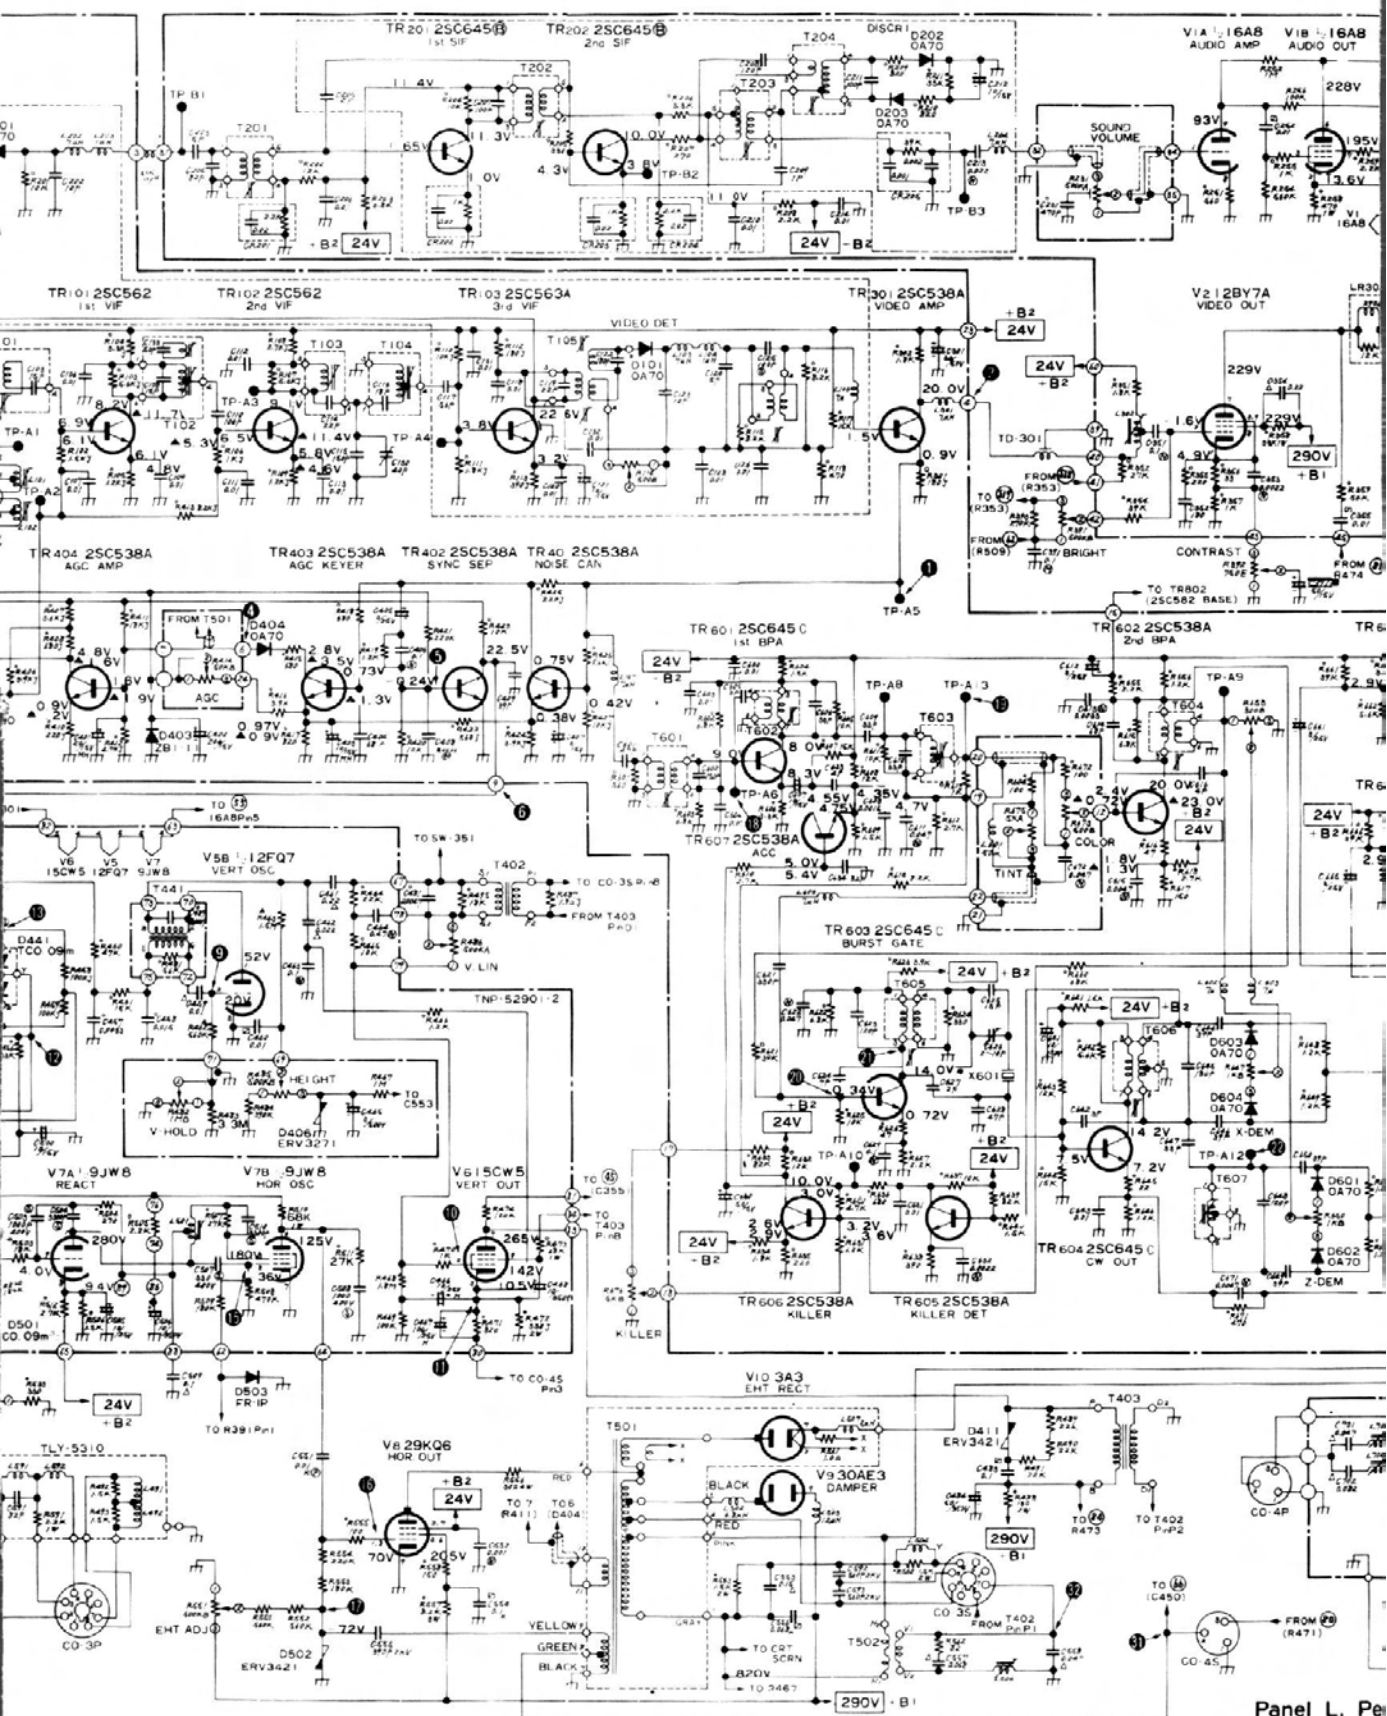