

Toward an Optimum Stereo Cartridge

HERBERT H. HOROWITZ*

The subminiature application of the ages-old principle of the gimbal results in an interesting and effective design for a stereo cartridge which comprises two d'Arsonval "meter" movements for its generating elements.

INDUSTRY AGREEMENT on the selection of the 45/45 cut for stereo disc recording, the release of demonstration discs, and the alacrity displayed by commercial recording companies in making stereo pressings available to the consumer, gave impetus and direction to engineering development of an optimum playback unit consistent with:

- (a) the design previously used for monophonic pickups;
- (b) feasibility of manufacture;
- (c) eventual consumer cost; and
- (d) a release target date—based upon a multiplicity of considerations, including: materials and components availability, required tooling change-overs, publicity timing, and established marketing channels.

These factors were undoubtedly accorded varying degrees of prominence in establishing organizational policy regarding the final product—consonant with the attitude of manufacturing, management, and sales divisions—toward what the public would accept. The prime motivator—consumer demand—had already, in large measure, been established.

Certainly, it had to be determined whether release was to be delayed until design effort had reached the *ultima Thule*, or limit engineering effort to the

* Chief Engineer, Electro-Sonic Laboratories, Inc., 35-54 Thirty-sixth Street, Long Island City 6, N. Y.

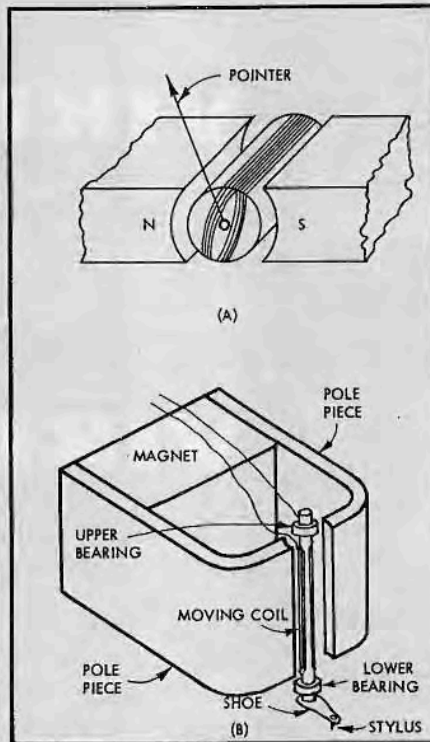


Fig. 2. (A) Diagram of a typical d'Arsonval meter movement, and (B) its adaptation as a phonograph pickup—the ESI C-60.

creation of a device adequate for the reproduction of present offerings by the recording industry—trusting that im-

provement in the quality of the recorded material would not obsolete the product within its probable life-span. Each manufacturing organization resolved the question according to its own experience and conscience.

Although both aesthetic and technical criticism have been leveled at some stereophonic pressings released within recent months, the improvement in both areas is already apparent. With the many types of stereo playback cartridges now available to the enthusiast (piezo-electric, moving magnet, moving coil, moving vane), the consumer may select a pickup compatible with his budget, or reflecting his listening tastes.

Evaluating the Design

To evaluate justly the design approach and the subsequent performance of a stereophonic cartridge, one ought to begin with an inherently perfect recording. Any inadequacy in the test disc would invalidate the test results or require "allowance for" when comparing several pick-up units. Assume that by some engineering sorcery, a flawless test recording could be prepared. The following technical conditions will have been met:

- (a) The material of the disc will have been infinitely plastic during cutting and will have attained surpassing hardness at the exact instant that the cutting stylus passed to the next point to be inscribed. The first condition is necessary to ensure that each miniscule excursion of the stylus is faithfully recorded, while the second requirement ensures that no subsequent distortion of the recorded undulation can ever result through stylus friction.
- (b) There is no unwanted coupling between input channels in any portion of the recording equipment.
- (c) As a corollary to item (b), no motion of the cutter stylus toward one groove wall has in any manner affected the opposing groove wall.
- (d) Accurate and properly balanced depth of cut represents precise intensity of channel information supplied.

Now, given a recording, faithful in all

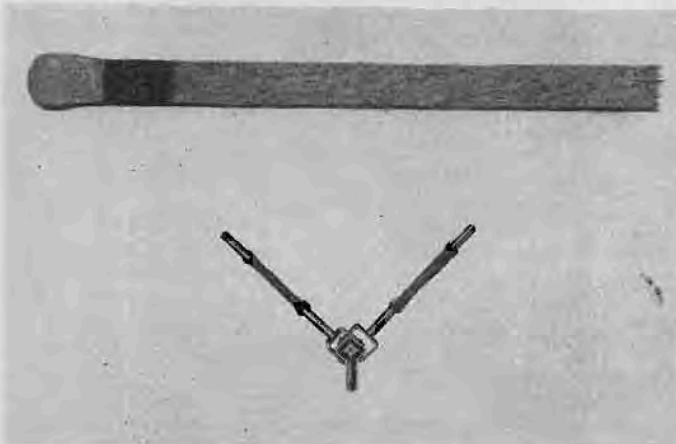


Fig. 1. Comparison in size between moving elements and book-type paper match, about 2-1/3 times actual size.

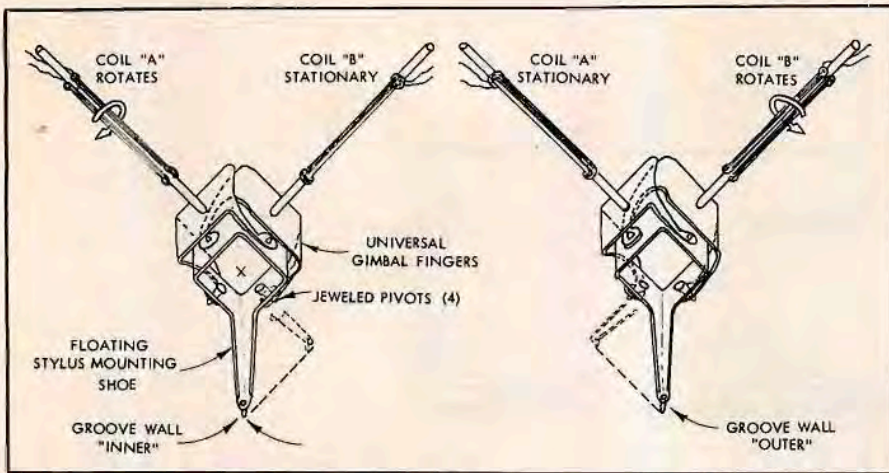


Fig. 3. Two d'Arsonval movements set at 45 deg. from the vertical and connected with the Gyro/Jewel coupling system.

details, will the playback result equal the quality of the recording? It should if the pickup is equally good.

Gyro/Jewel Design Approach

The ESL Gyro/Jewel stereophonic cartridge is, first of all, *not* simply a marketable redesign of a reproducer system originally developed for monophonic recordings. Design configurations which were eminently suitable to playback of monophonic recordings, when paired and rotated 45 deg. from the vertical, were found to have become considerably less competent performers on stereo recordings than their prototypes' rendition of monophonic discs.

Although we were convinced that the d'Arsonval generating movement offered the most desirable characteristics as the transducer element(s) for stereo reproduction as well as monophonic, the designs of many other domestic and foreign laboratories were scrutinized to determine the capabilities of their products.

Experimental models of competitive units were carefully constructed by ESL engineers and technicians and were then exhaustively tested, measured, and evaluated both by the use of laboratory test gear and in listening tests.

Not to be stamped into preliminary

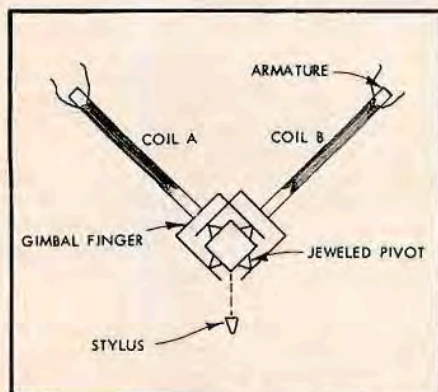


Fig. 4. Simplified mechanical diagram of coupling system.

freezing of production designs, the entire organization agreed that no stereo pick-up would be released until the valid approach had been determined: one which would embody all the desirable features necessary to an ideal system, and would yield a device that could be produced with consistent quality. Early experimental units were devised with two d'Arsonval movements mounted at 45 deg. from the vertical (thus forming an angle of 90 deg. with each other). Incidentally, throughout the development, the accuracy of this angle was found to be an exceedingly critical factor in maintaining satisfactory inter-channel separation and constancy of generator output. The two armatures were yoked together and fitted with a stylus. Much valuable information was derived from this approach before the scheme was discarded as furnishing a fallacious solution. *Figure 6* shows one early model.

In our opinion, every indication pointed to the d'Arsonval movement as the superior generating element for the application. The movement could be built to have an exceedingly small mass; it is inherently linear, as a characteristic of the constant location of the coil in the flux concentration between the magnet pole-pieces and its rotational motion about its own axis in the fixed magnetic field; and it could be made to generate adequate output with the necessarily small rotational movements of the coil.

In *Fig. 2*, (A) is a simplified line diagram of a typical d'Arsonval movement, while (B) shows the application of the principle to a monophonic pick-up, the ESL-C60 Series cartridge. Two similar systems were devised, and mounting assemblies designed to hold the armature axes at exactly 45 deg. from the vertical and at precisely 90 deg. from each other. The functioning of the movements is shown in *Fig. 3*.

As shown in the diagram, latex mounting blocks hold the armature core so that only *rotational* motion of the coils can occur. This mounting not only exhibits

mechanical stability, but further, inhibits any possible electrical non-linearities resulting from coil shift out of the maximum flux density area between the magnet pole-pieces. As the latex blocks do not slide on the armature, rotational friction is non-existent.

In order to provide generating elements which would be of sufficiently small mass and yet develop a usable output, a wire having cross section diameter of approximately 1/1000 in. was needed. Obviously, copper "magnet" wire could not be used for this application—a copper filament of this diameter would have almost no physical rigidity, and would probably disintegrate upon handling.

In order to wind coils using a wire of this diameter, a special precious-metal alloy conductor was developed. This almost microscopic conducting filament—about one-third the diameter of a human hair—could not be mounted in the pick-up on a bobbin. Even the smallest of bobbins would have increased the mass and physical dimensions of the system to intolerable limits. The 60-turn coils are wound, shaped, and mounted directly on a rigid armature shaft, which is then assembled in the armature holder between the latex holding blocks.

A solid armature shaft was selected in preference to a tubular component. The difference in effective mass between the two would have been completely negligible. The probability of encountering concentricity problems in manufacturing and mounting would have been disproportionately increased, while the flux saturation of the smaller cross-sectional area of the armature material would have restricted output.

The magnet/pole-piece assembly is worthy of note, too, in that precision grinding is employed at the area of juncture. The pole-pieces are screw-clamped rather than soldered, as the possibility exists in production that during soldering, capillary flow of the solder might result in an air gap—materially reducing the effective flux density through the coil mounting area.

Coupling the stylus to the two armatures requires a reliable linkage having the ability to differentiate completely between stylus motion in the two planes of motion. The linkage design must be such that instantaneous motion in the desired direction is unrestricted. Mechanical coupling between systems must be prevented or made ineffective. A short, rigid stylus bar would be desirable to further reduce system inertia (the effective mass increases as the square of the distance from the point of applied force). The linkage should be free of any self resonance within the audible frequency range to prevent distortion in frequency linearity.

The development of a stylus arm and



Ralph Bellamy, starring in "Sunrise At Campobello", listens to stereo on his Collaro changer and Goodmans Triaxonal Speaker System.

Collaro—your *silent* partner for Stereo

Stereo records are here. And once you listen you'll discover there's no more exciting way of listening to music. But the new stereo cartridges are unusually sensitive to turntable and changer noise. *Silence* is the requirement and silent performance is what you get when you select Collaro — the one four-speed changer truly precision-engineered to meet the rigid quality demands of stereo. Here are some outstanding Collaro features:


A. Five-terminal plug-in head. (Exclusive with Collaro.) By providing two completely independent circuits, the new five-terminal head guarantees the ultimate in noise-reduction circuitry — a vital need for stereo reproduction.

B. Counter-balanced, transcription-type tone arm. Another Collaro exclusive. Stereo cartridges require light tracking pressures. As records pile up on a changer, tracking pressure of a conventional arm tends to increase. Result may be damage to records or cartridge. This *cannot happen with the Collaro counter-balanced arm* since it varies less than a gram in pressure between the top and bottom of a stack of records. The arm will accept any standard stereo

or monaural cartridge and it has no spurious resonances.

C. Motor. Dynamically balanced and so rigidly mounted that wow and flutter specifications are superior to any changer in the world. (.025% at 33 $\frac{1}{3}$ RPM)

There are many other features which make Collaro your best buy in a stereo or monaural record changer. All are described in a free catalog. (See below.) There are three Collaro changers priced from \$38.50 to \$49.50.

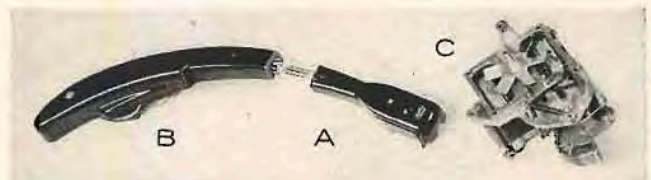

For full information on Collaro stereo and monaural changers — write to Rockbar Corporation, Dept. A10C, Mamaroneck, N. Y.



American Sales Representative for Collaro, Ltd.

coupling "shoe" along with the attaching yokes for converting the angular motion of the stylus to rotational motion for the d'Arsonval generators resulted in a straightforward, essentially friction-free design, with inherently low mass and minimum response to any but the desired motional mode.

The final design adopted employs four jeweled pivots for attaching the stylus shoe to the armatures of the d'Arsonval generators. Figure 4 is a simplified mechanical diagram of the assembly.

As the stylus is influenced by the undulations of the record groove—in Fig. 3—angularly, to the left, the armature of generator A is caused to describe a corresponding rotary motion, while that of generator B, restricted by the armature mountings is unaffected by this excursion of the stylus.

By reason of the friction-free jewel pivots attaching the shoe to system B, no restriction is offered to the movement of the system A armature, nor is any of the angular motion of the stylus as it moves to the left transmitted to the armature of system B.

When the excursion of the stylus is to the right, the opposite effect takes place and the armature of system B is caused

to rotate. In this instance, no motion is coupled to system A.

The yokes—which serve the dual purpose of coupling stylus motion to the armatures of the generators and supporting the stylus shoe assembly (the universal gimbal fingers at the jeweled pivot points)—possess the necessary qualities of rigidity to prevent deformation under stress, and the hardness to resist wear at the pivot points.

The clamping action of the gimbal fingers on the jeweled pivots—a quality of the resiliency and mechanical design of the yokes—provides a mounting which will remain secure even under conditions of unusual mechanical shock, yet retain the ability to swing freely.

Cartridge Performance

Response tests of the ESL Gyro/Jewel cartridge show that no mechanical resonances occur in the audible range. This condition, coupled with the natural linearity of the generator system, permits the over-all response of the cartridge to remain flat within ± 2 db over the frequency range from 30 to 15,000 cps on presently available stereo test discs, which are restricted to this range. When playing conventional mi-

crogroove test records, the frequency response extends to well beyond 20,000 cps.

The complex motion to which the system must respond in the 45/45 system is applied at an angle of 45 deg. to the vertical. To achieve unrestricted response to this angular mode of motion, the measured vertical and lateral compliance should be essentially equal (the resultant vector angle of two equal forces acting at right angles being 45 deg). By accurate assembly methods and precision manufacture, the production cartridge has vertical and lateral compliances equal, with a value of 5×10^{-6} cm/dyne or greater.

By reason of the extreme miniaturization of the moving components of the reproducer system(s), the dynamic mass of the ESL Gyro/Jewel stereo cartridge is held to a value of 2 mg. The high compliance and low dynamic mass contribute greatly to reduced record wear.

A stylus force of six grams on the 0.7 mil stylus used for stereo playback results in record wear as great as a tracking force of twelve grams on the 1.0 mil stylus used for monophonic pickups. In an arm of proper design, a tracking force of two or three grams is

(Continued on page 58)

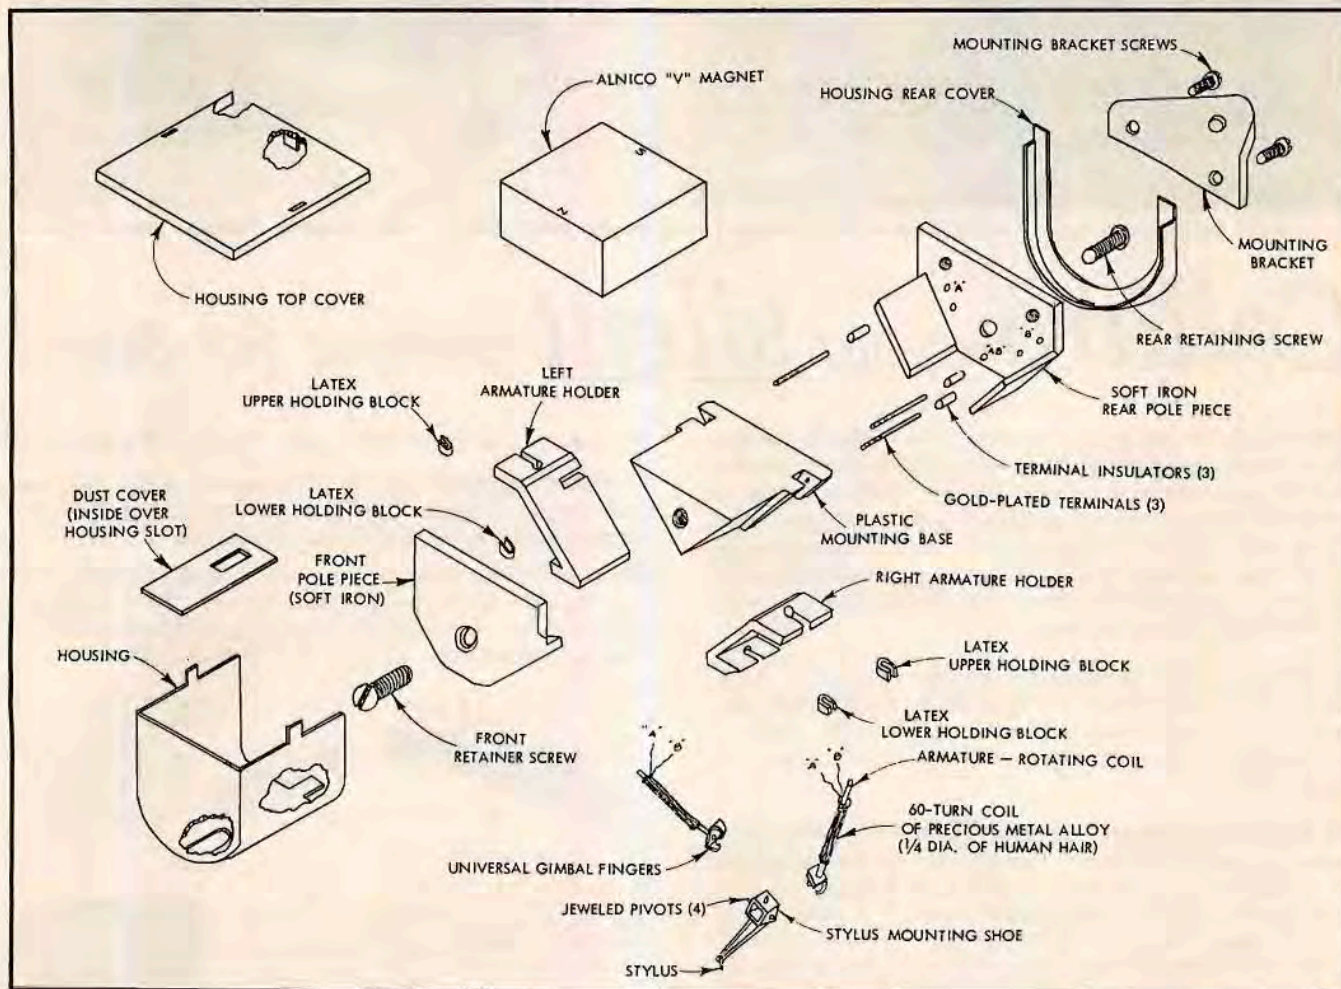


Fig. 5. Exploded view of the complete cartridge.

This Man is Using an Electronic Crystal Ball

The H. H. Scott advance development team must foresee the future. They must design new products so that they stay current for many years. Hermon Hosmer Scott insists on this as a protection to your investment.


The new 130 Stereo preamp is an example of the way Scott engineers work ahead. Engineering of this brand new product was started when stereo was nothing more than a hobbyist's delight. This allowed time for thorough testing of its many advanced features.

Every H. H. Scott component is designed to defy obsolescence. Careful planning, fine engineering, exceptional quality mean your investment in the new H. H. Scott stereo-preamp . . . or any H. H. Scott product . . . is an investment in a component that will still be up-to-date many years from now.



17 reasons why you should buy the

New H. H. Scott Stereo-Preamp

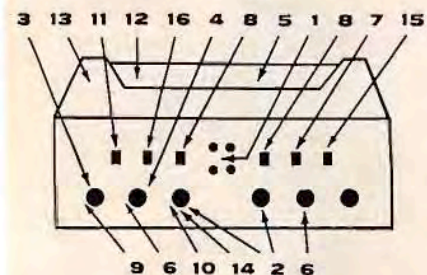

1 Visual signal light display panel shows mode of operation at a glance. 2 Completely separate bass and treble controls on each channel so that different speakers may be matched. 3 Play stereo from any source — Records, FM-AM Tuner, Tape. 4 Reverse channels instantly, or play monaural from any source through both channels doubling your power. 5 Play Trereo — a center channel output lets you use your present speaker as a middle channel. 6 Special circuitry lets you balance channels quickly and accurately. 7 Reverse the phase of one of your channels 180 degrees instantly. Lets you correct for improperly recorded tapes. 8 Separate 12 db/octave rumble and scratch filters. 9 Complete record equalizer facilities.

10 Use as an electronic crossover at any time. 11 Two stereo low-level inputs. You can connect both a stereo phono pickup and stereo tape head. 12 Stereo tape recorder inputs and outputs. 13 Provision for operating stereo tape heads without external preamps. 14 Quick-set dot controls allow any member of your family to use equipment. 15 Loudness-volume switch. 16 Stereo tape monitor switch. 17 The exceptional quality of all H. H. Scott components . . . PLUS all the features and specifications long associated with H. H. Scott monaural preamplifiers.

Sensitivity $1\frac{1}{2}$ millivolts on tape head input, 3 millivolts on phono for full output. Hum level 80 db below full output on high level outputs. Size in accessory case $15\frac{1}{2}w \times 5h \times 12\frac{1}{2}d$. Model 130. Price \$169.95 (\$172.95, West of Rockies).



Write for complete technical specifications and new catalog A-10.



H. H. SCOTT, INC., 111 POWDERMILL RD., MAYNARD, MASS.
EXPORT: TELESCO INTERNATIONAL CORP., 35 W. 40TH ST., N. Y. C.

CARTRIDGE

(from page 48)

sufficient to permit the Gyro/Jewel stereo pick-up to follow all groove undulations accurately. The manufacturer recommends that tracking force should not exceed four grams, as greater vertical force not only increases record wear, but set up mechanical biasing effects leading to unbalance in the response pattern.

Channel Separation

If stereophonic reproduction is to be effective, separation of channels must be as complete as possible *throughout the entire frequency range*. In stereo reproducer systems which depend upon elastic damping of any sort to remove mechanical resonances, the danger exists that at one end of the frequency spectrum or the other (possibly both), or at indeterminate frequencies elsewhere in the spectrum, some mechanical coupling between channels may take place.

Early efforts at recording showed evidence of this undesired interchannel coupling. Where channel separation of about 20 db was measurable at frequencies from 1000 to 5000 cps, this separation had dwindled to some 5 db at 10,000 cps.

The undamped design of the ESL Gyro/Jewel stereo cartridge system precludes such variations in channel separation/frequency response ratio. Channel separation is maintained at a constant 20 to 25 db over most of the audible range. Moreover, the design is such that factory adjustment of the two d'Arsonval movements, by means of eccentric screws, permits optimum cross-talk ratios.

A mean output level of approximately two millivolts per channel is developed at a stylus velocity of ten centimeters per second. Highest quality voltage step-up transformers to the stereo preampli-

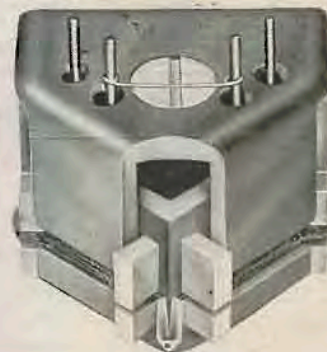


Fig. 6. An early design having direct channel separation by means of a bifurcated stylus shoe. Discarded because of inadequate separation above 8 kc.



SUPERB FOR STEREO

... and better than ever for monaural records

When it comes to the selection of a record changer to meet the exacting requirements of both modern stereo and modern high fidelity monaural records — there is only one choice, the GS-77.

From the day this modern record changer was born, strict adherence to rigid precision standards and advanced engineering made it the ideal high fidelity record changer. Now, new features have been added to make it the ideal stereo changer. An easily accessible stereo-monaaural switch directs the stereo signal to the proper speaker. On monaural records, it provides a signal to both speakers adding extra depth. A double channel muting switch assures complete silence at all times except when the stereo record is being played. New GS-77 quick-change cartridge holder makes it easy to change from stereo to monaural cartridge with the turn of a knob.

Other GS-77 features assure the finest reproduction, stereo or monaural. The tone arm exhibits no resonance in the audible spectrum, and virtually eliminates tracking error. The arm counter-balance is so designed that stylus pressure between the first and tenth record in the stack does not vary beyond 0.9 gram. These characteristics virtually eliminate vertical rumble — to which stereo is sensitive. Turntable pause eliminates the grinding action which takes place where records are dropped on a moving turntable or disc — protecting the delicate stereo record grooves.

The GS-77 is the perfect record changer for stereo as it is for monaural high fidelity. \$59.50 less cartridge and base. Hear it at your hi-fi dealer, or write for complete details: Glaser-Steers Corp., 20 Main St., Belleville 9, N. J. In Canada: Alex L. Clark, Ltd., Toronto, Ontario. Export: M. Simons & Sons Co., Inc., New York City.

new

GLASER-STEERS GS-77

the modern record changer

Weathers Originals set new highs in performance

Weathers products are not copies, adaptations, or mere improvements over other Hi Fi components or systems. Unfettered by precedent, Weathers equipment is designed on bold new principles which add astonishing quality and brilliance to Hi Fi reproduction.

Weathers Pickups

FM Monaural • FM Stereo • Ceramic Stereo • All Weathers pickups play both monaural and stereophonic records without damage. All are available with diamond or sapphire styli. **FM Monaural** and **FM Stereo** cartridges are designed only for the Weathers Tonearm in which an oscillator develops the signal. They track at 1 gram... cannot damage records. They have exceptionally wide frequency range, low intermodulation, low cross modulation, and low harmonic distortion. **The Weathers Ceramic Stereo Cartridge** fits all other tonearms and is superior to any magnetic pickup. Tracks at 2 grams. Complete absence of hum. 25 db separation between channels.

The Weathers Micro Touch

Tonearm is designed exclusively for the Weathers FM Pickups. It is light and so perfectly balanced that accurate levelling of turntable is unnecessary. Shock mounting isolates it from outside vibrations. Viscous damping prevents tonearm resonance down to 15 cps.

The Weathers Oscillator-Modulator

Transforms the impulse from the pickup and produces the FM signal. Signal-to-noise ratio is considerably higher than that of the best magnetic pre-amps.

The Weathers Turntable is unquestionably one of the World's finest. Exceptionally light construction eliminates the mechanical noises inherent in heavy turntables. Noise level is 25 db lower than that recorded on today's best records. Shock mounting eliminates floor vibrations. A cool running 12-pole synchronous motor brings the platter up to correct speed in $\frac{1}{4}$ of a revolution and maintains correct speed regardless of variations in load or line voltage. Cueing features make the Weathers Turntable ideal for broadcasting station use. \$59.95. Also available in kit form, without base or mounting plate, \$34.50.

The Weathers Discusion suspends any size record on its outer rim and protects playing surfaces from dust and contamination. Only \$2.95.

Weathers Stylus Gauge

A simple and accurate way to measure and control exact tracking force. Makes records last longer—sound better. Priced at only \$2.00.

Four Superb Speaker Systems

The Fiesta, Decorator, Monte Carlo, and Barrington fill every need from den to concert hall. From \$59.95 to \$510.00.

See your dealer or write for booklet number 658A.

Weathers Industries

DIVISION OF ADVANCE INDUSTRIES, INC.

66 E. Gloucester Pike, Barrington, N. J.

Export: Joseph Plasencia, Inc., 401 Broadway, New York, N. Y.

fier inputs prevent degradation of the signal quality.

Installation Factors

An adaptor plate is supplied as a part of the mounting hardware for the ESL Gyro/Jewel cartridge so that it can be mounted in any standard phono arm or record changer. For optimum results, it is recommended that the arm used be rotationally balanced as well as laterally balanced. Lateral and rotational balance can be achieved only in an arm whose stylus force adjustment is independent of the arrangement for counterbalancing the mass of the cartridge in the arm head.

A perfectly level turntable is not unattainable, and is desirable in order to reduce any tendency for one side of the stereo groove to be favored over the other. Even with a perfectly level turntable, slight warp in a disc can create similar problems on playback.

Because of the complicated series of motions described by the stylus in stereo playback, more serious reproduction faults are detectable when playing warped records than under similar conditions during monophonic playback. In stereo reproduction, interchannel separation is degraded, IM distortion rises, frequency response characteristics are likely to bounce out of specifications, and listening pleasure is markedly reduced.

A new playback arm has also been developed: one which through its design permits realization of the advantages of the Gyro/Jewel stereo cartridge. In order to reduce the need for exact levelling of turntables and to prevent degradation of the output signal quality when encountering warped discs, the tubular member of the ESL Gyro/Balance arm is displaced laterally. This configuration permits rotational balance through the point of effective mass of the head assembly, the lateral pivot, and the counterbalance weight.

Actually, with the Gyro/Balance arm, it is quite possible to play discs at any angle to the horizontal up to 90 deg. *without degrading the stereo channel separation ratio.* All vertical and horizontal pivots are precision ball bearings.

The zero-balance counterweight is used to accomplish exactly that for any cartridge used. Stylus force is then separately adjusted, by rotating a knurled knob on the side of the bearing gimbal against a spring. This arrangement allows for infinite stylus force adjustment, within the recommended range for the cartridge in use. Although developed for stereo use, this arm also works improvement on the playback of monophonic discs.

Enhanced Stereo Listening

The advent of stereo disc recording is

Actually, with the Gyro/Balance arm, it is quite possible to play discs at any

WEATHERS TECHNICAL MAGIC IS SOUND

perhaps as great a step forward in recreating the effect of "presence" when listening to recorded music, as was the introduction of the full-fidelity micro-groove recording a few years ago. The listening public has become accustomed to the experience of clean full-range—both frequency and dynamic—reproduction from good monophonic discs, and is sure to demand equal quality from stereo discs.

Æ