




CONTROL NOTES: EXAMPLE  
 (SYNC-M1000-REC) REFERS TO THE SYNC  
 ENABLE SWITCH ACTIVATED, THE 50/1000  
 HZ SWITCH IN THE 1000 HZ POSITION, AND  
 THE TRANSPORT RECORD/PLAY SWITCH  
 IN RECORD.

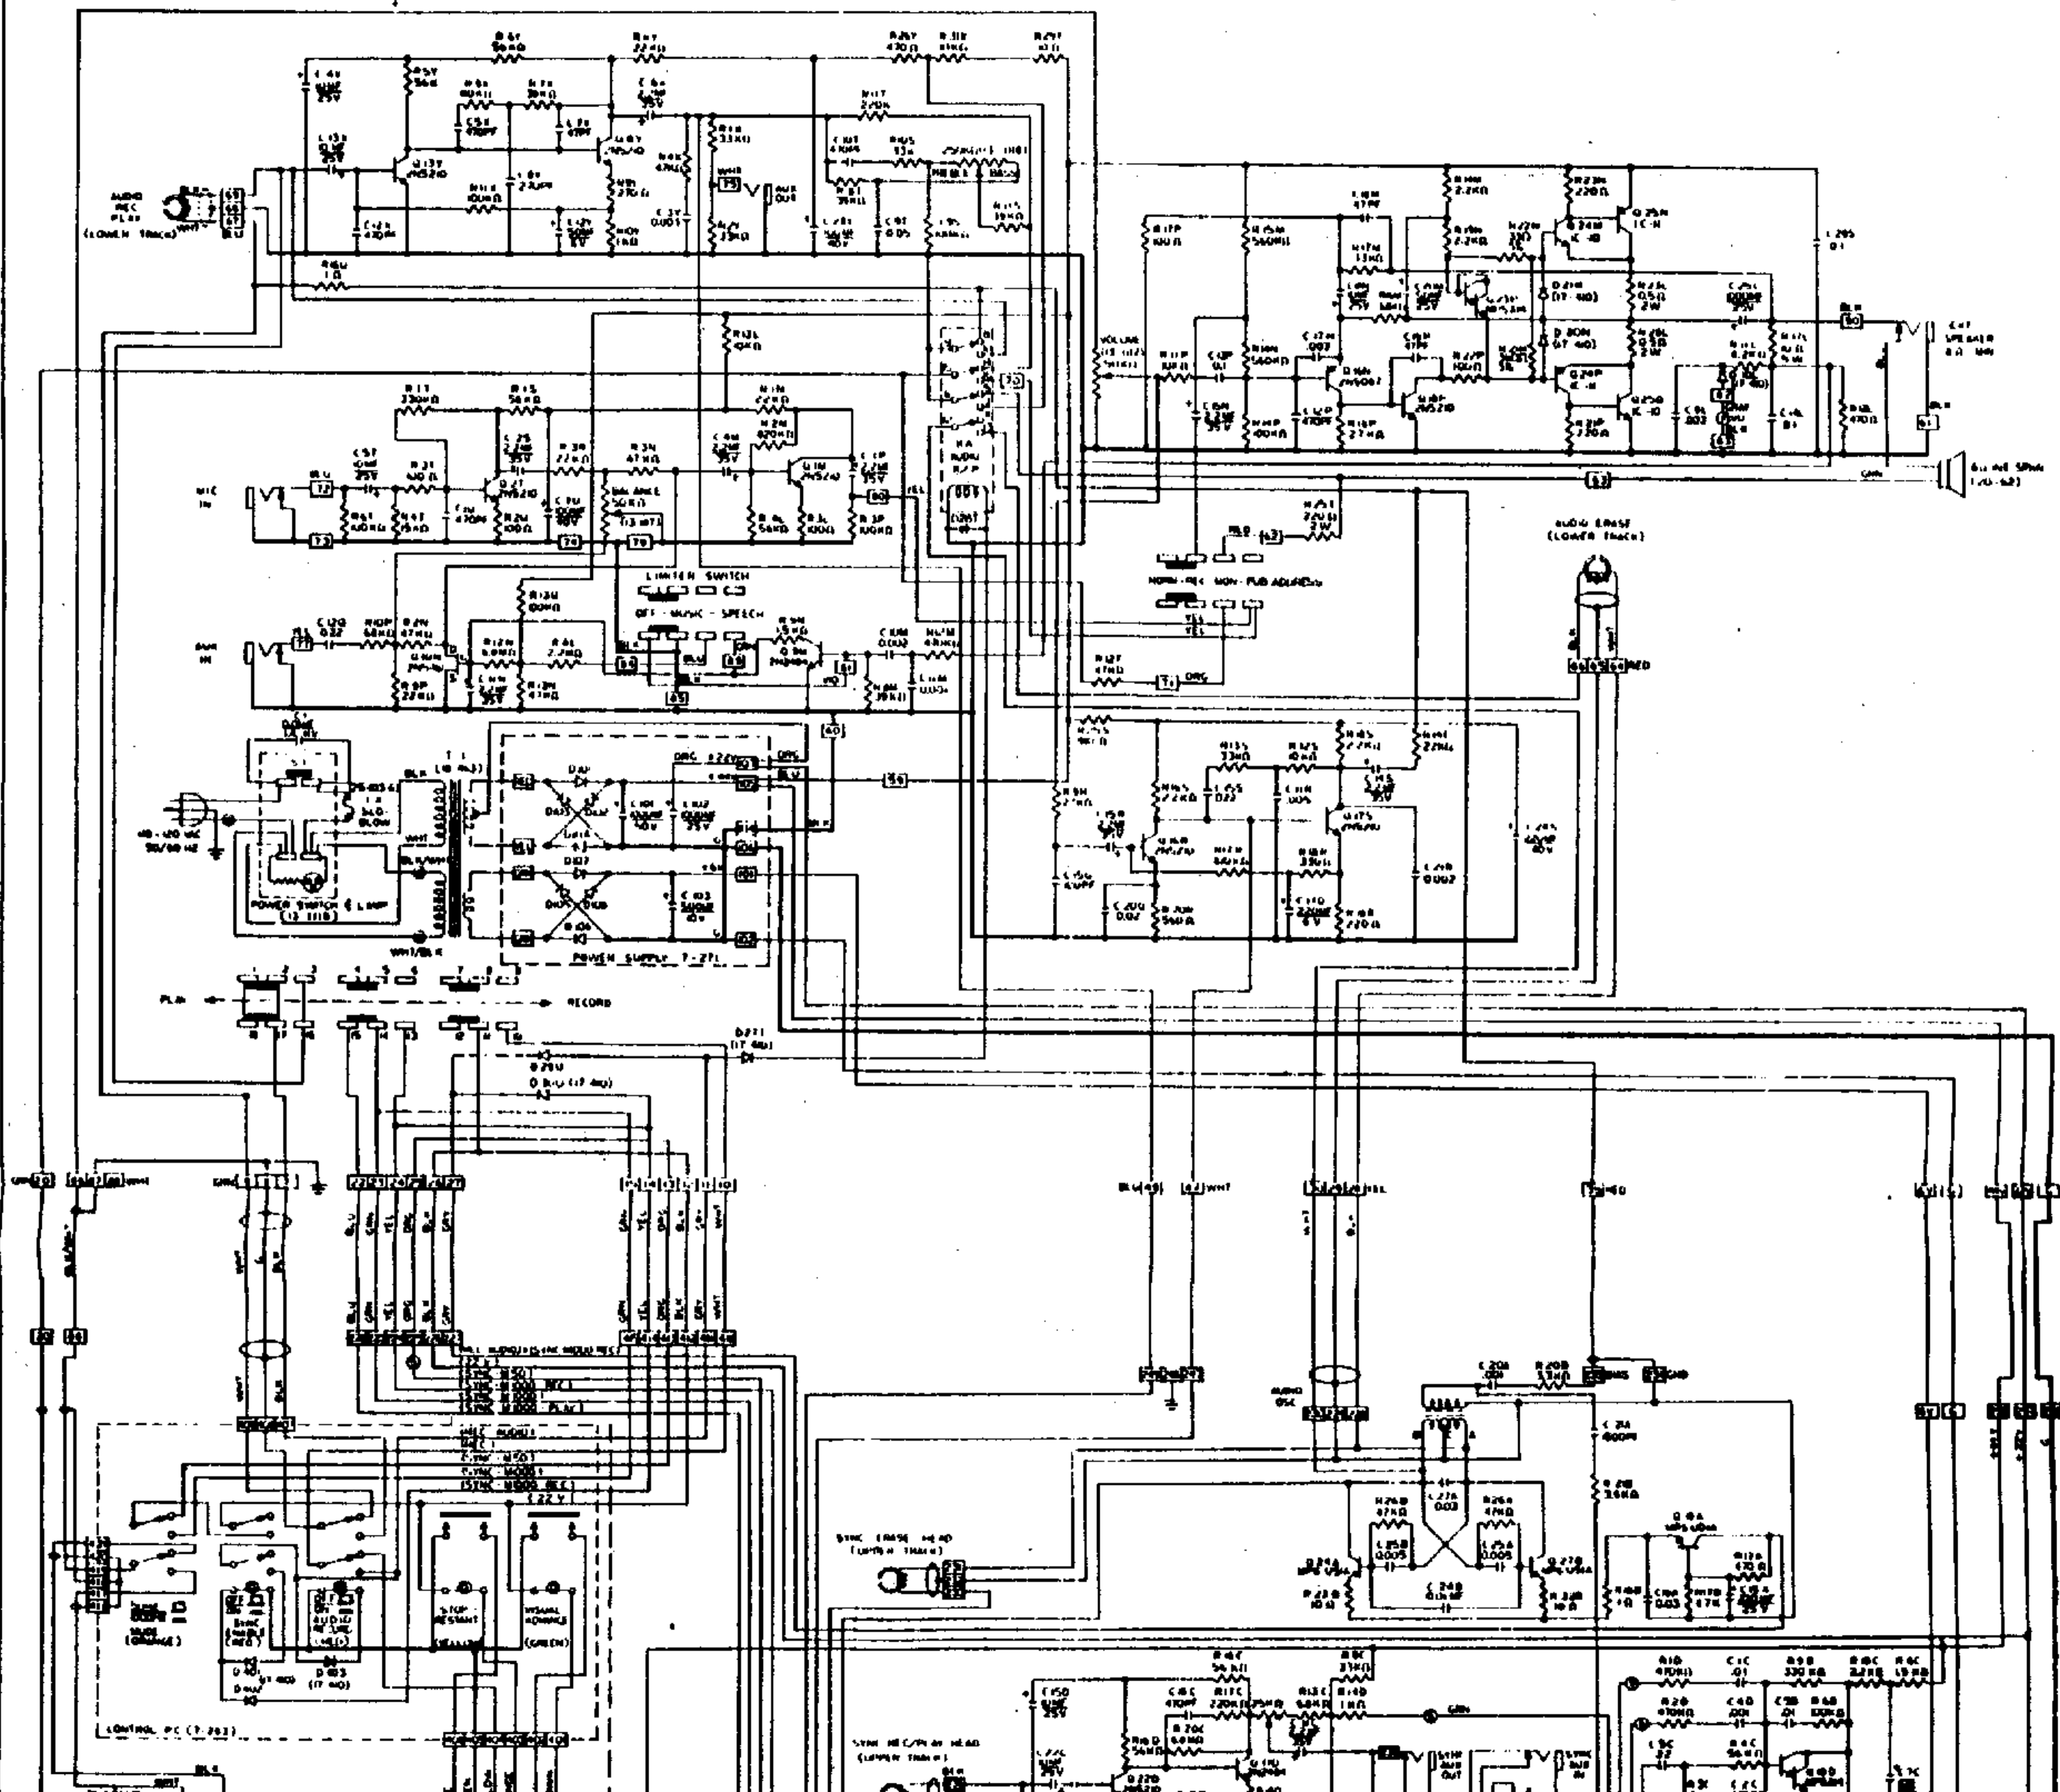

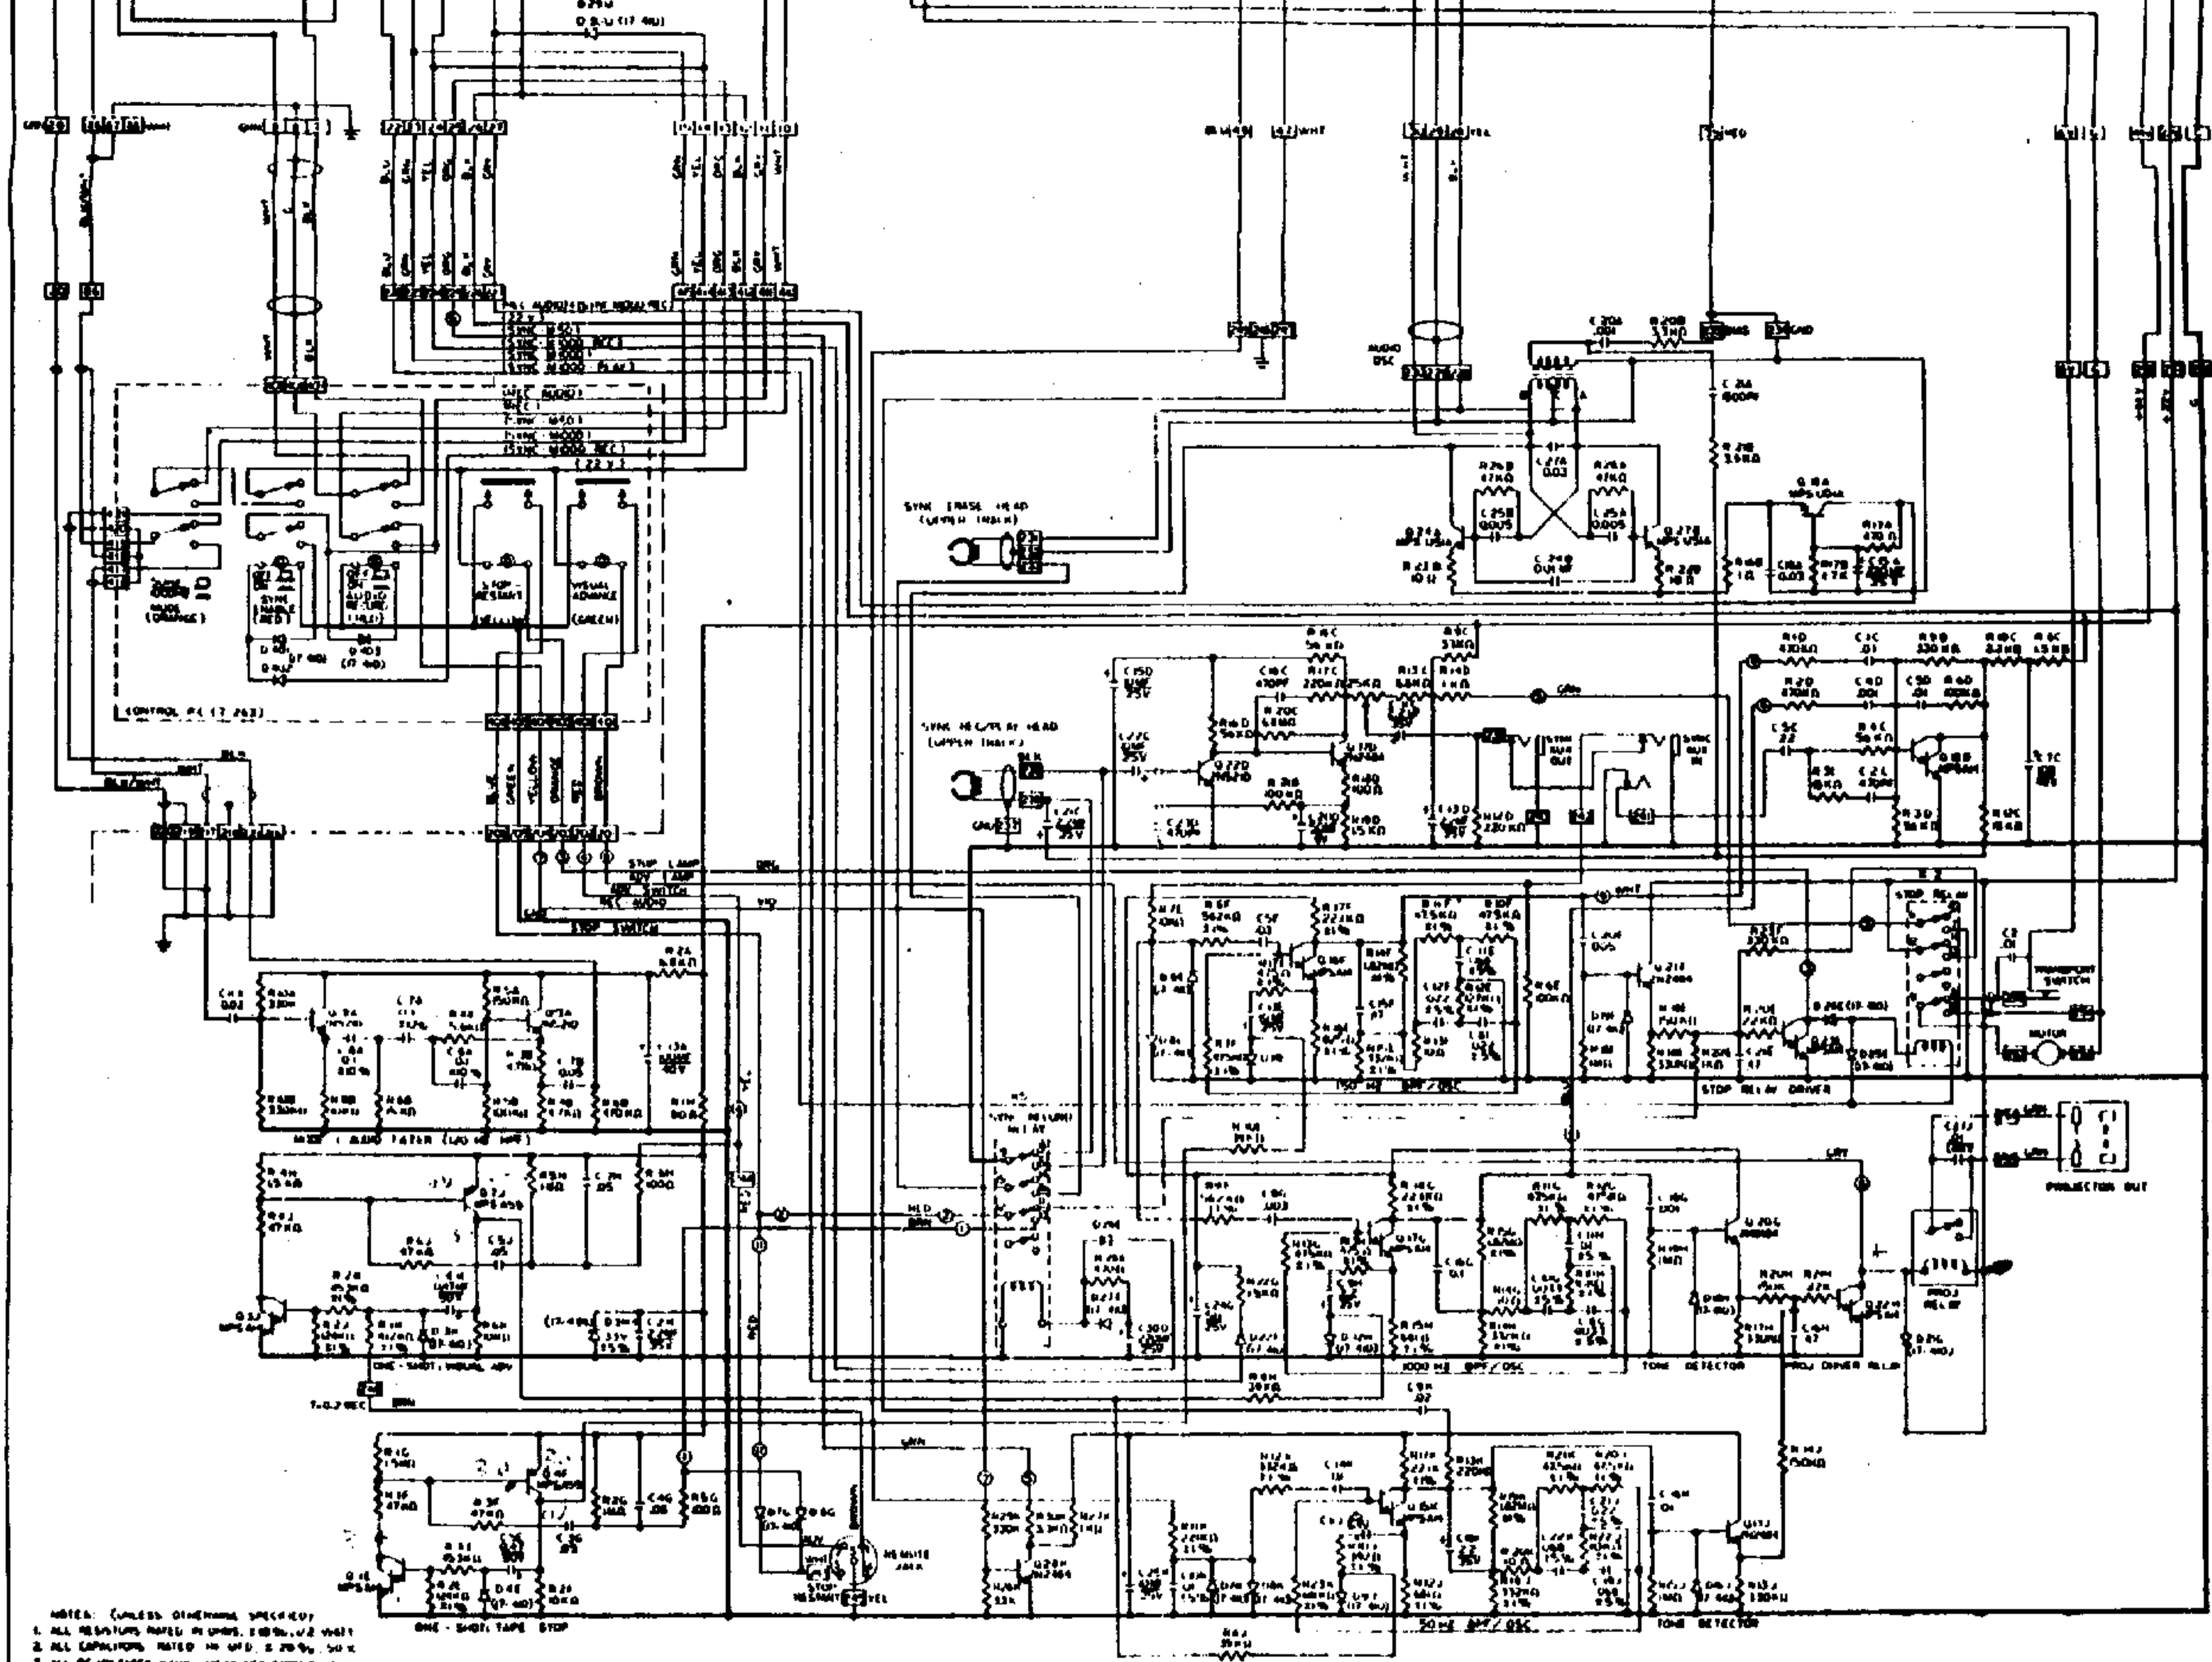



- NOTES: (UNLESS OTHERWISE SPECIFIED)
1. ALL RESISTORS NOTED IN OHMS, 100Ω, 1/2 WATT
  2. ALL CAPACITORS NOTED IN μFD, 5% TOL, 50 V
  3. ALL DC VOLTAGES GIVEN MEASURED FROM CHASSIS  
 N.C.V. INDICATES CIRCUITRY DISABLED  
 N.P.V. INDICATES CIRCUITRY ENABLED
  4. CALIFONE PART NUMBERS SHOWN IN ( )
  5. ALL COMPONENTS ARE LOCATED ON AN IN THE NUMBER LISTED.  
 POSITIVE (+) ON THE (7-262) SYNC P.C.  
 POSITIVE (+) ON THE (7-261) AUDIO P.C.
  6. FOR 250V/2A OPERATION, CONNECT THE 250V/2A RELAY WITH WHITE STRIPES WIRE TO THE 250V WIRE OF THE POWER SWITCH TERMINAL. CONNECT THE 250V/2A RELAY WITH BLACK STRIPES WIRE TO THE 0V POWER LINE WIRE.

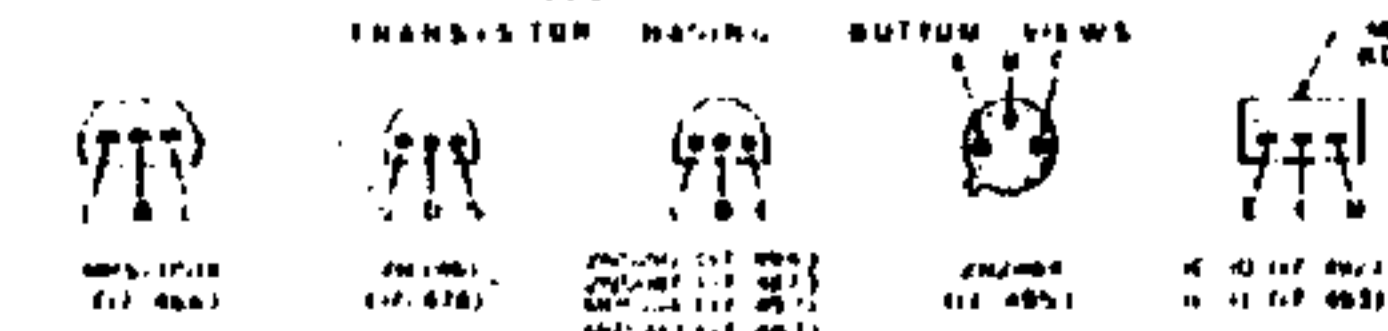

SCHEMATIC 3675 SYNC RECORDER  
 CALIFONE INTERNATIONAL, INC. 3-11-57 8-1357B

SCHEMATIC

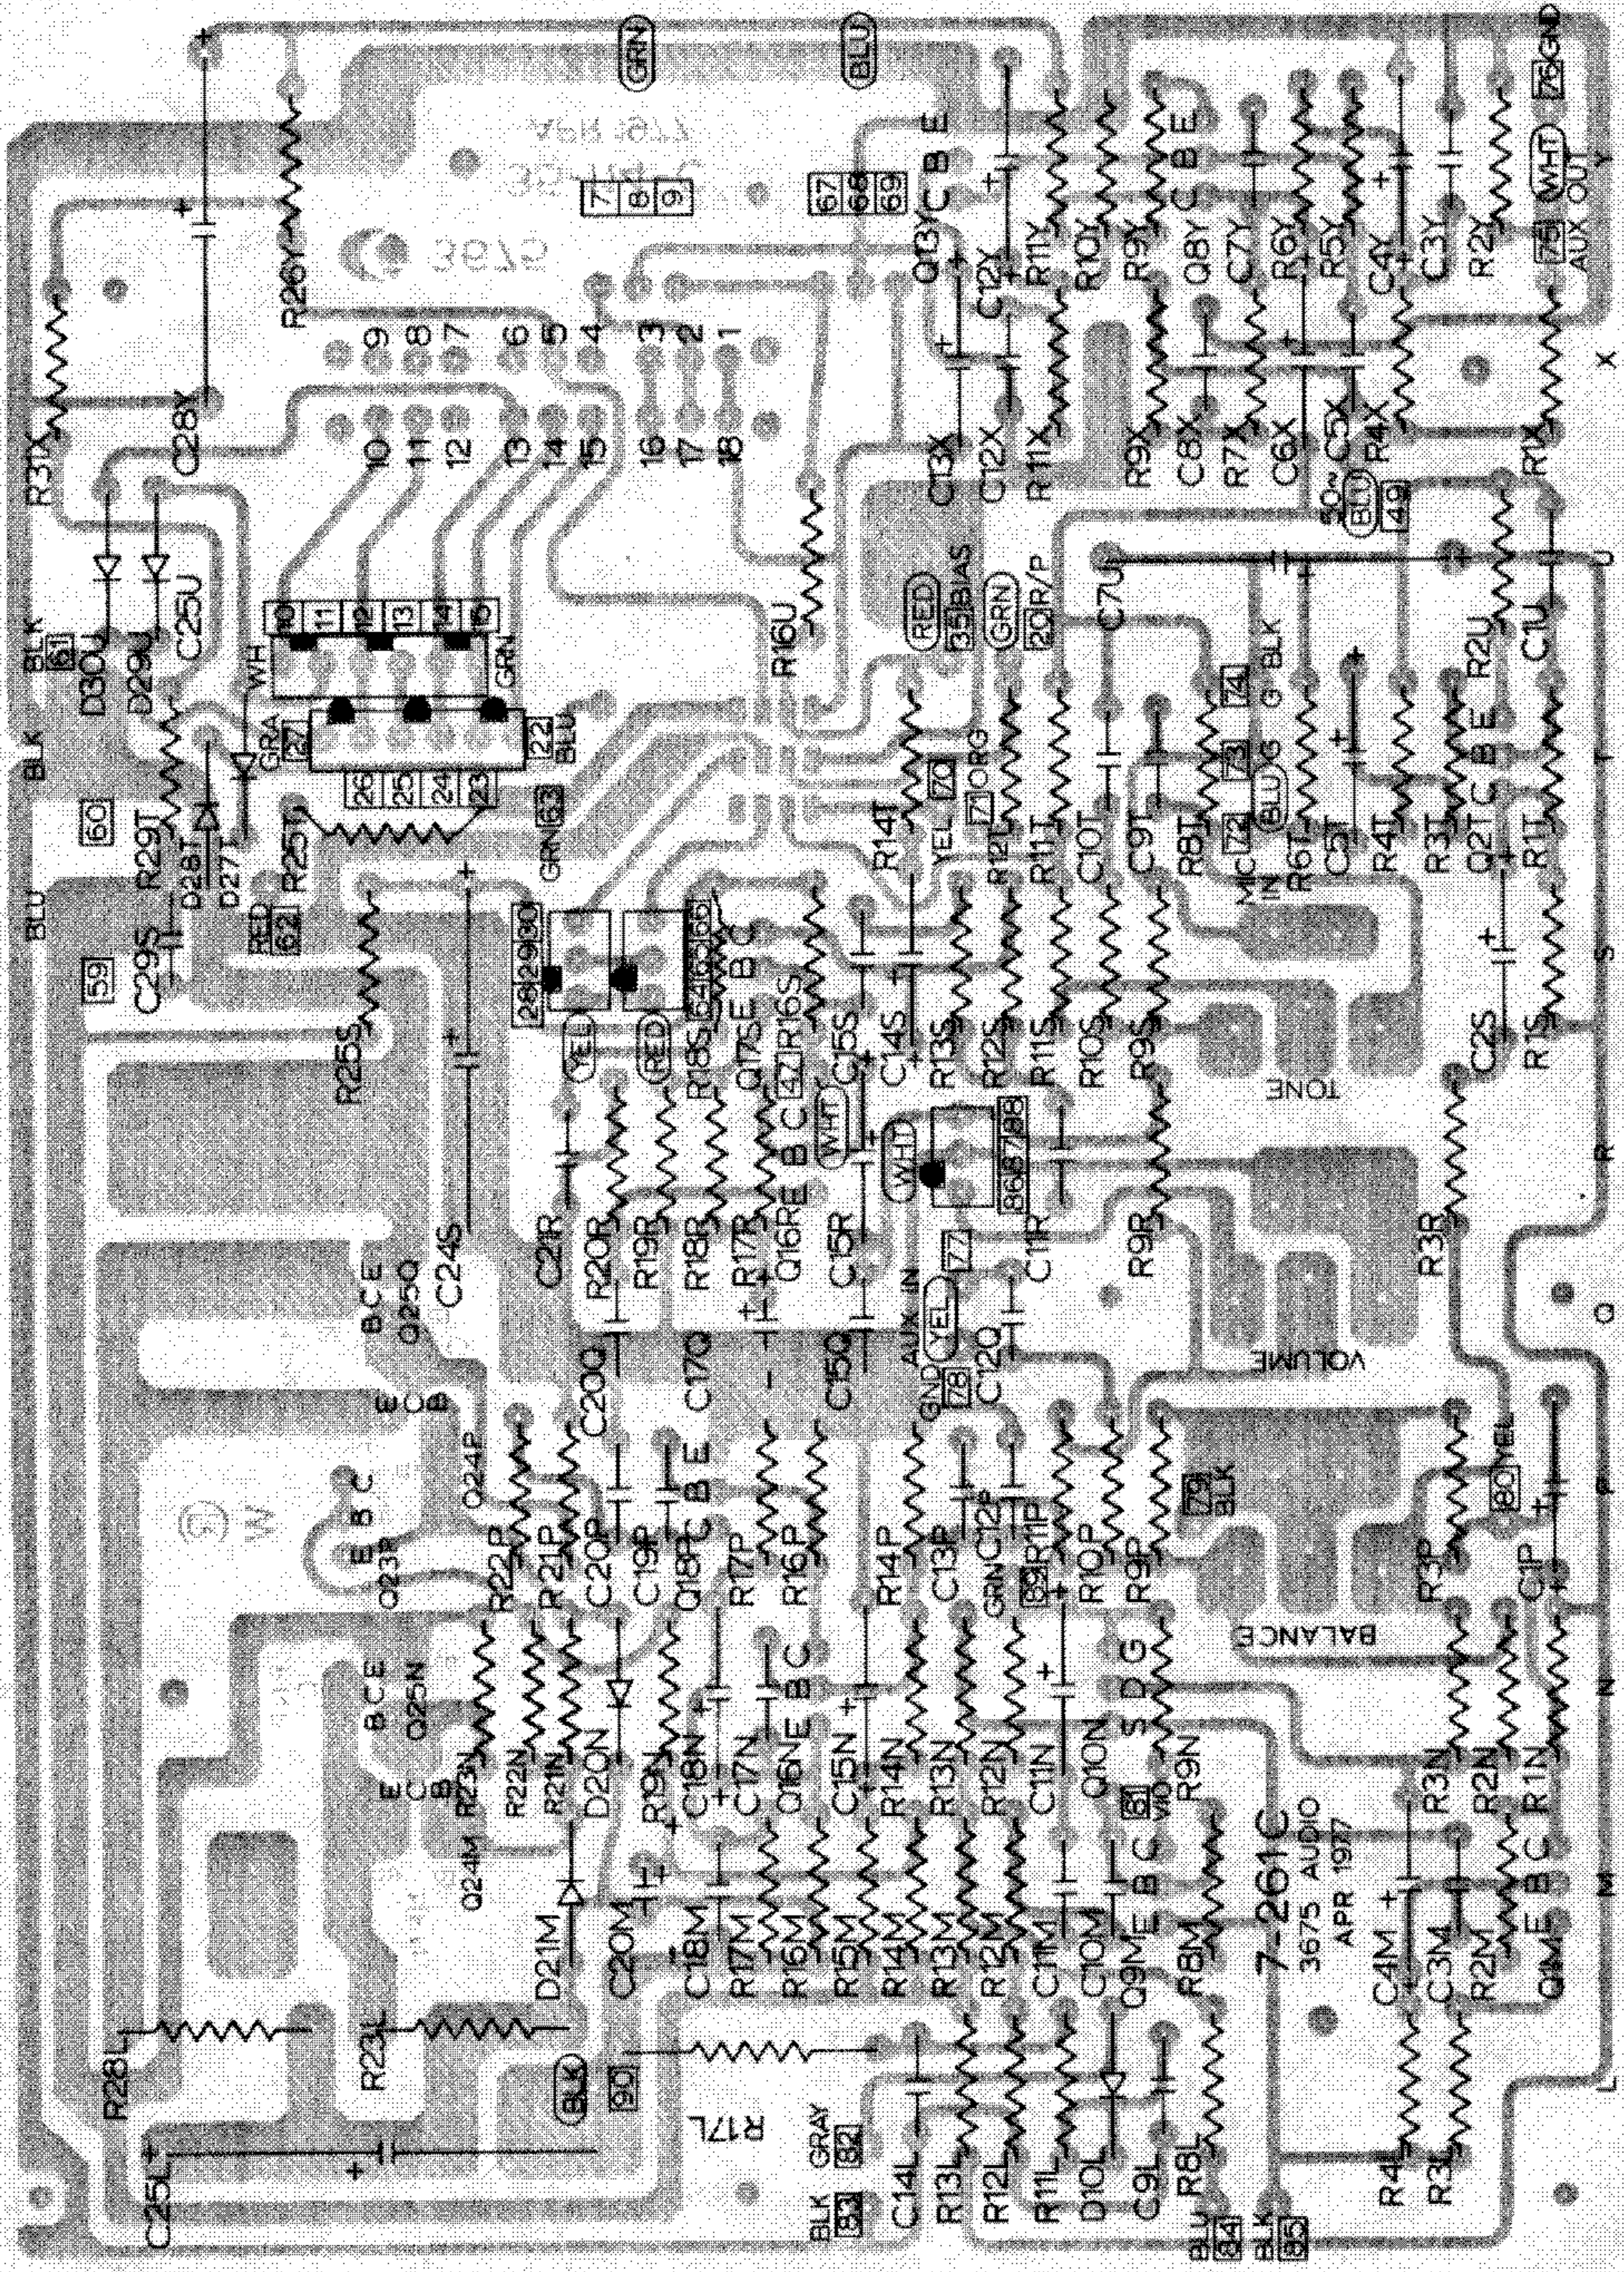

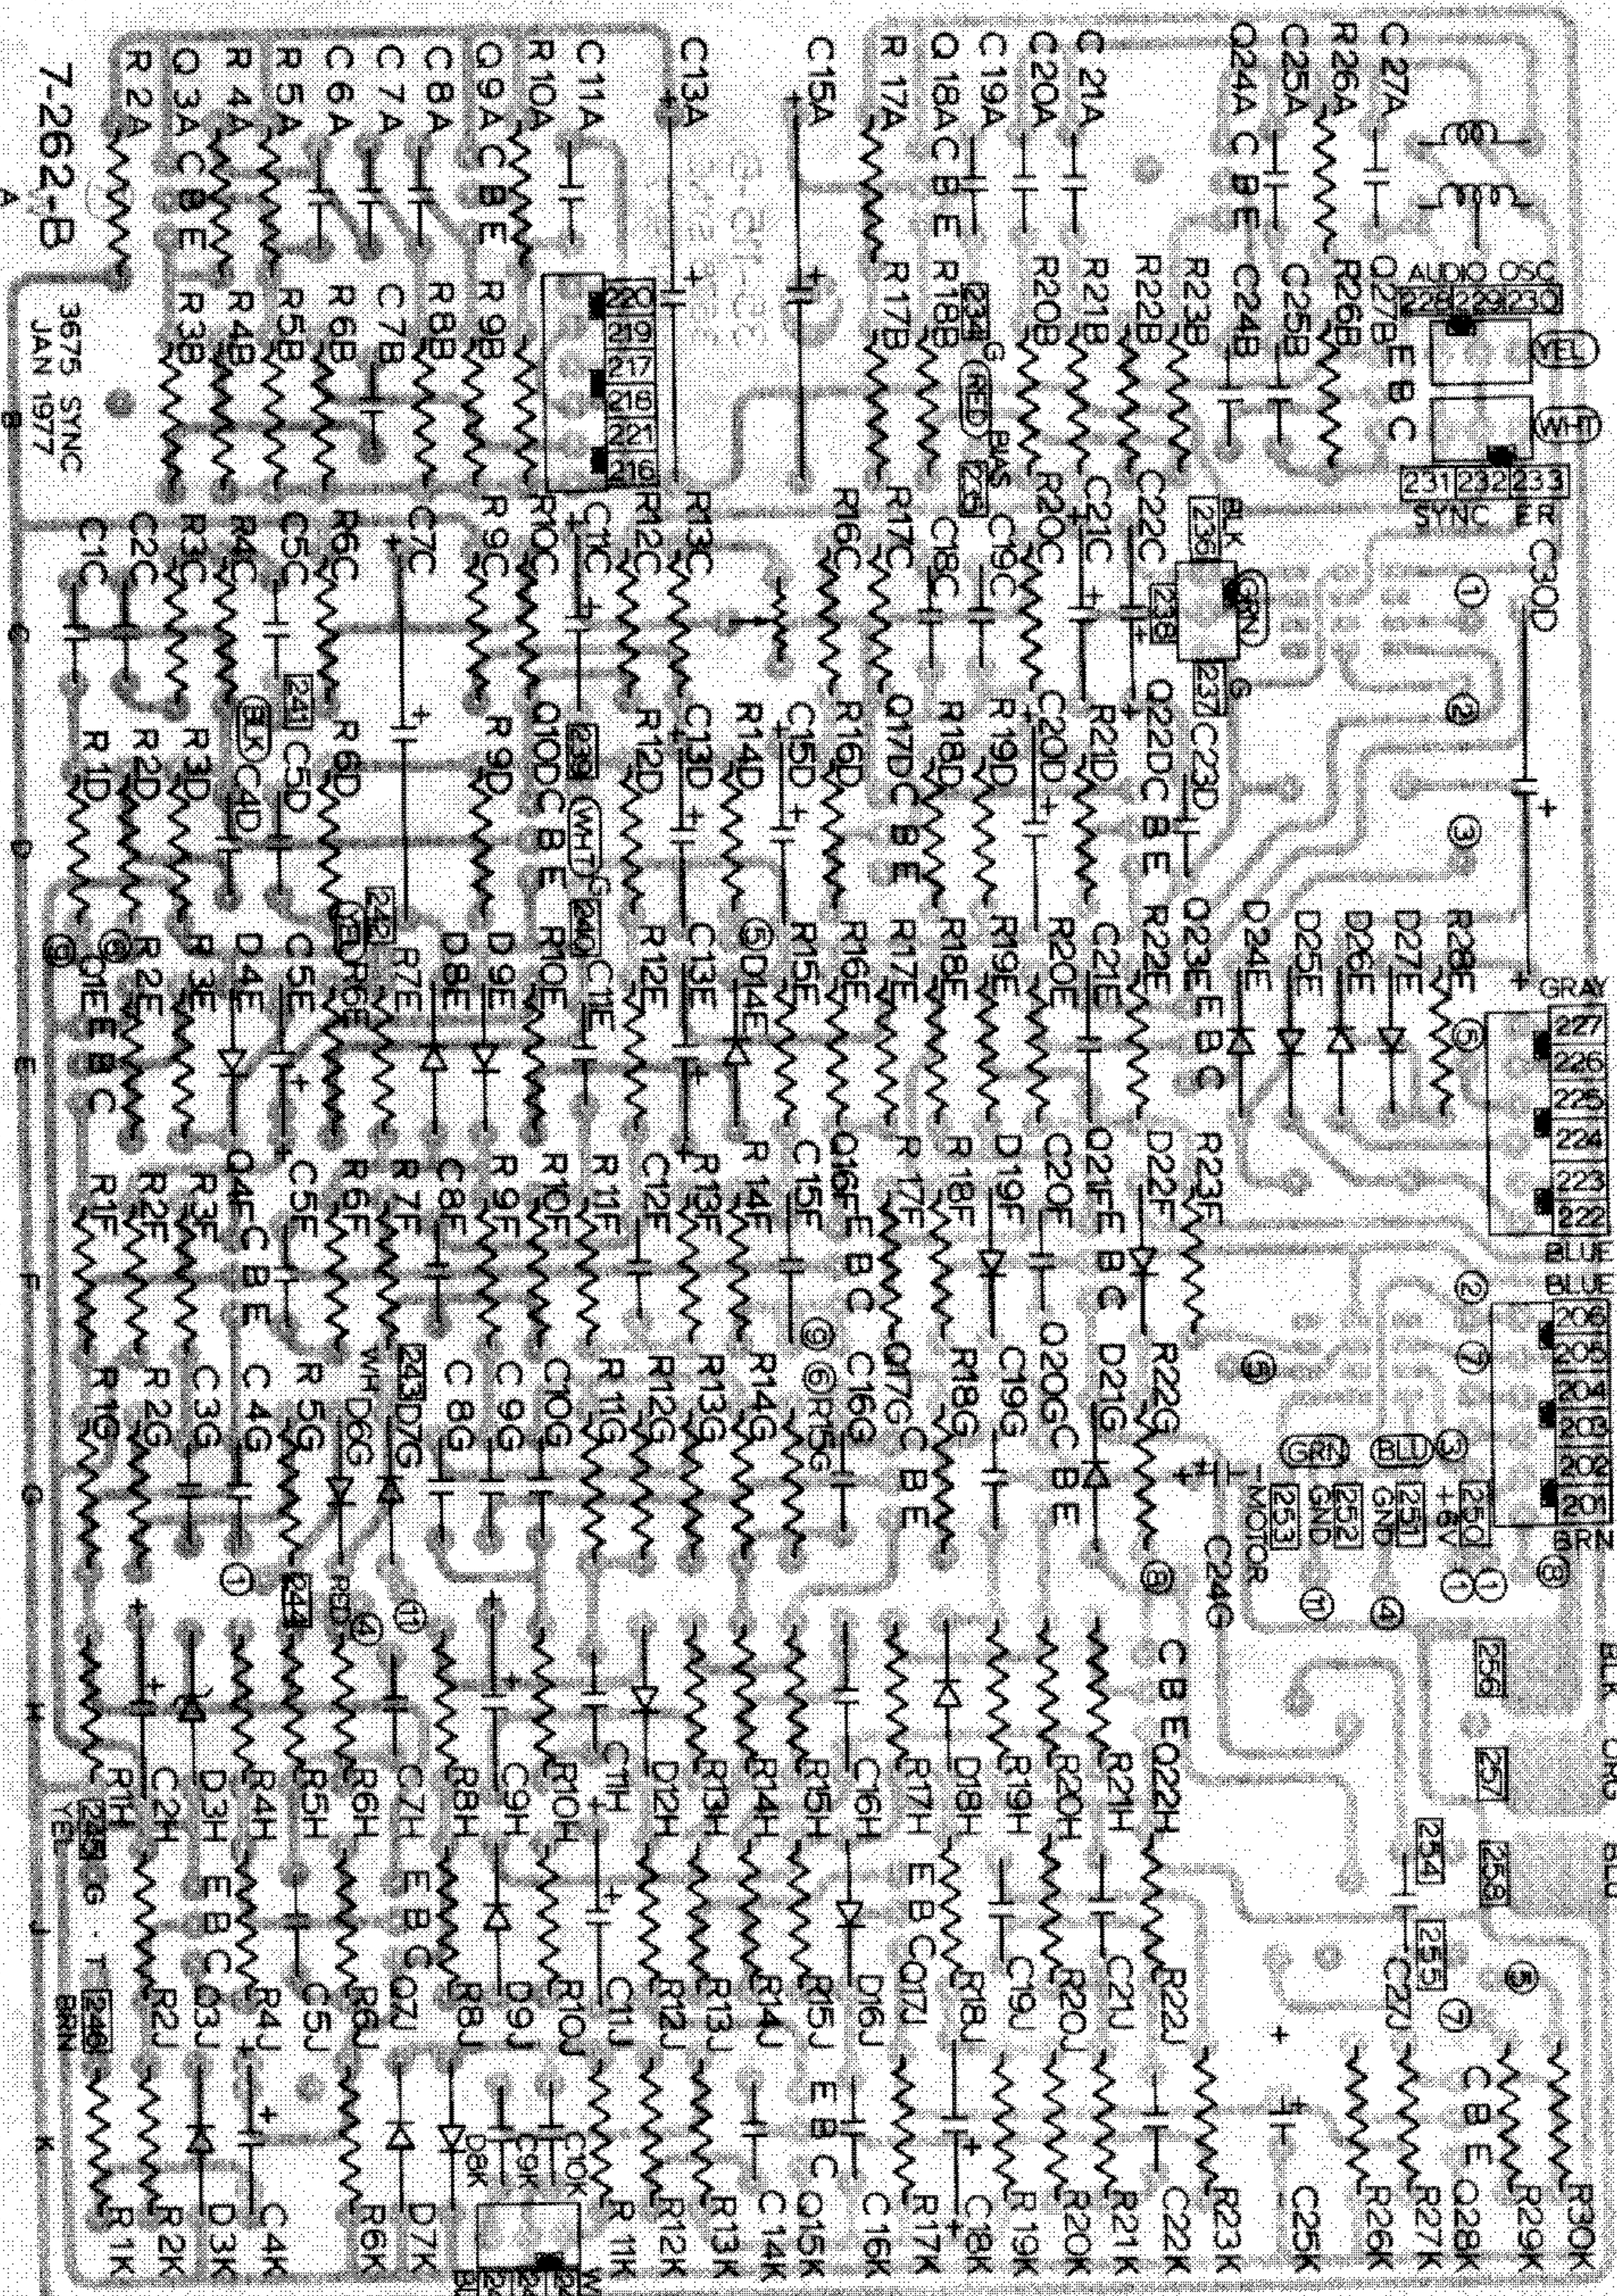

7-262-B  
3675 SYNC  
JAN 1977

BLK ORG BLU

WH 246  
248  
247  
BLK

TRANSPORT EXPLODED VIEW

