


POTENTIOMETERS:
 71190053 = 50K VPC LIN
 71190054 = 10K VPC LIN
 71190057 = 50K VPC LIN

CROSS REFERENCE LIST
 953 — SK 3919, 2N 3391
 SK 3919 — 953, 2N 3391
 SK 3586 — 2N 5951
 3904 — 2N 3904
 690 — 2N 4249
 3642 — 2N 3642
 3638 — 2N 3638
 EP-430 — TIP 31C
 EP-431 — TIP 30C


NOTES:
 ALL RESISTORS 1/4 W UNLESS NOTED
 ALL CAPACITORS IN MFD UNLESS NOTED
 C24 AND C25 MOUNTED ON TERMINAL STRIP
 LAST REFERENCE DESIGNATION USED:
 R - 36
 Q - 14
 CR - 7
 ALL DC VOLTAGE MEASUREMENTS MADE
 WITH FULL 120VAC SUPPLY, NO SIGNAL
 APPLIED, 8 OHM LOAD CONNECTED.
 * AT IDLE, INTO 8 OHMS

TEST CONDITIONS:
 MASTER GAIN - FULL
 ALL TONE CONTROLS AT 1200
 GAIN ADJUST FOR 10.5VRMS AT THE OUTPUT

BACKSTAGE® 30

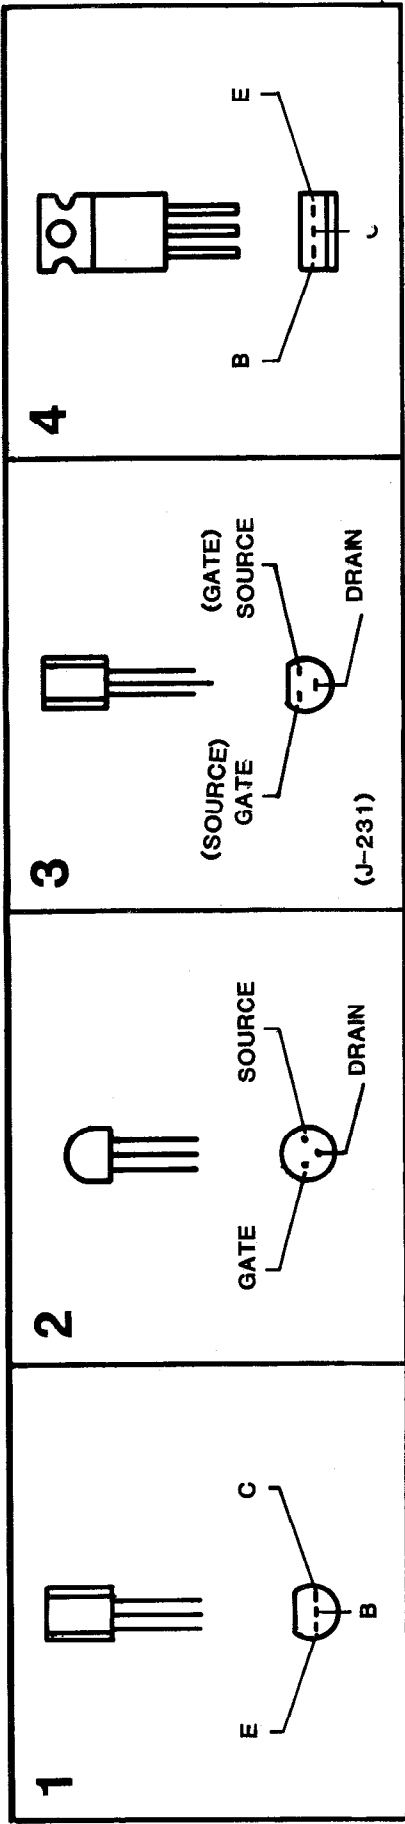

Bottom view illustrated

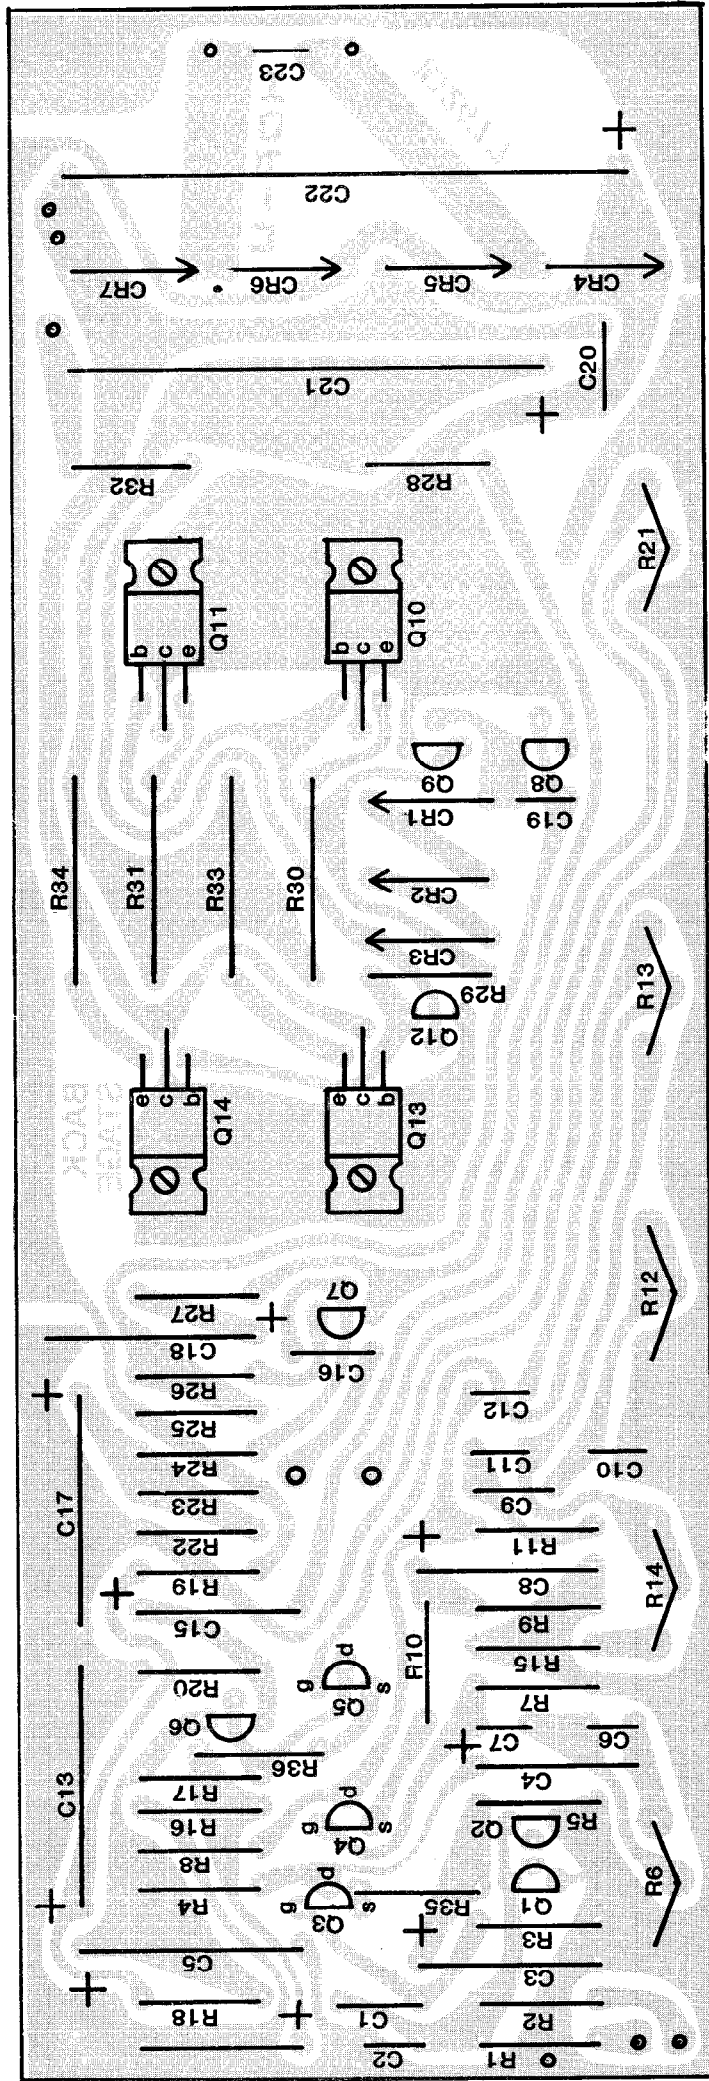

BACKSTAGE 30