
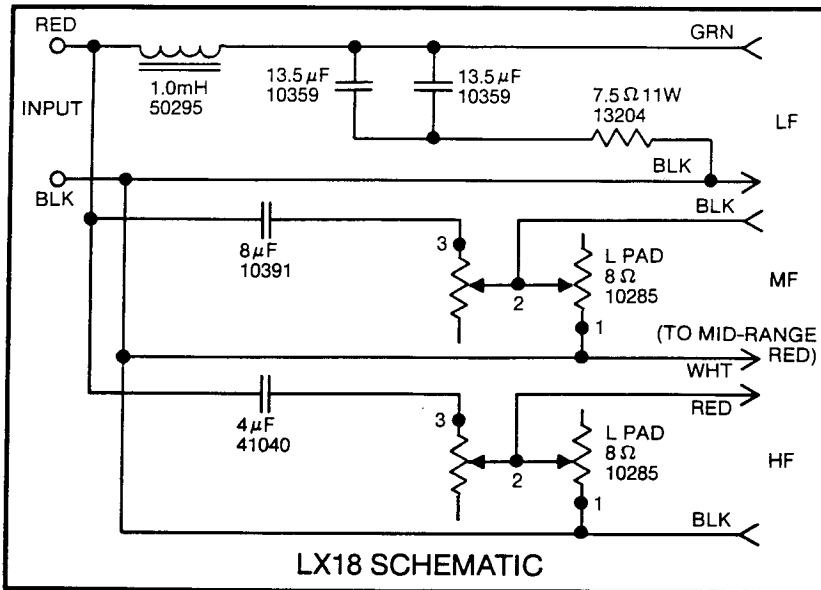


L45A/L45B Flair



SYSTEM NOTES:

In addition to its standard system, the Flair Enclosure could be ordered with these alternative JBL systems:

- 001 System: 130A/LE175DLH/N1200
- 030 System: D130/075/N2400
- S1 System: LE14A/LE175DLH/LX10
- S4 System: Same as S1 but with L91 Acoustic Lens
- S12 System: LE14A/LE20/LX8
- S7 System: LE15A/LE85/HL91/LX5
- S8 System: LE15A/375/HL93/075/LX5/N7000

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER: 135A
 Cone Kit: C8R2235
 Nom. Impedance: 8 Ohm
 Dynamic Test Input V: 10
 Sweep Frequency Hz: 20-1200
 D.C. Resistance Ohms: 5.7 minimum
 6.9 maximum
 Gap Gauge: .057"
 Notes: Aquaplas On Cone.

Drivers with 2 step frame edge require gasket P/N 53880

If Not Serviceable,

Replace With: 2235H
 Visual Change: Yes
 Baffle Modification: No
 Exact Acoustic Replacement: No.
 Slightly different. Replace both units in a stereo pair.

MID RANGE DRIVER: LE5-5
 Cone Kit: C8RLE59
 Nom. Impedance: 8 Ohm
 Dynamic Test Input V: 4
 Sweep Frequency Hz: 75-3000
 D.C. Resistance Ohms: 5.6 minimum
 6.6 maximum
 Gap Gauge: .040"
 Notes:

If Not Serviceable,

Replace With: LE5-11
 Visual Change: Yes
 Baffle Modification: No
 Exact Acoustic Replacement: No.
 Slightly different. Replace both units in a stereo pair.

MID RANGE DRIVER (Cont'd)

Additional Parts Currently Available*:

Dome: Was 54721 (Paper); Now 51868 (Alum.)
 Trim Gasket: 29931

HIGH FREQUENCY DRIVER:

LE25
 Diaphragm Kit: D8RLE25
 Nom. Impedance: 8 Ohm
 Dynamic Test Input V: 3
 Sweep Frequency Hz: 500-1200
 D.C. Resistance Ohms: 3.7 minimum
 4.2 maximum

Gap Gauge:

Notes:

.029"
 Kit includes parts

for similar models. Use required parts only.

If Not Serviceable,

Replace With: 035TiA
 Visual Change: Yes
 Baffle Modification: Yes
 Exact Acoustic Replacement: No.
 Slightly different. Replace both units

in a stereo pair.

Additional Part Currently Available*:

Trim Ring: 50402
 Mounting Gasket: 50949-01
 Dome: 21606

SYSTEM SPECIFICATIONS:

Nominal Impedance: 8 Ohm
 Power Capacity: 75 Watts
 Continuous Program
 Crossover Frequencies: 1200 Hz, 7500 Hz
 Sensitivity: 80dB (1 Watt @ 15 Feet)
 Enclosure Dim: 21-3/4" x 29-5/8" x 17-3/4" D
 55cm x 75cm x 45cm
 Shipping Weight: 108 lbs. - 49 kg.
 Additional Parts Currently Available*:
 Binding Posts: Red: 10243
 Black: 10244

*Other parts may also be available. Check with JBL for details.